

**Mag** **Vise** **Magnetic Workholding**


**EEPM**

Electro-Permanent Magnetic Chuck

**ECB**

Permanent Magnetic Clamping Block

# EARTH-CHAIN



**EARTH-CHAIN ENTERPRISE CO., LTD.**

 **Taiwan**  
Corporation



## **Professional Manufacturer of Magnetic Tools**


Established in 1988, Earth-Chain Enterprise Co., Ltd. is a professional manufacturer of magnetic tools. The MagVise Magnetic Workholding 'Electro-Permanent Magnetic Chuck EEPM Series' and New Dovetail Microinching Equipment was awarded 'Good Design Product Mark' by the Industrial Development Bureau, Ministry of Economic Affairs and the 18th Taiwan Excellence Award, the "Electro-Permanent Magnetic Chuck Connection Type EEPM-C Series" was awarded the 19th Taiwan SMEs Innovation Award and the 21st Taiwan Excellence Award, and the MagVise Magnetic Workholding 'Permanent Magnetic Clamping Block ECB Series' was awarded the 16th Taiwan Excellence Award. With ISO 9001:2015 and CE Certification as well as over 30 patents, Earth-Chain's private label 'E.C.E' is sold worldwide across five continents. Besides above mentioned products, there are also Lifting Magnet Series, Universal Arm Magnetic Stand Series, Drill Grinder & End Mill Re-Sharpener Series...etc. Earth-Chain is a professional magnetic system tool manufacturer with agents and distributors from over 40 countries.

Innovation, honesty, and responsibility are our business philosophies that we are truthfully fulfilling. By innovatively devoting our efforts in product developments, honestly responding to our customers, and responsibly engaging in sustainable operations and managements, we always strive to improve our working processes, enhance our quality control and improvement ability, and develop products that constantly exceed customers expectations. Not only do we aim to achieve the objective- making the  **EARTH-CHAIN** the leading brand in the field of magnetic vise clamping systems, but we also set a high expectation for ourselves to create glories in the machining and metalworking industry.



**2**

**EEPM-A**

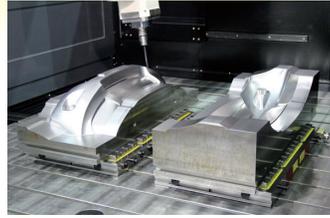

**3**

**EEPM-B**



**4**

**EEPM-D**



**5**

**EEPM-E**

Electro-Permanent Magnetic Chuck EEPM-A Series  
Pole Size 35X35 mm, Flux Line 15 mm

**2**

Electro-Permanent Magnetic Chuck EEPM-B Series  
Pole Size 50X50 mm, Flux Line 25 mm

**3**

Electro-Permanent Magnetic Chuck EEPM-D Series  
Pole Size 70X70 mm, Flux Line 40 mm

**4**

Electro-Permanent Magnetic Chuck EEPM-E Series  
Pole Size 92X92 mm, Flux Line 50 mm

**5**

Induction Block EEPM-IB Series  
Suitable for Increased using life of magnetic chuck

**6**

Induction Block EEPM-IBT Series  
Suitable for slope finishing of workpiece machining

**8**

Spring Block EEPM-SP Series  
Suitable for clamping on iron cast, irregular form and flexuous workpieces

**9**

Induction Sub Plate EEPM-ISP Series  
Suitable for quantity of irregular and smaller workpiece

**9**

Other Option Accessories

**10**

**6**

**EEPM-IB**



**8**

**EEPM-IBT**



**9**

**EEPM-SP**



**9**

**EEPM-ISP**





**15** **EEPM-V**



**17** **EEPM-IT**



**19** **EEPM-CIT**



**21** **EEPM-CIR**

**Electro-Permanent Magnetic Chuck EEPM-SL/TA Series**  
Can be use together with mechanical clamping tools **14**

**Electro-Permanent Magnetic Chuck EEPM-V Series**  
Suitable for CNC horizontal machining center **15**

**Electro-Permanent Magnetic Chuck EEPM-IT Series**  
Suitable for horizontal milling & boring machine on precision machining of division. **17**

**Electro-Permanent Magnetic Chuck EEPM-CIT Series**  
Suitable in use for combine with CNC 4 Axis Index Device **19**


**Electro-Permanent Magnetic Chuck EEPM-CIR Series**  
Suitable for use on Vertical Lathe, CNC 5 Axis Machining Center ...etc **21**

**Custom-Made EEPM Chucks**  
Custom-chucks built to yor specification **32**

**Electro-Permanent Magnetic Chuck-Connection Type EEPM-C Series**  
Suitable for use on large Vertical Lathe, Double Column Machining Center and CNC Machining Center ...etc. **34**

**Permanent Magnetic Clamping Block ECB Series**  
Suitable for use on large Vertical Lathe, Double Column Machining Center and CNC Machining Center ...etc. **42**

**Permanent Magnetic Clamping Block ECB-120V12 Series**  
Suitable for use on CNC Horizontal Machining Center. **45**

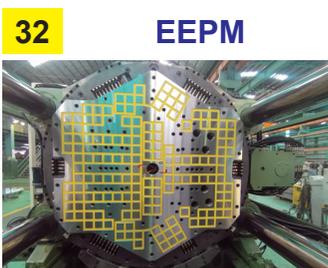



# Mag Vise

## Electro-Permanent Magnetic Chuck EPPM-A、EPPM-B、EPPM-D、EPPM-E Series

### Magnetic Workholding

■ Suitable for CNC Vertical machining center (Can do 5 sides machining)

#### Features:

- 1-2 seconds control for power ON & OFF. No electric power supply required to keep magnetic chuck ON and provides maximized safety in case of power failure. Never get temperatures to affect the accuracy of workpieces.
- With 8 Magnetic levels for different workpiece size and application to avoid sticking the iron chip.
- Capable for 5 sides machining and un-obstructed cutter movement during machining. Allow workpiece machining finished in one cycle, while still achieving best machining accuracy and highly increased working efficiency.
- Easy and convenient to clamp a workpiece, shortens clamping time.
- Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
- More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

#### Specification of poles size & Height of magnetic field (Flux Line):





EPPM Chucks are designed for different mold thickness. Specify the mold to be Large, Medium and Small sizes make 4 poles sizes, bigger pole size with higher flux line. Different pole sizes have different magnetic field height (flux line) to ensure mold clamping safety.

**EPPM-A Series**  
Flux Line 15 mm

**EPPM-B Series**  
Flux Line 25 mm

**EPPM-D Series**  
Flux Line 40 mm

**EPPM-E Series**  
Flux Line 50 mm

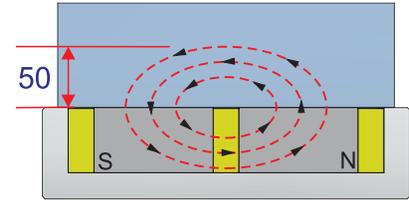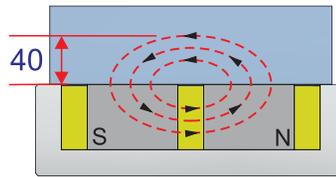

Model No.	pole size	Flux line	Workpiece	Application	Magnetic force
EPPM-A	35X35 mm	15 mm	Thin, small	Cutting, milling	580 ±5% Kg/4 poles
EPPM-B	50X50 mm	25 mm	Small, medium		1250 ±5% Kg/4 poles
EPPM-D	70X70 mm	40 mm	Medium, large		2800 ±5% Kg/4 poles
EPPM-E	92X92 mm	50 mm	Large		4800 ±5% Kg/4 poles






Pole 35X35 mm, Flux Line 15 mm, Magnetic Force 580±5% kgf/4 Poles

**Applications:**

1. Suitable for thin, small and medium workpiece on light duty machining.
2. Suitable for thin, small and medium workpiece of the drilling and finishing machining.
3. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
4. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

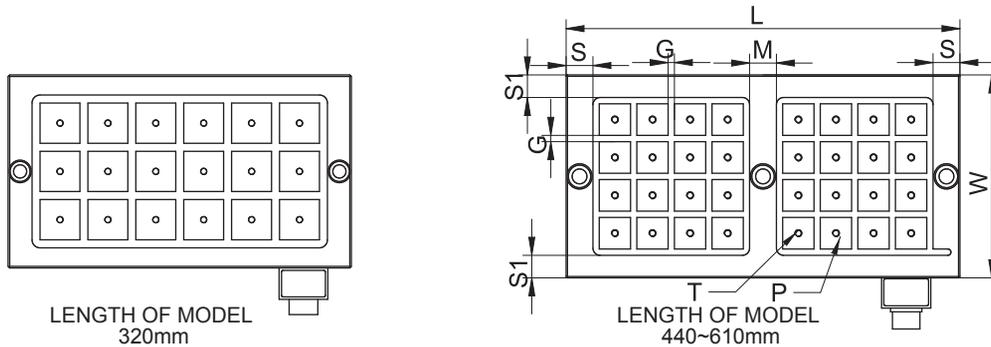

Unit:mm

MODEL NO.	DIMENSION							PITCH G	POLE P	NO. OF POLE	Unipolar suction kgf ±5%	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	T	H									
EEPM-1530A	185	320	30.5	26	-				18		2610	23kg	AC 220V 480V	18A	C1	
EEPM-2540A	225	440	30	25	30			32		4640	39kg	30A		C1		
EEPM-2560A	225	610	31	25	30			48		6960	54kg	26A		C2		
EEPM-3030A	310	320	30.5	25.5	-			36		5220	39kg	26A		C1		
EEPM-3040A	310	440	30	25.5	30	M6	50	7	35×35	48	6960	53kg		25A	C2	
EEPM-3060A	310	610	31	25.5	30			72		10440	74kg	31A		C2		
EEPM-4040A	435	440	30	25	30			72		10440	75kg	31A		C2		
EEPM-4050A	435	525	30.5	25	30			90		13050	90kg	24A		C4		
EEPM-4060A	435	610	31	25	30			108		15660	104kg	26A		C4		

Custom-made is available.



# Mag Vise


## Magnetic Workholding

### Electro-Permanent Magnetic Chuck EEPM-B Series

■ Suitable for CNC Vertical machining center (Can do 5 sides machining)



Pole 50X50 mm, Flux Line 25 mm, Magnetic Force 1250±5% kgf/4 Poles

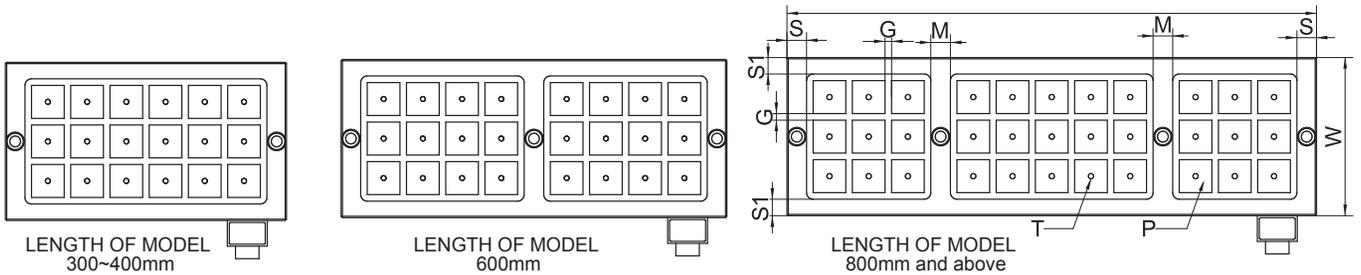

Unit:mm

MODEL NO.	DIMENSION								PITCH G	POLE P	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	T	H												
EEPМ-2540B	240	430	30	25	--					18	5600	50kg		18A	C1		16A	C1	
EEPМ-2560B	240	590	30	25	30					24	7500	69kg		30A	C1		12A	C1	
EEPМ-2580B	240	810	30	25	30					33	10300	92kg		30A	C1		19A	C1	
EEPМ-2590B	240	870	30	25	30					36	11200	98kg		18A	C2		18A	C1	
EEPМ-25100B	240	990	30	25	30					42	13100	111kg		26A	C2		14A	C2	
EEPМ-3030B	300	310	30	25	--					16	5000	44kg		20A	C1		8A	C1	
EEPМ-3040B	300	430	30	25	--					24	7500	61kg		30A	C1		12A	C1	
EEPМ-3060B	300	590	30	25	30					32	10000	82kg		30A	C1		20A	C1	
EEPМ-3080B	300	810	30	25	30					44	13700	116kg		25A	C2		13A	C2	
EEPМ-3090B	300	870	30	25	30					48	15000	123kg		30A	C2		12A	C2	
EEPМ-30100B	300	990	30	25	30					56	17500	138kg		35A	C2		19A	C2	
EEPМ-4040B	420	430	30	25	--					36	11200	84kg		18A	C2		18A	C1	
EEPМ-4050B	420	490	30	25	--	M8	60	10	50x50	42	13100	95kg	AC 220V	26A	C2	AC 380V 440V	14A	C2	
EEPМ-4060B	420	590	30	25	30					48	15000	100kg		30A	C2		12A	C2	
EEPМ-4080B	420	810	30	25	30					66	20600	159kg		30A	C2		19A	C2	
EEPМ-4090B	420	870	30	25	30					72	22500	169kg		18A	C4		18A	C2	
EEPМ-40100B	420	990	30	25	30					84	26200	193kg		26A	C4		12A	C4	
EEPМ-5060B	480	590	30	25	30					56	17500	129kg		35A	C2		19A	C2	
EEPМ-5080B	480	810	30	25	30					77	24000	185kg		30A	C4		13A	C4	
EEPМ-5090B	480	870	30	25	30					84	26200	196kg		26A	C4		14A	C4	
EEPМ-50100B	480	990	30	25	30					98	30600	219kg		30A	C4		12A	C4	
EEPМ-6060B	600	590	30	25	30					72	22500	165kg		18A	C4		18A	C2	
EEPМ-6080B	600	810	30	25	30					99	30900	215kg		30A	C4		19A	C4	
EEPМ-6090B	600	870	30	25	30					108	33700	240kg		27A	C4		20A	C4	
EEPМ-60100B	600	990	30	25	30					126	39300	274kg		32A	C4		21A	C4	
EEPМ-8080B	755	810	30	25	30					121	37800	271kg		33A	C4		18A	C4	


Custom-made is available.



Pole 70X70 mm, Flux Line 40 mm, Magnetic Force 2800±5% kgf/4 Poles

**Applications:**

1. Suitable for medium and large workpiece on heavy duty machining.
2. Suitable for medium and double column machining center.
3. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
4. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

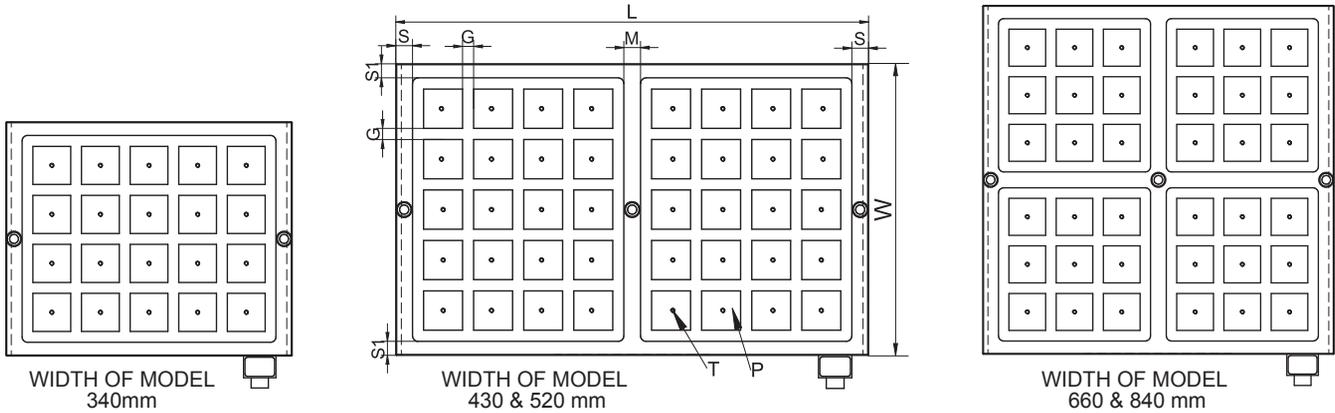

Unit:mm

MODEL NO.	DIMENSION							PITCH G	POLE P	NO. OF POLE	Unipolar suction kgf ±5%	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	T	H												
EEPM-3060D	340	670	30	25	30				18		12600	126kg		24A	C2		25A	C1	
EEPM-4050D	430	530	30	25	--				20		14000	126kg		13A	C2		22A	C1	
EEPM-4060D	430	670	30	25	30				24		16800	159kg		24A	C2		29A	C1	
EEPM-4080D	430	850	30	25	30				32		22400	202kg		16A	C4		27A	C2	
EEPM-5060D	520	670	30	25	30	M10	70	20	30	700	21000	193kg	AC 220V	19A	C2	AC 380V 440V	17A	C2	
EEPM-5080D	520	850	30	25	30				40		28000	244kg		13A	C4		22A	C2	
EEPM-6060D	660	670	30	25	30				36		25200	245kg		15A	C4		25A	C2	
EEPM-6080D	660	850	30	25	30				48		33600	310kg		24A	C4		29A	C2	
EEPM-8080D	840	850	30	25	30				64		44800	395kg		32A	C8		27A	C4	

Custom-made is available.



**Mag Vise**  
Magnetic Workholding

**Electro-Permanent Magnetic Chuck EEPM-E Series**



■ Suitable for CNC Vertical machining center (Can do 5 sides machining)



Pole 92X92 mm, Flux Line 50 mm, Magnetic Force 4800±5% kgf/4 Poles

**Applications:**


1. Suitable for large and high-thickness workpiece
2. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
3. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

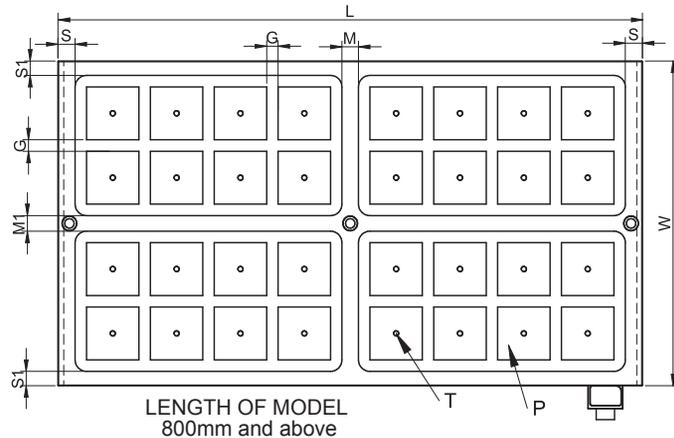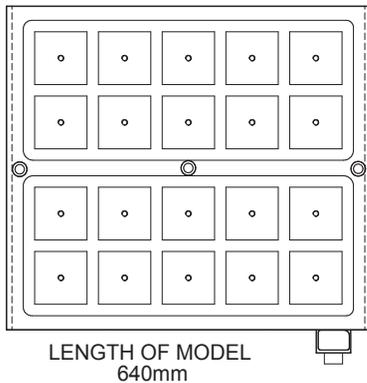

Unit:mm

MODEL NO.	DIMENSION								PITCH G	POLE P	NO. OF POLE	Unipolar suction kgf ±5%	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	M1	T	H									
EEPM-6060E	565	640	30	25	--	27				20		24000	214kg	AC 380V ↕ 440V	24A	C2	
EEPM-60100E	565	1025	30	25	29	27			32		38400	343kg	13A		C4		
EEPM-60120E	565	1250	30	25	30	27			40		48000	418kg	24A		C4		
EEPM-8080E	790	800	30	25	28	28	M10	70	36	1200	43200	374kg	26A		C4		
EEPM-80100E	790	1025	30	25	29	28			48		57600	480kg	19A		C4		
EEPM-80120E	790	1250	30	25	30	28			60		72000	585kg	15A		C8		

Custom-made is available.

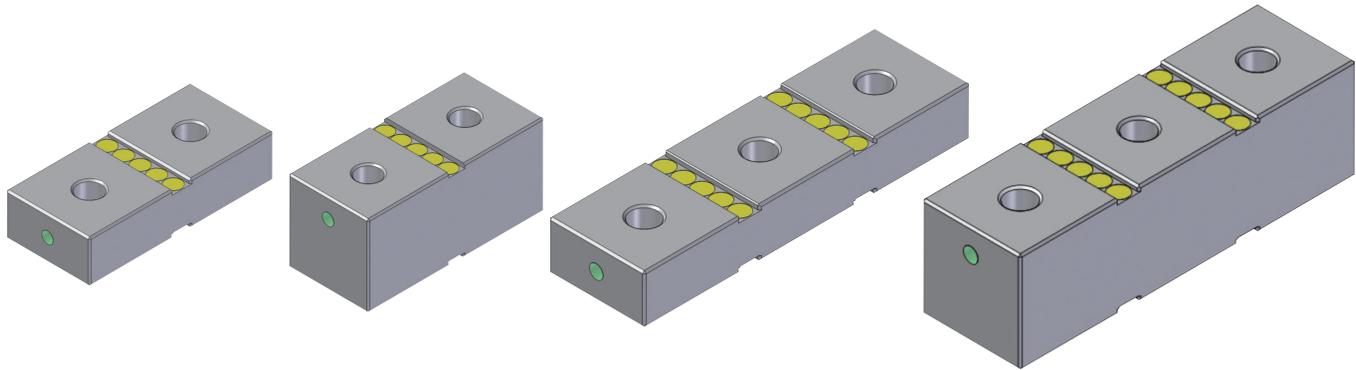


**Features:**

1. Induction Block EEPM-IB series are use with EEPM chucks, can be increased to more functions on workholding.
2. Increased using life of magnetic chuck: We suggest always use induction block to clamp workpieces, due to workpiece will not touch to the surface of chucks it can be keep chucks always be new.
3. Convenience and Accuracy: Induction Block are interchanging & consuming accessories, you can machining surface or forming induction blocks for the workpiece required by the machine directly, so the parallelism of induction block will always 100% match to the machine.

■ EEPM-IBA Suitable for use on EEPM-A Series Chucks.

Unit:mm

MODEL NO.	NO. OF POLE	W	L	HEIGHT	P	G
EEPM-IB215A	2	35	77	15	35	7
EEPM-IB315A	3	35	119	15	35	7




NO. OF POLE : 2

■ EEPM-IBB Suitable for use on EEPM-B Series Chucks.

Unit:mm

MODEL NO.	NO. OF POLE	W	L	HEIGHT	P	G
EEPM-IB225B	2	50	110	25	50	10
EEPM-IB325B	3	50	170	25	50	10
MODEL NO.	NO. OF POLE	W	L	HEIGHT	P	G
EEPM-IB250B	2	50	110	50	50	10
EEPM-IB350B	3	50	170	50	50	10

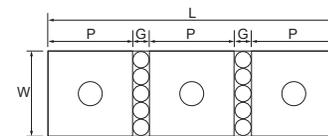

NO. OF POLE : 3

■ EEPM-IBD Suitable for use on EEPM-D Series ChUuncikt:sm.

Unit:mm

MODEL NO.	NO. OF POLE	W	L	HEIGHT	P	G
EEPM-IB225D	2	70	160	25	70	20
EEPM-IB325D	3	70	250	25	70	20

■ EEPM-IBE Suitable for use on EEPM-E Series Chucks.

Unit:mm

MODEL NO.	NO. OF POLE	W	L	HEIGHT	P	G
EEPM-IB225E	2	92	204	25	92	20
EEPM-IB325E	3	92	316	25	92	20

**Relative magnetic force and height of EEPM-IB percentage table**




Height of Induction Block	0	25mm	50mm
Holding Power Kgf %	100 %	82 %	60 %




**Example:**




EEPm chuck	Induction Block	Total Holding Power
EEPm-2560B	None	7,500±5% kgf
EEPm-2560B	IB225B x 24pcs	6,150±5% kgf (7,500x82%)



**Working Example**

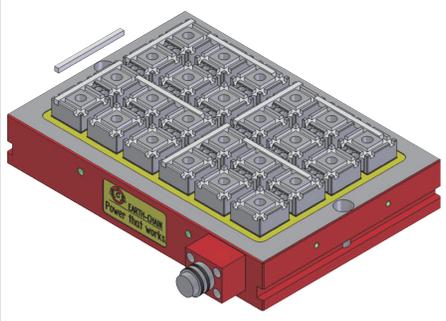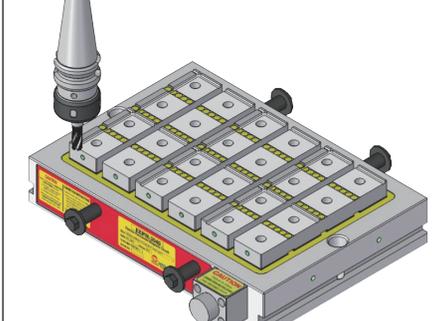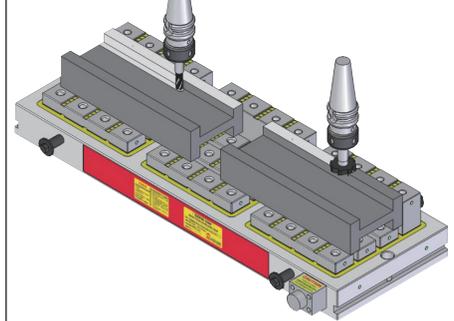 	 	
<p>Directly processing the grooves on induction block and placing the bars in demand for multi-workpiece on 5 sides machining.</p>	<p>Machining slots and steps on IB for positioning multi-workpiece on 5 sides machining.</p>	<p>Used 25mm &amp; 50mm height of IB for positioning multi-workpiece on surface machining.</p>

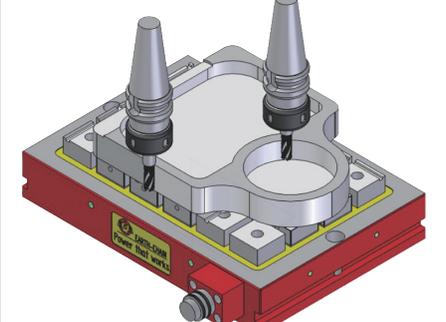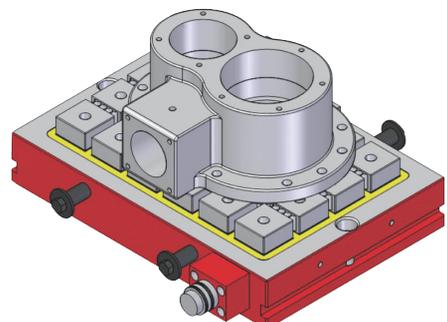
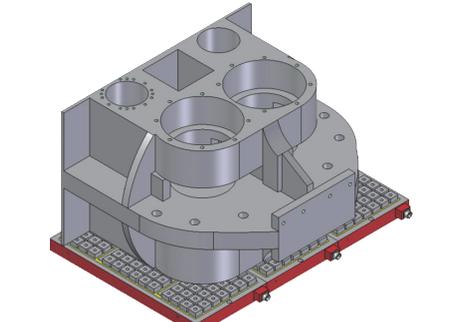
		
<p>Using height 25mm induction block for irregular workpiece on 5 sides machining.</p>		

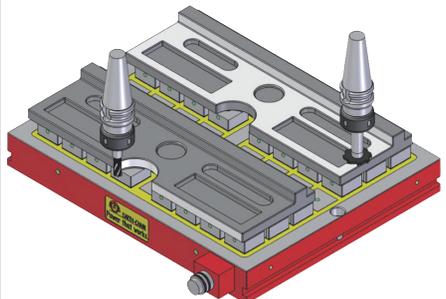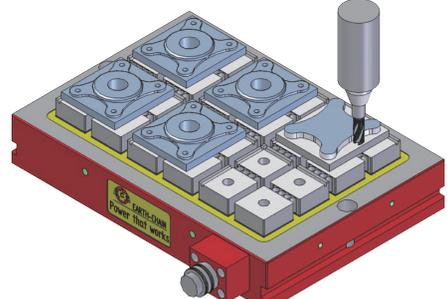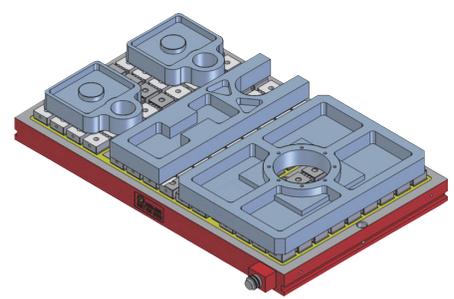		
<p>Using height 25mm Induction block for multi-workpiece on 5 sides machining.</p>		




**Option Accessories**

**Induction Block EEPM-IBT Series**

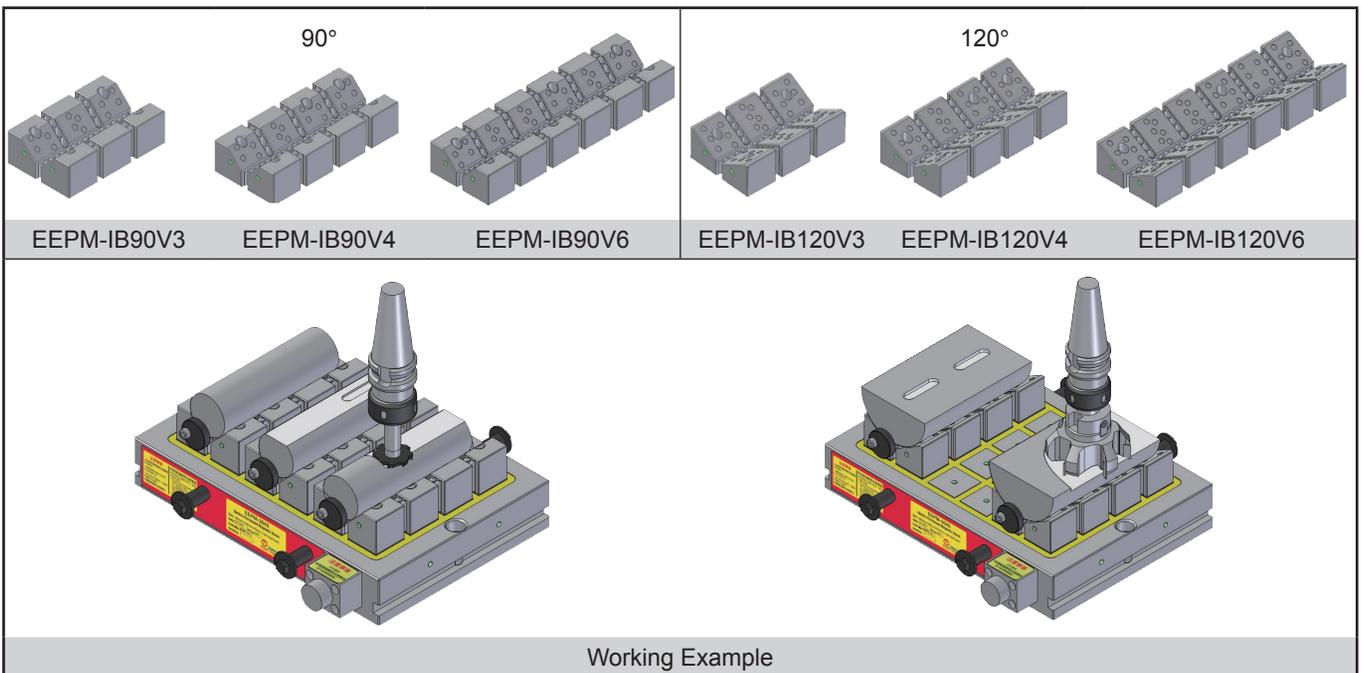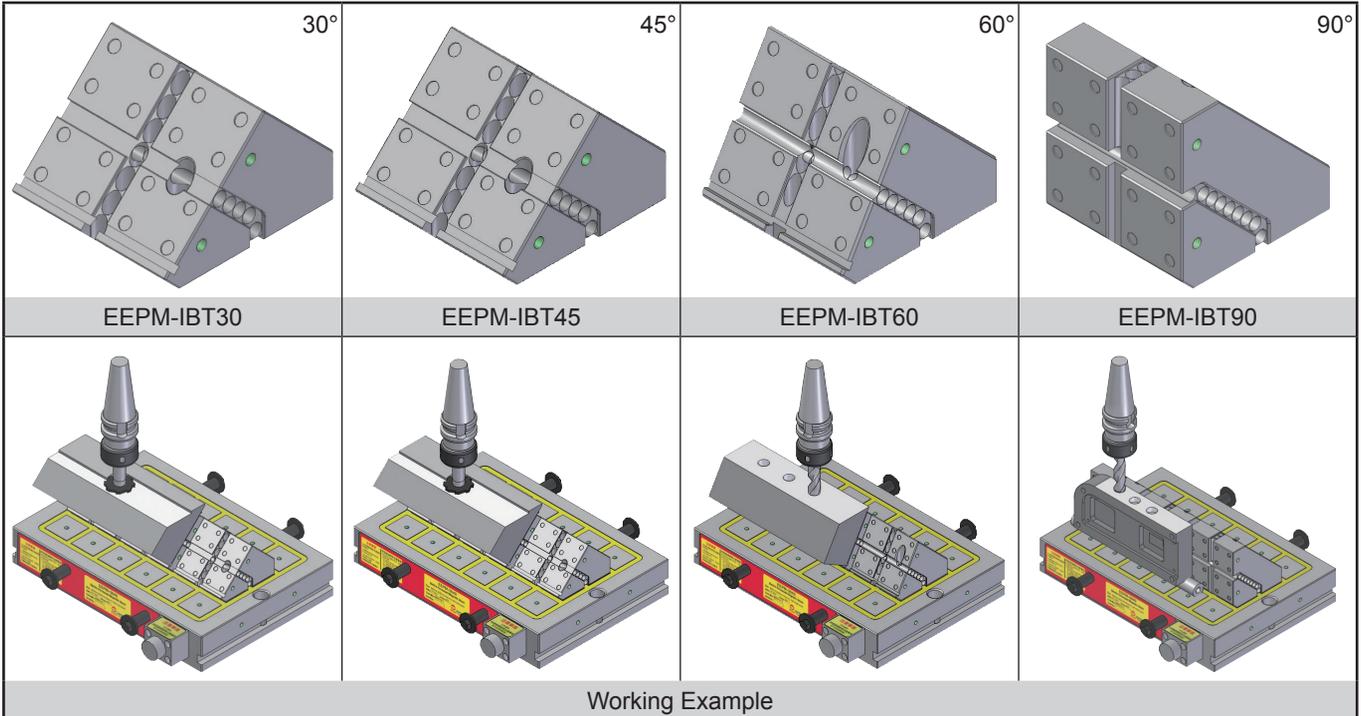

**Stopping Plate EEPM-PS40**

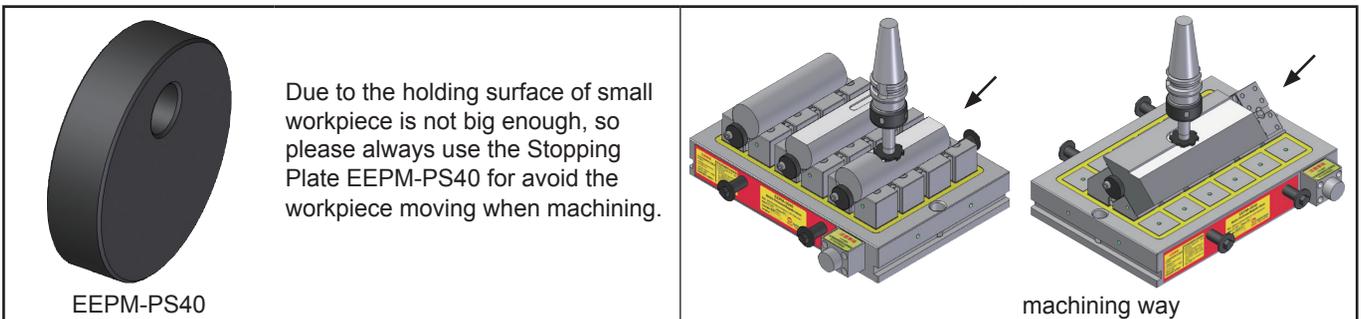



# Mag Vise

## Option Accessories

**Magnetic Workholding** ■ Suitable for use on EEPM Series of Electro-Permanent Magnetic Chuck.

### Spring Block EEPM-SP Series

■ Suitable for clamping on iron cast, irregular form and flexuous workpieces, it will not be out of shape the workpiece after machining.



Spring Block  
EEP-SP Series



Fixed Block  
EEP-SPF Series


#### Features:

1. Suitable for clamping on iron cast, irregular form and flexuous workpieces, it will not be out of shape of the workpiece after machining.
2. 3 Fixed Blocks is necessary for each workpiece clamping, it could be makes a basic surface for the workpiece touch to the Spring Blocks.
3. Elasticity: Each 2.5 mm for up and down.

MODEL NO.	L	W	H	SUITABLE
EEP-SP35	35	33.6	21	EEP-A Series
EEP-SPF35	35	35	23	EEP-A Series


MODEL NO.	L	W	H	SUITABLE
EEP-SP	48	48	30	EEP-B Series
EEP-SPF	50	50	32.5	EEP-B Series

MODEL NO.	L	W	H	SUITABLE
EEP-SP70	68	68	30	EEP-D Series
EEP-SPF70	70	70	32.5	EEP-D Series

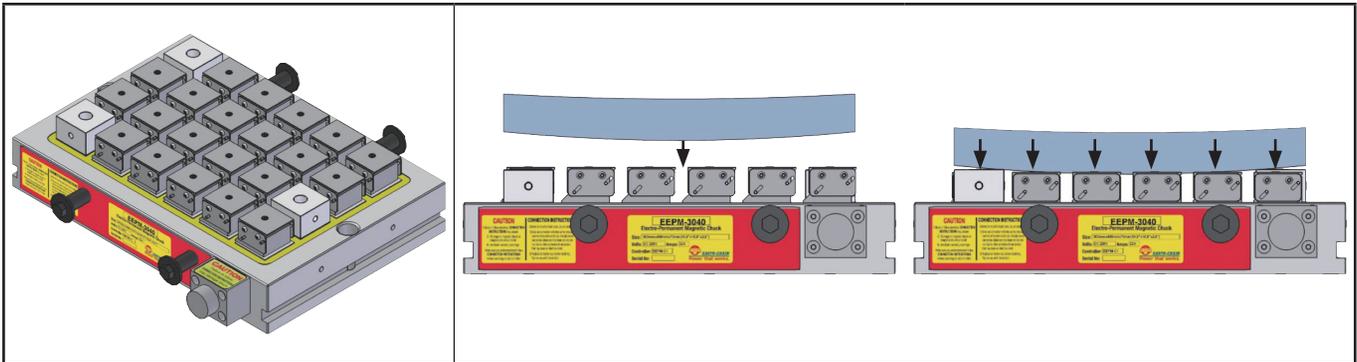


### Induction Sub Plate EEPM-ISP Series

■ Suitable for quantity of irregular and smaller workpiece. It can be machining multi-workpiece at same time easily.

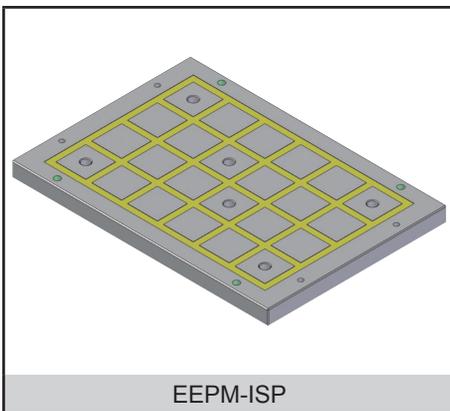

#### Features:

1. Suitable for quantity of irregular and smaller workpiece. It can be machining multi-workpiece at same time easily.
2. One EEPM chuck can be use several Induction Sub Plate exchangeability for machining different kind of workpiece.
3. Operation: Set up the Induction Sub Plates to the EEPM chucks first, then machining forms (Around 1-2mm depth) on ISP to match the workpiece by the machine directly. Start to clamp workpieces for machining.
4. Please advise the model No. of EEPM chuck which you want to combine for, when purchased.

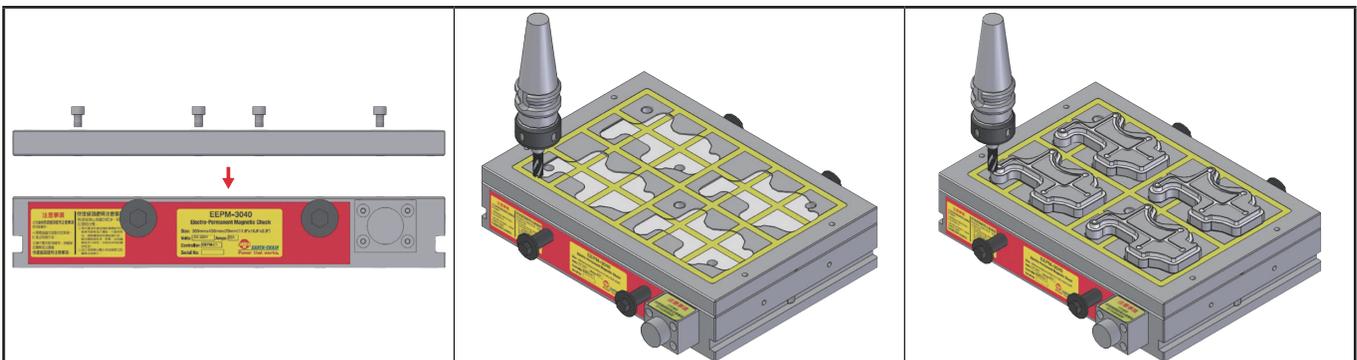



**Power that works.** ■ Suitable for use on EEPM Series of Electro-Permanent Magnetic Chuck.


### Induction block with raise pin structure (EEPM-S50T)

■ Suitable for high-carbon steel workpiece



**Features:**


1. Since the high-carbon materials, the workpiece might be unable to be instantly released after machining cycle is completed due to residual magnetism.
2. The high-carbon steel parts are difficult to remove after the magnetization using induction block with raise pin structure can easily remove the workpiece.

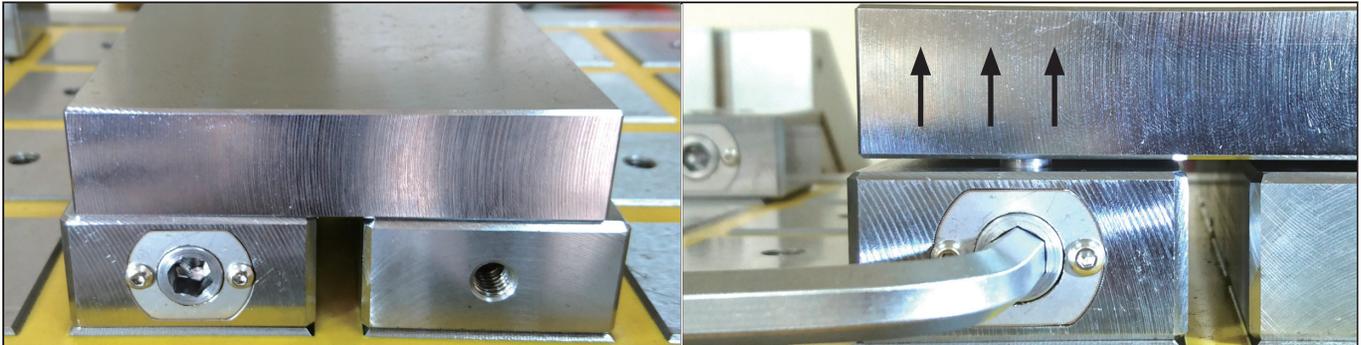

### Tap of Induction block screw hole (EEPM-IBC50 Series)

**Features:**

1. Put the EEPM-IBC50 into Induction block screw hole, to avoid the iron chip fall in the induction block screw holes when machining, can be save the time for chips clear.
2. Maximum temperature is 200 degrees, if without cooling device the surface of EEPM-IBC50 will be damage by high temperature of iron chips.

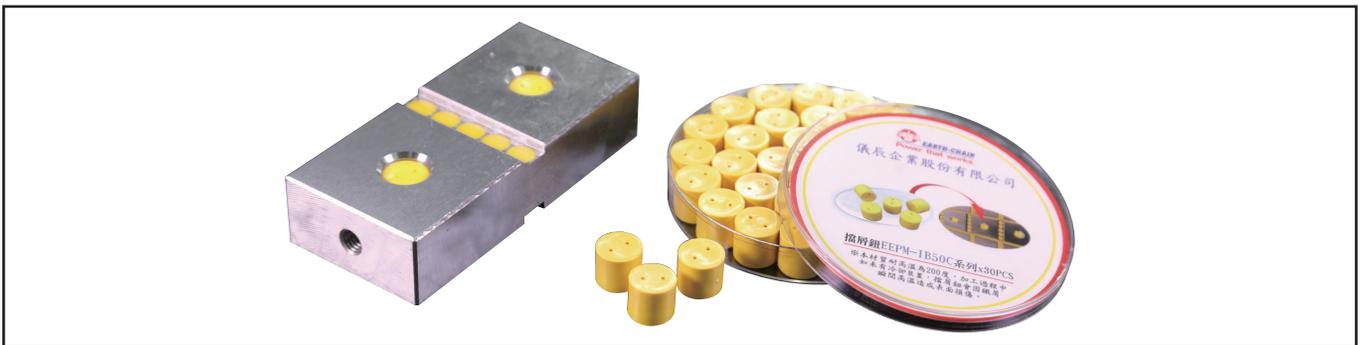


### Induction block guards: EEPM-IBS50

**Features:**

1. Put the EEPM-IBS50 into Induction block gap, to avoid the iron chip fall in the induction block gaps when machining, can be save the time for clear.
2. Maximum temperature is 200 degrees, if without cooling device the surface of EEPM-IBS50 will be damage by high temperature of iron chips.






# Mag Vise

## Electro-Permanent Magnetic Chuck EEPM Series

### Magnetic Workholding

■ Suitable for CNC Vertical machining center (Can do 5 sides machining)

#### Working Example

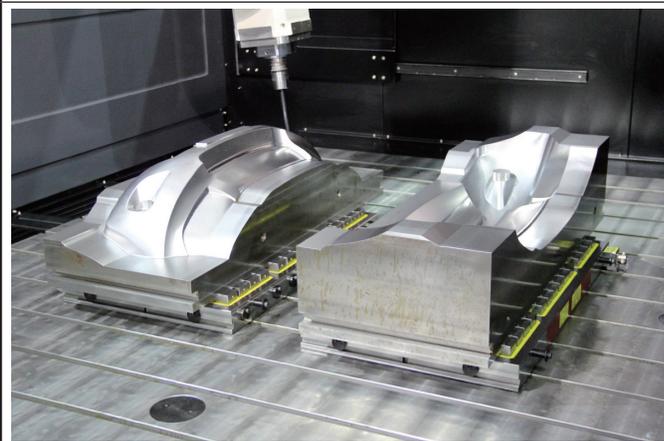



Controller


EEPm-HMI

**Features:**

- 1.HMI touch screen - can be set the screen brightness, key sound, language...etc.
- 2.Display the abnormal status, such as the chuck cable unconnected, and instruction the troubleshooting.
3. Can detect low voltage abnormal situation, to avoid the insufficient magnetic force situation.

**Example description:**

Develop Human Machine Interface touch screen system, feedback operation status from screen page, and the devices could be drive by pre-set program and parameter.

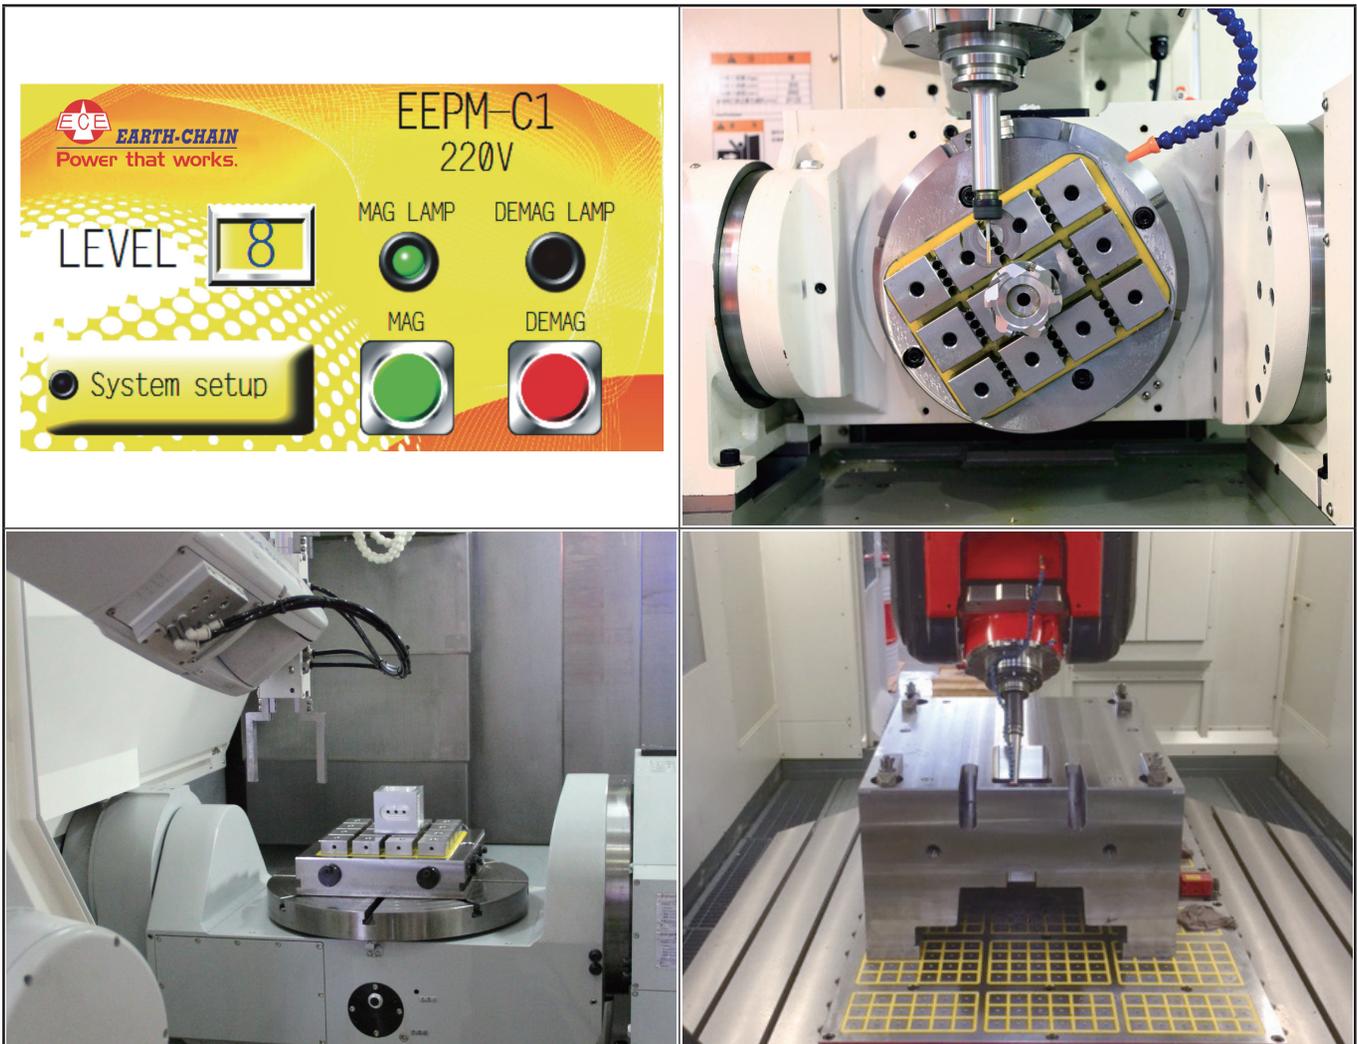



**Mag Vise**  
Magnetic Workholding

**Option Controller EEPM-C Serie**


■ Option controller available for control multi-EEPM chuck.

Please advice the voltage of EEPM chucks are AC220V or AC380V~AC440V when purchased.



<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>1 Sec</td> <td>1 Sec</td> </tr> <tr> <td>380V~440V</td> <td>1.5 Sec</td> <td>1.6 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 1 pieces of C1 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	1 Sec	1 Sec	380V~440V	1.5 Sec	1.6 Sec	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>1.4 Sec</td> <td>1.5 Sec</td> </tr> <tr> <td>380V~440V</td> <td>2.9 Sec</td> <td>3.0 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 1 pieces of C2 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	1.4 Sec	1.5 Sec	380V~440V	2.9 Sec	3.0 Sec
Voltage	Magnetizing	Demagnetizing																	
220V	1 Sec	1 Sec																	
380V~440V	1.5 Sec	1.6 Sec																	
Voltage	Magnetizing	Demagnetizing																	
220V	1.4 Sec	1.5 Sec																	
380V~440V	2.9 Sec	3.0 Sec																	
<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>2.8 Sec</td> <td>2.9 Sec</td> </tr> <tr> <td>380V~440V</td> <td>5.5 Sec</td> <td>5.8 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 2 pieces of C2 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	2.8 Sec	2.9 Sec	380V~440V	5.5 Sec	5.8 Sec	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>2.8 Sec</td> <td>2.9 Sec</td> </tr> <tr> <td>380V~440V</td> <td>5.5 Sec</td> <td>5.8 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 4 pieces of C1 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	2.8 Sec	2.9 Sec	380V~440V	5.5 Sec	5.8 Sec
Voltage	Magnetizing	Demagnetizing																	
220V	2.8 Sec	2.9 Sec																	
380V~440V	5.5 Sec	5.8 Sec																	
Voltage	Magnetizing	Demagnetizing																	
220V	2.8 Sec	2.9 Sec																	
380V~440V	5.5 Sec	5.8 Sec																	
<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>5.4 Sec</td> <td>5.7 Sec</td> </tr> <tr> <td>380V~440V</td> <td>10.9 Sec</td> <td>11.4 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 2 pieces of C4 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	5.4 Sec	5.7 Sec	380V~440V	10.9 Sec	11.4 Sec	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>5.4 Sec</td> <td>5.7 Sec</td> </tr> <tr> <td>380V~440V</td> <td>10.9 Sec</td> <td>11.4 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 4 pieces of C2 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	5.4 Sec	5.7 Sec	380V~440V	10.9 Sec	11.4 Sec
Voltage	Magnetizing	Demagnetizing																	
220V	5.4 Sec	5.7 Sec																	
380V~440V	10.9 Sec	11.4 Sec																	
Voltage	Magnetizing	Demagnetizing																	
220V	5.4 Sec	5.7 Sec																	
380V~440V	10.9 Sec	11.4 Sec																	
<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>8.1 Sec</td> <td>8.5 Sec</td> </tr> <tr> <td>380V~440V</td> <td>16.2 Sec</td> <td>17 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 3 pieces of C4 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	8.1 Sec	8.5 Sec	380V~440V	16.2 Sec	17 Sec	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Magnetizing</th> <th>Demagnetizing</th> </tr> </thead> <tbody> <tr> <td>220V</td> <td>10.8 Sec</td> <td>11.3 Sec</td> </tr> <tr> <td>380V~440V</td> <td>21.5 Sec</td> <td>22.6 Sec</td> </tr> </tbody> </table> <p>Control for 1 to 4 pieces of C4 EEPM chucks</p>	Voltage	Magnetizing	Demagnetizing	220V	10.8 Sec	11.3 Sec	380V~440V	21.5 Sec	22.6 Sec
Voltage	Magnetizing	Demagnetizing																	
220V	8.1 Sec	8.5 Sec																	
380V~440V	16.2 Sec	17 Sec																	
Voltage	Magnetizing	Demagnetizing																	
220V	10.8 Sec	11.3 Sec																	
380V~440V	21.5 Sec	22.6 Sec																	




■ Suitable for all size of workpiece, can be use together with mechanical clamping tools.

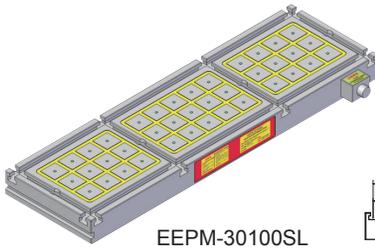


EEPM-30100SL

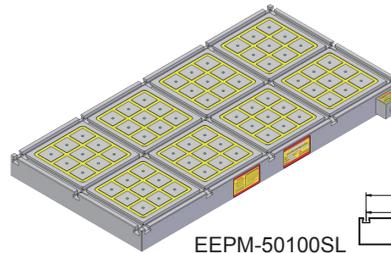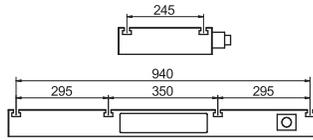



EEPM-50100SL

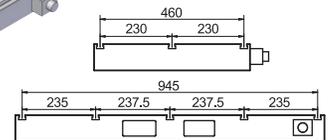


### Made with T-slots available

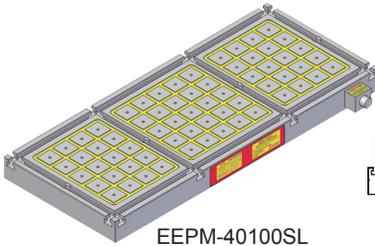

EEPM-40100SL

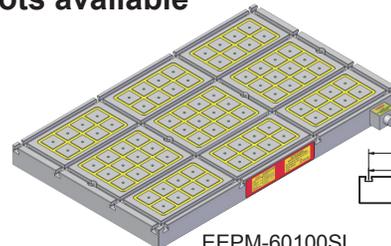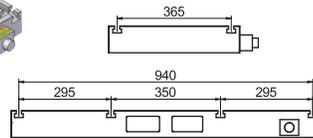


EEPM-60100SL

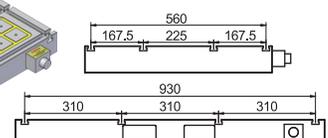


With multi-functions of machine table, clamping plate and magnetic chuck

Unit:mm



MODEL NO.	DIMENSION L×W×H	PITCH	POLE	NO. OF POLE	T-SLOT	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
EEPM-30100SL	990×300×70	10	50×50	39		12100	160kg	AC 220V	24A	C2	AC 380V 440V	16A	C2
EEPM-40100SL	990×420×70	10	50×50	65		20300	225kg		30A	C2		13A	C2
EEPM-50100SL	990×500×70	10	50×50	72		22500	260kg		14A	C4		14A	C2
EEPM-60100SL	990×600×70	10	50×50	84		26200	320kg		22A	C4		9A	C4

Custom-made is available.


■ Suitable for big size of workpiece only, use together with mechanical clamping tool for heavy duty machining.

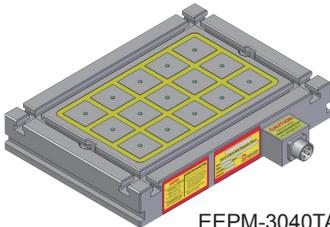


EEPM-3040TA

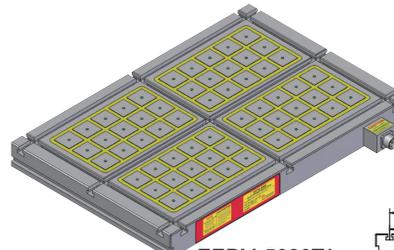



EEPM-5080TA

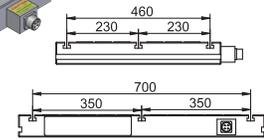


### Made with T-slots available

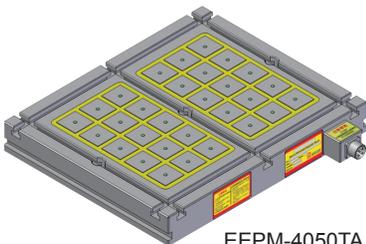

EEPM-4050TA

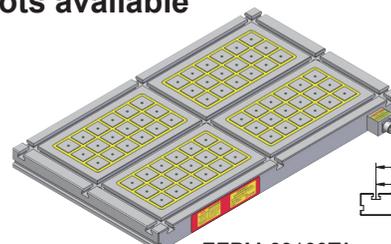


EEPM-60100TA

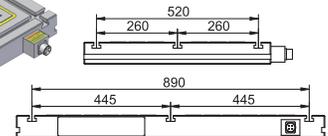

Lower price for big size of workpiece only.

Unit:mm

MODEL NO.	DIMENSION L×W×H	PITCH	POLE	NO. OF POLE	T-SLOT	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
EEPM-3040TA	420×300×70	10	50×50	15		4600	50kg	AC 220V	17A	C1	AC 380V 440V	14A	C1
EEPM-4050TA	530×440×70	10	50×50	30		9300	80kg		33A	C1		16A	C1
EEPM-5080TA	790×530×70	10	50×50	60		18700	180kg		32A	C2		14A	C2
EEPM-60100TA	990×600×70	10	50×50	72		22500	240kg		23A	C4		13A	C2


Custom-made is available.



**Mag Vise**  
Magnetic Workholding

**Electro-Permanent Magnetic Chuck EEPM-V Series**

■ Suitable for CNC horizontal machining center

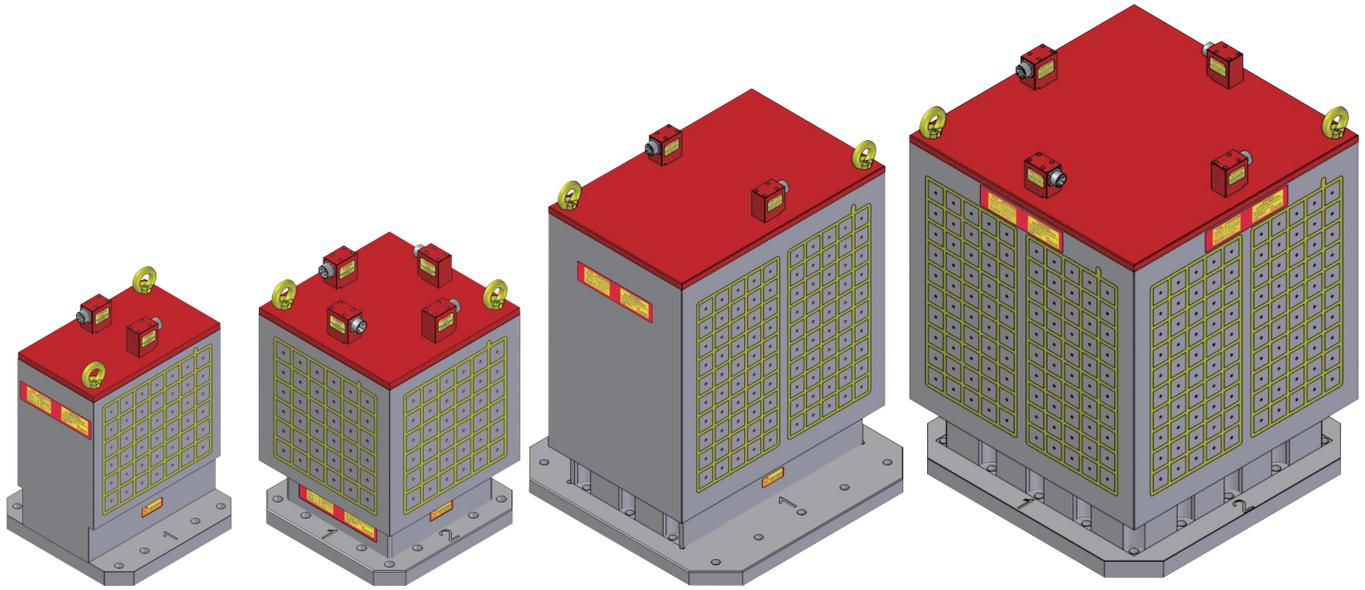


EEPM-500V2

EEPM-500V4

EEPM-800V2

EEPM-800V4

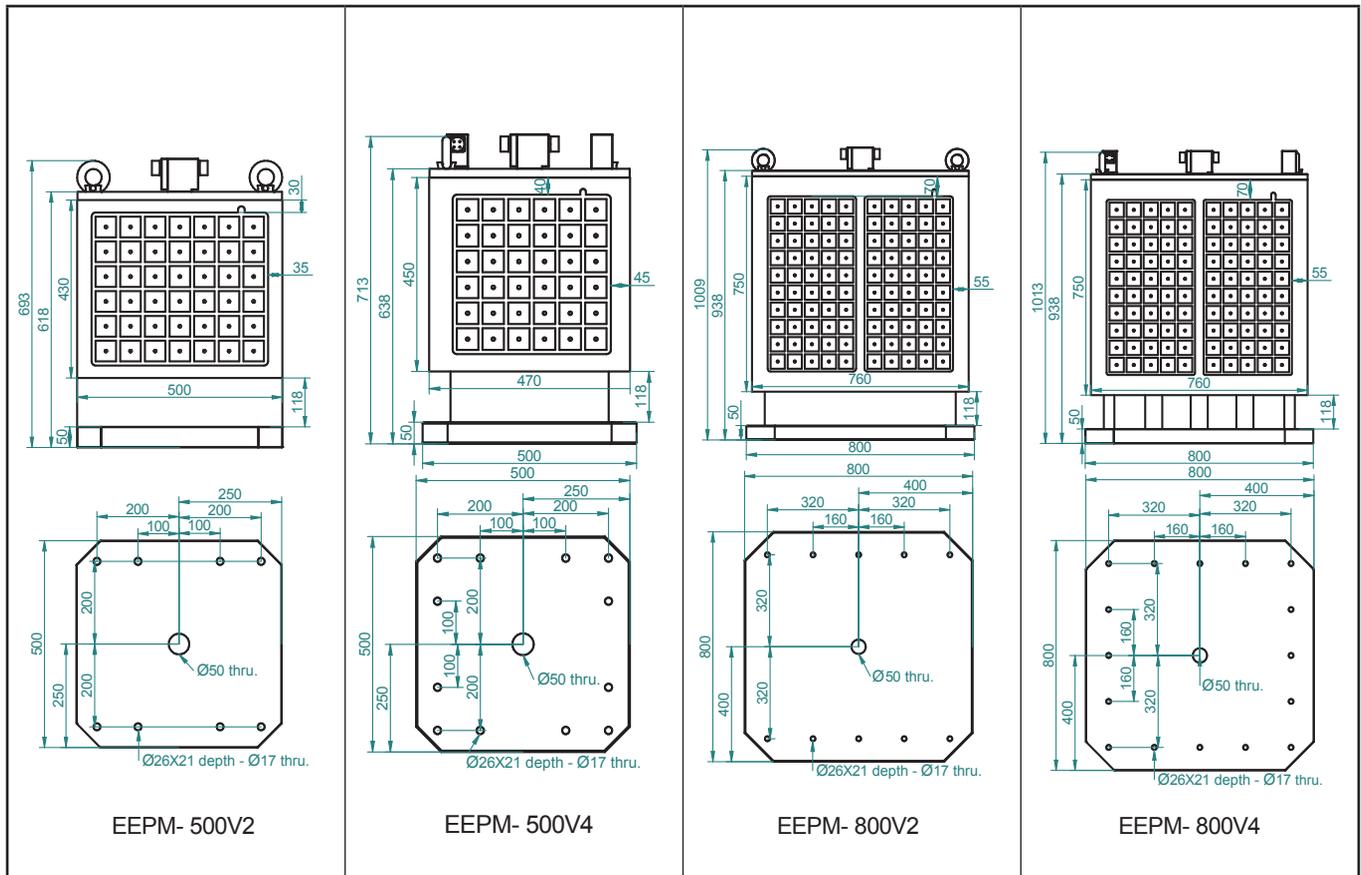

EEPM- 500V2

EEPM- 500V4

EEPM- 800V2

EEPM- 800V4

Unit:mm

MODEL NO.	DIMENSION	PITCH	POLE	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
EEPM-500V2	430×500	10	50×50	42×2	13100	480kg	AC 220V	30A	C2	AC 380V	14A	C2
EEPM-500V4	450×470	10	50×50	36×4	11200	510kg		20A	C2		13A	C1
EEPM-800V2	750×760	10	50×50	100×2	31200	760kg		22A	C4	440V	10A	C4
EEPM-800V4	750×760	10	50×50	100×4	31200	810kg		22A	C4		10A	C4

Custom-made is available.




**Features:**

1. Super power magnetic force 1250kgf/100cm<sup>2</sup> ±5%. (4 Poles)
2. Control each working face for ON and OFF, so it can be load and unload the workpiece on each working face. 3~10 seconds control for power ON and OFF.
3. Each EEPM-V type can be clamp multi-workpiece machining, instead of multi-pallet exchange.
4. Can do 5 sides machining, un-obstructed movement of cutters during machining.  
One cycle to finish a workpiece, helps in achieving best machining accuracy and increases efficiency a lot.

**Applications:**

1. Suitable for CNC horizontal machining center.
2. EEPM-V2 with 2 working faces suitable for bigger workpiece.  
EEPm-V4 with 4 working faces suitable for medium workpiece.
3. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

**Working Example**

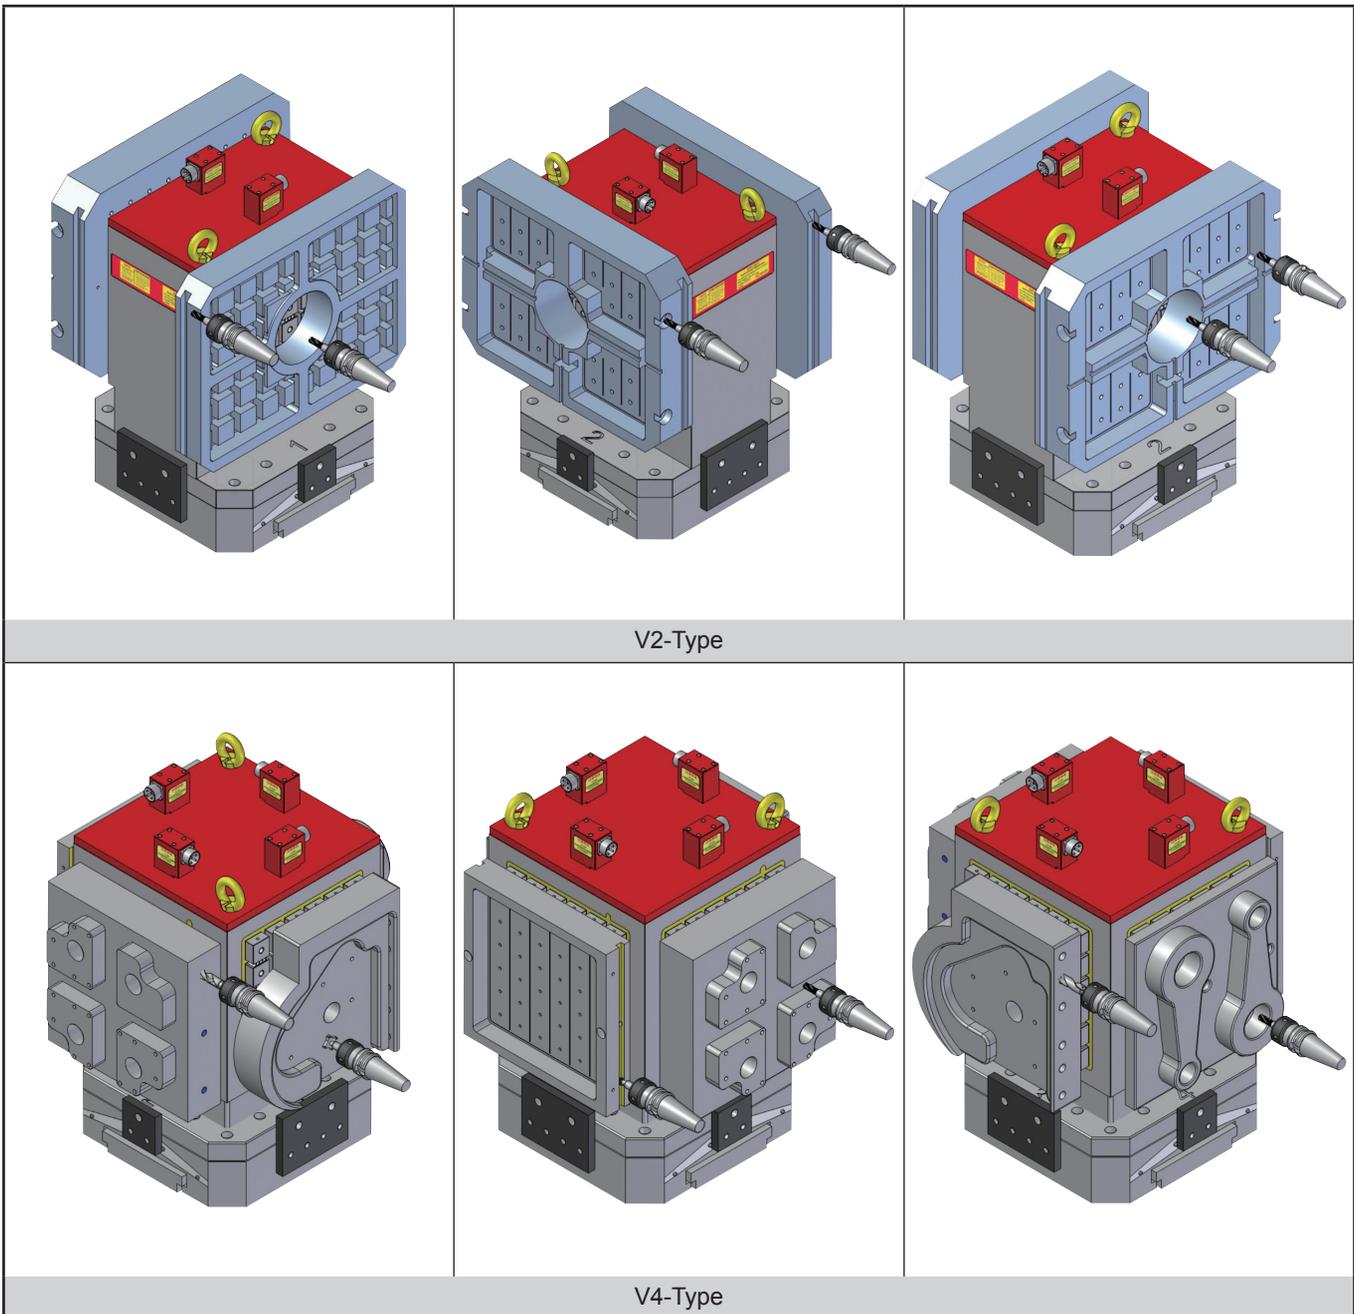



# Mag Vise Magnetic Workholding

## Electro-Permanent Magnetic Index Table EEPM-IT Series

■ Suitable for horizontal milling & boring machine on precision machining of division.



Traditional Milling Machine can do 5 sides machining too.  
PATENT NO.350429

### Features:

1. We changed traditional clamping way of Index Table. Made with Electro-Permanent Magnetic Chuck, can do 5 side machining, without any obstructed movement of cutters during machining.
2. Super magnetic force 1250kgf/100cm<sup>2</sup> ±5%.
3. Structure of Electro-Permanent Magnetic Chuck, 3~10 seconds control for power ON & OFF. No electric power supply required to keep the chuck ON. So no electric cable disturbed, can be turning freely.
4. Magnetic power adjustable.
5. Pneumatic system to rotate and fix the table, Easy and convenient to operate.
6. Heavy Duty construction, built of FC35 cast iron. Suitable for heavy duty machining.

### Applications:

1. Suitable for horizontal milling, boring machine on precision machining of division.
2. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

Unit:mm


MODEL NO.	EEPM-300IT	EEPM-470IT	EEPM-600IT	EEPM-800IT
L X W	300×300	470×470	600×600	800×800
HEIGHT	193	187	226	302
DRIVING	FLOATATION	Air Pressure 5~8 kg/cm <sup>2</sup>		
	REVOLVING	Manual		
MAX. LOAD WEIGHT VERTICAL IN THEORY	1200kg	2400kg	3400kg	4500kg
ALLOWABLE LOAD WEIGHT	500kg	1000kg	2000kg	3000kg
TABLE ROTATION	Clockwise & anticlockwise			
DIVISION	Standard 24T~15° Option 72T~5°	Standard 72T~5° / Option 360T~1°		
NET WEIGHT	104kg	223kg	453kg	983kg
DIMENTION OF POLE	50×50			
NO. OF POLE	16	48	72	144
TOTAL HOLDING POWER kgf ±5%	5000	15000	22500	45000
VOLTAGE (Single Phase)	AC 220V			
CURRENT (AMP)	15A	23A	23A	18A
CONTROLLER (included)	C1	C2	C4	C8
VOLTAGE (Single Phase)	AC 380V~440V			
CURRENT (AMP)	13A	10A	18A	18A
CONTROLLER (included)	C1	C2	C2	C4



單位：mm

MODEL NO.		EEPM-300IT	EEPM-470IT	EEPM-600IT	EEPM-800IT
SQUARENESS OF TABLE		0.01	0.015	0.02	0.02
REPEAT ROTATION		0.01	0.01	0.015	0.015
PARALLELISM OF TABLE		0.01	0.015	0.02	0.02
BASIC SIDE SQUARENESS		0.015	0.015	0.02	0.02
DIVISION (SECOND)	DIVIDING 4				±2"
	DIVIDING 72				±3"

**Working Example**

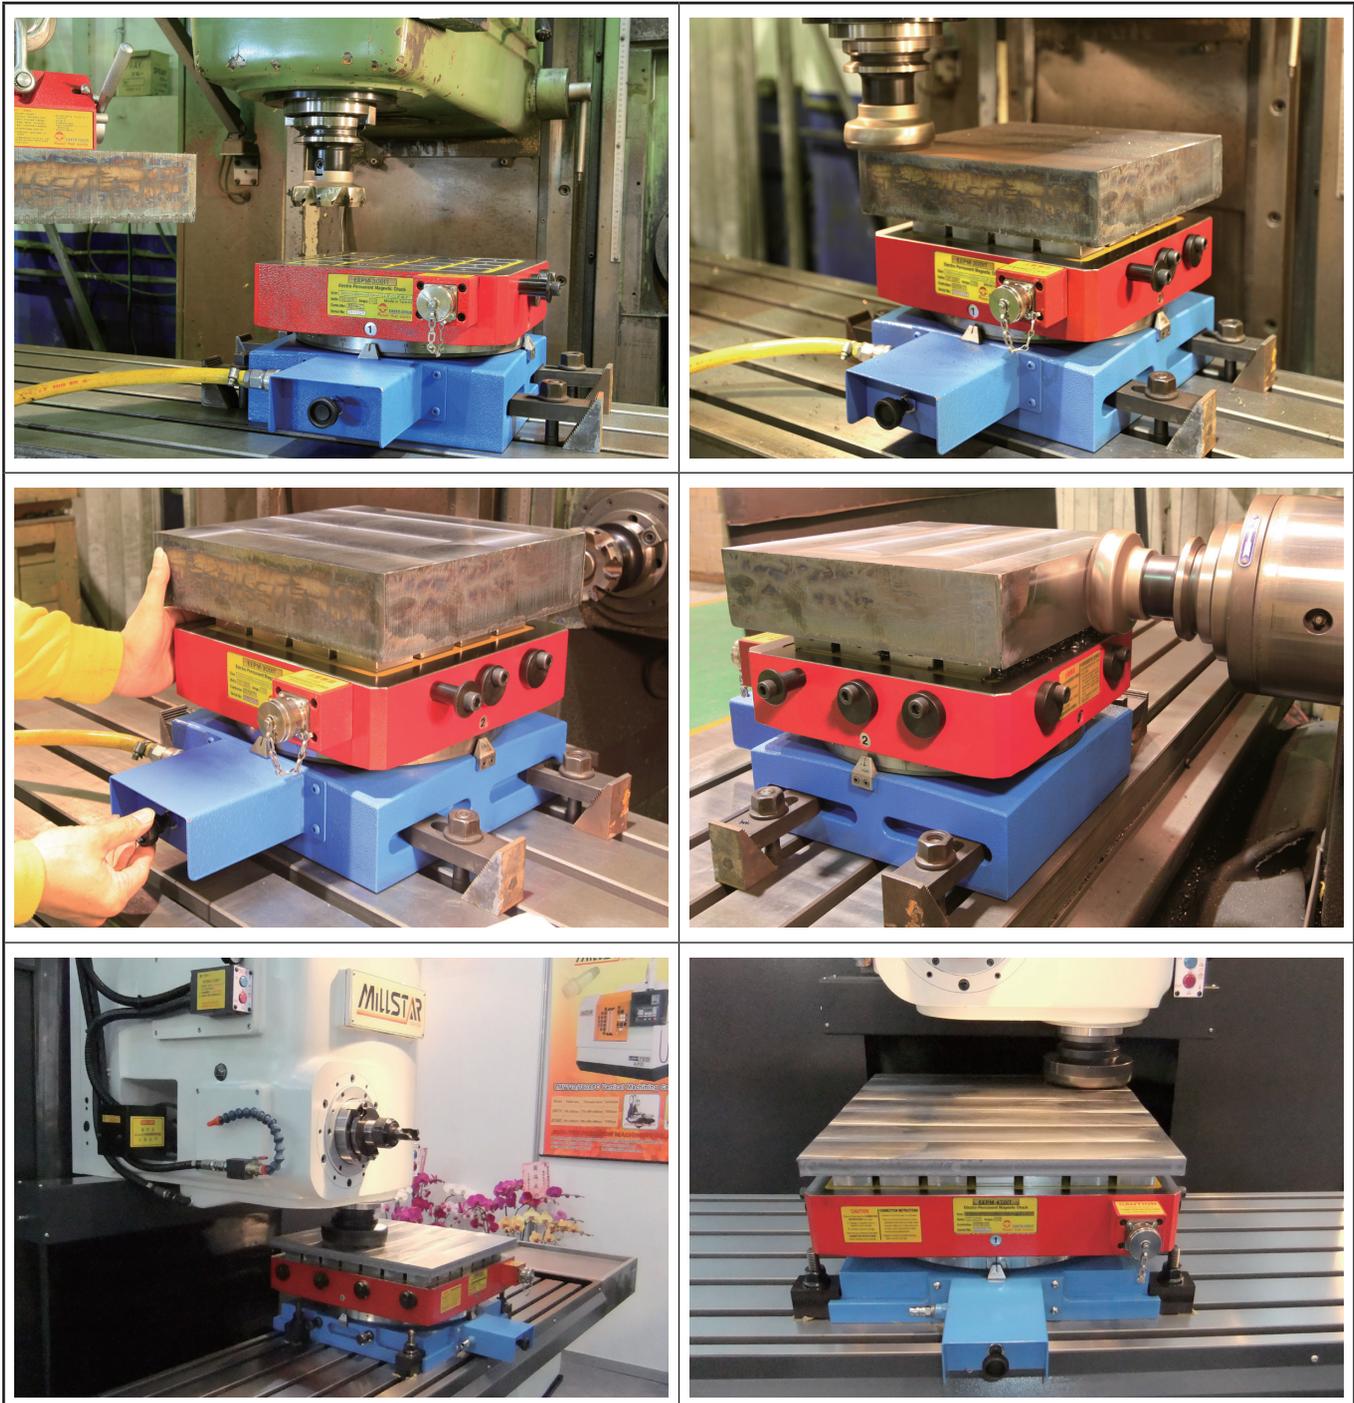




**Mag Vise**  
Magnetic Workholding

**Electro-Permanent Magnetic Chuck EEPM-CIT Series**

■ Suitable in use for combine with CNC 4 Axis Index Device

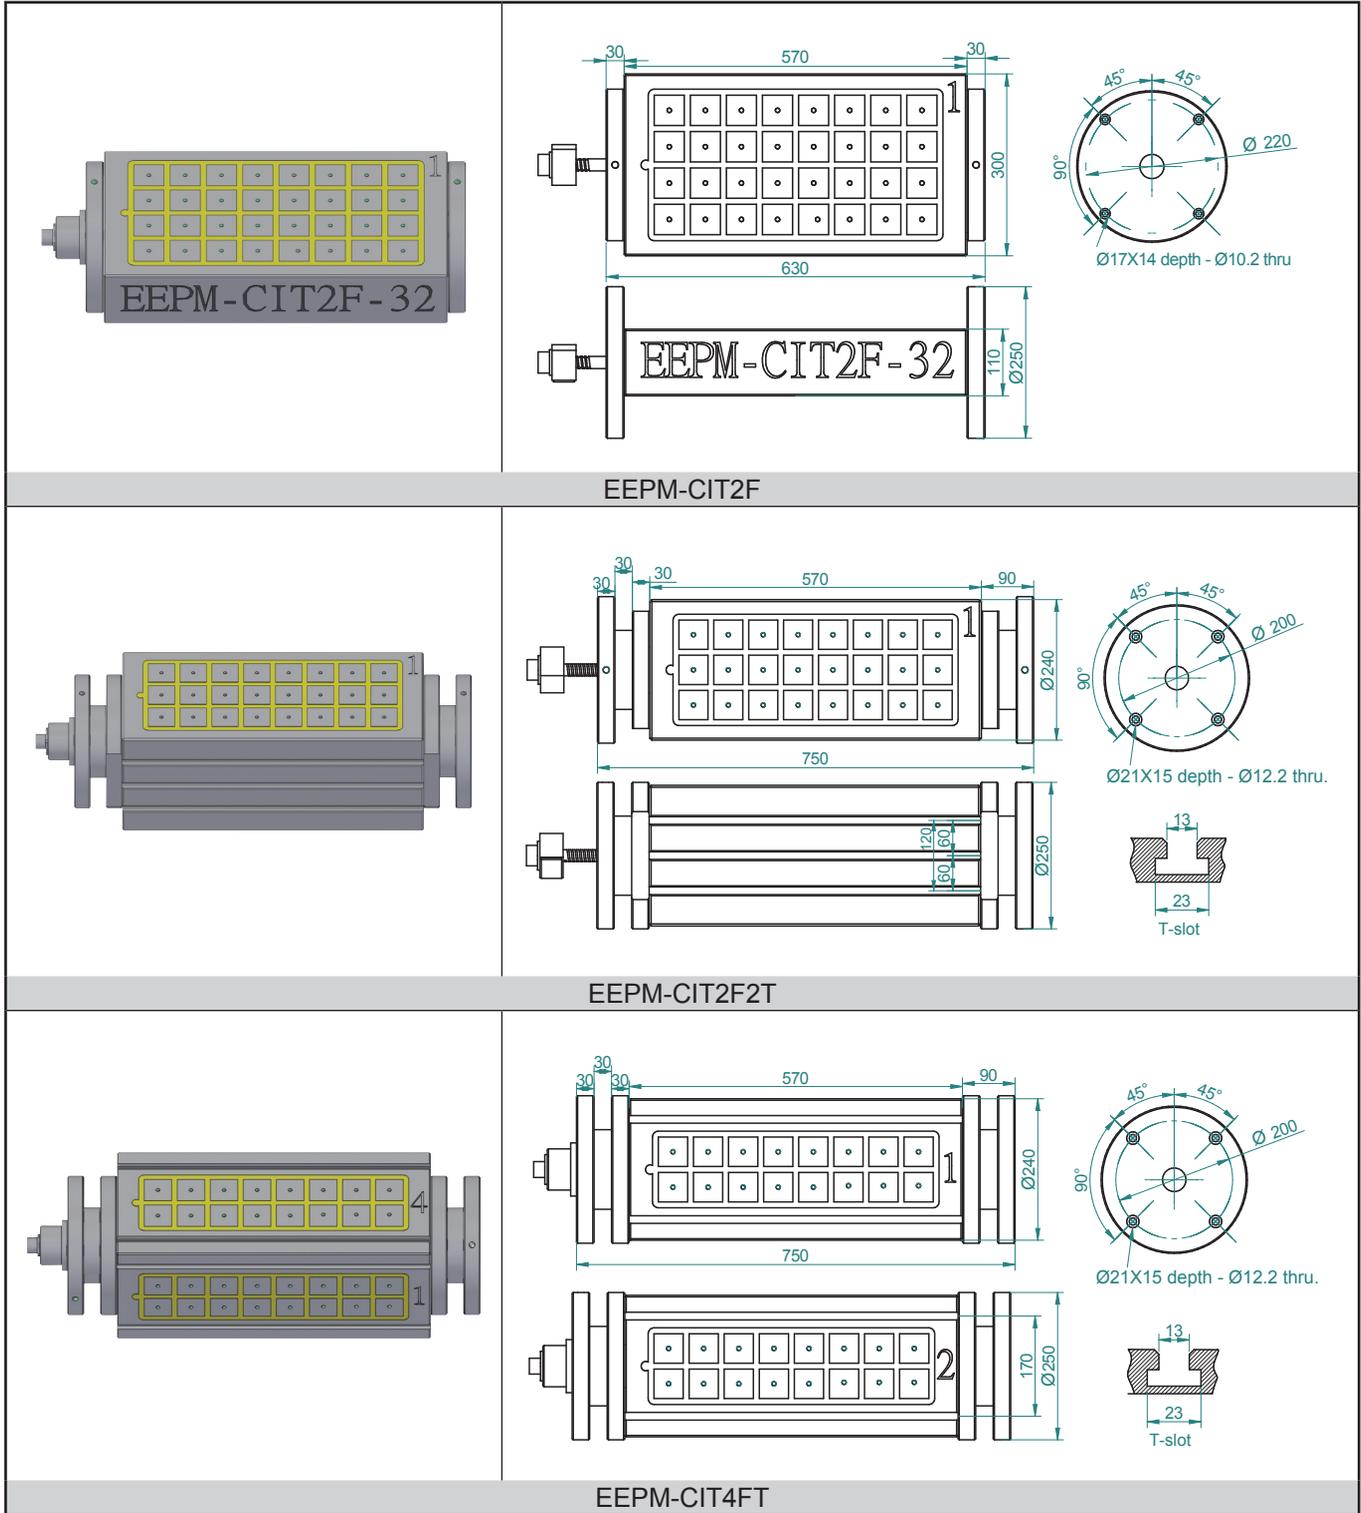

Unit:mm

MODEL NO.	DIMENSION	PITCH	POLE	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
EEPM-CIT2F	300×570	10	50×50	32×2	10000	141kg	AC 220V	30A	C2	AC	30A	C2
EEPM-CIT2F2T	240×570	10	50×50	24×2	7500	228kg		23A	C2	380V	18A	C2
EEPM-CIT4FT	240×570	10	50×50	16×4	5000	219kg		20A	C4	440V	18A	C4

Custom-made is available.




**Features:**


1. Super power magnetic force 1250kgf/100cm<sup>2</sup> ±5%. (4 Poles)
2. Control each working face for ON and OFF, so it can be load and unload the workpiece on each working face. 3 seconds control for power ON and OFF.
3. EEPM-CIT2F with 2 magnetic working face, can be clamp 2 workpiece for machining. Suitable for bigger workpiece machining.
4. EEPM-CIT2F2T with 2 magnetic working face and 2 T-slot working face, can be clamp both of magnetic and non-magnetic material of workpiece machining. Suitable for smaller workpiece machining.
5. EEPM-CIT4FT with 4 magnetic working face and T-slots available. Suitable for smaller workpiece machining.
6. Without any obstructed movement of cutters during machining. Can be use all the functions of CNC 4 Axis Index Device completely.

**Applications:**

1. Suitable in use for combine with CNC 4 Axis Index Device.
2. Minimum size of workpiece required as 4 alternate magnetic square poles and above is necessary for optimum clamping.

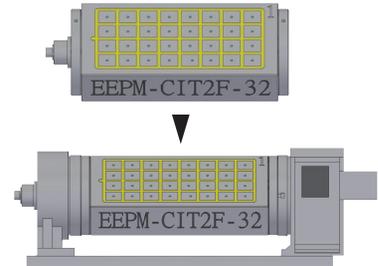

**Working Example**

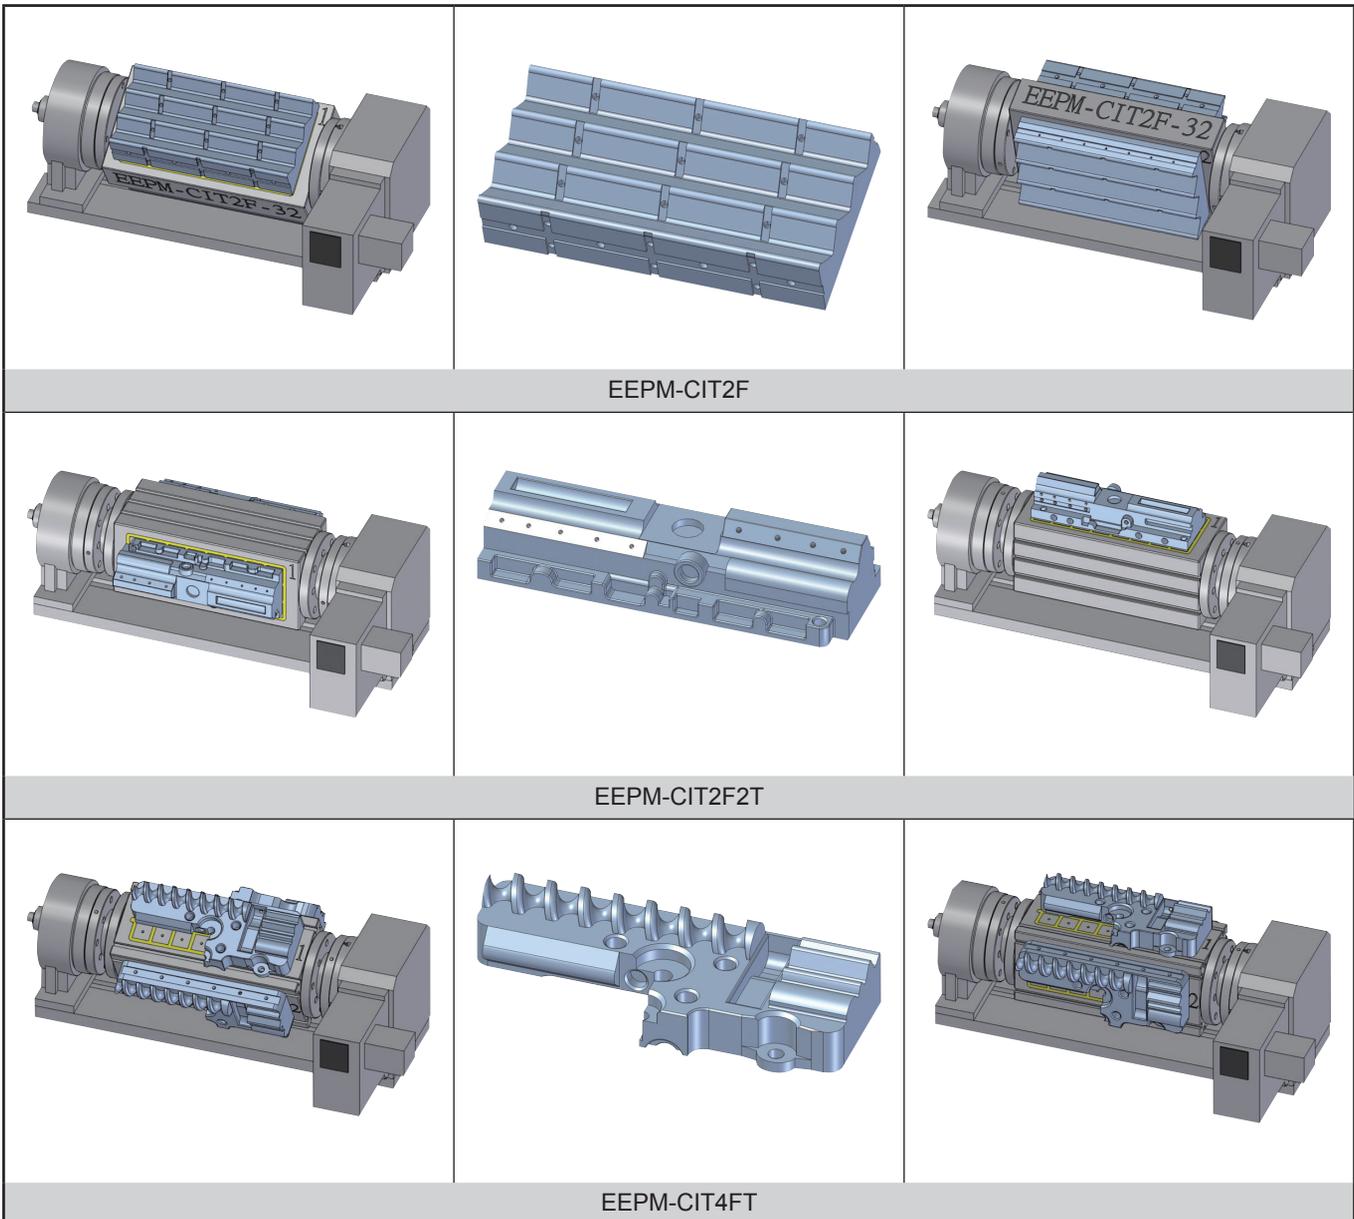





**Mag Vise**  
Magnetic Workholding

**Electro-Permanent Magnetic Chuck EEPM-CIR Series**


■ Suitable for use on Vertical Lathe, CNC 5 Axis Machining Center ...etc.

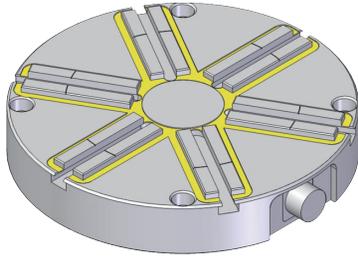




EEPM-CIR300A

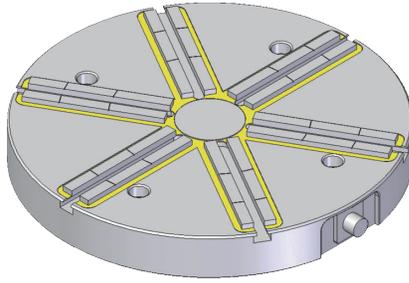

EEPM-CIR400A

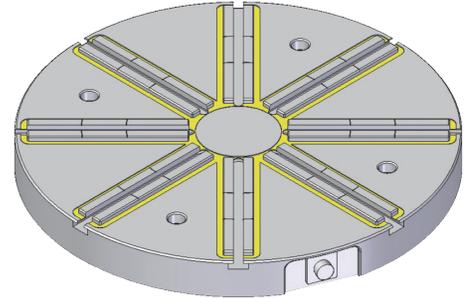

EEPM-CIR500A

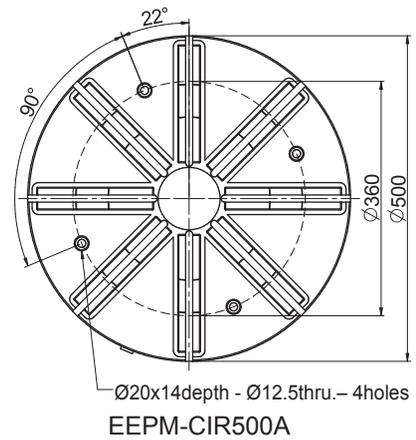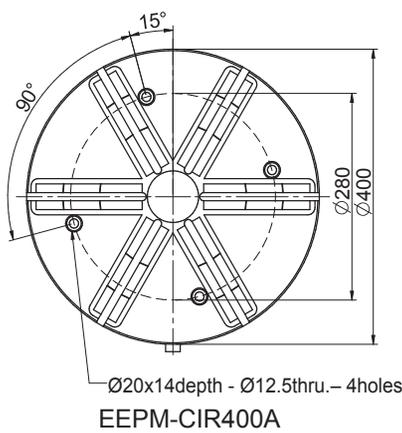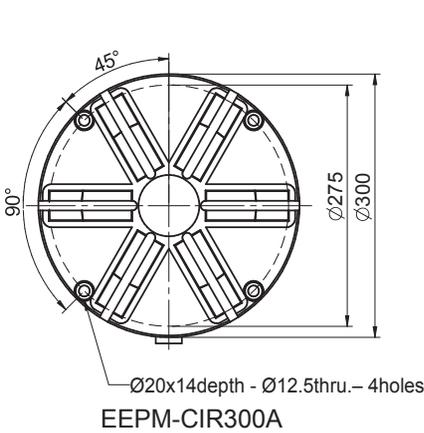

**Features:**

1. Round type and radiate magnetic poles, suitable for clamping round type and any form of workpiece machining.
2. Workpieces can be touch to all poles of Magnetic Chuck, super power magnetic force as minimum of 300Kgf (0.30tons) ±5% and maximum of 2375Kgf (2.38 tons)±5%, it depends on size of workpiece and magnetic chuck. (Please refer to the spec. list)
3. 1 ~ 10 seconds control for power ON & OFF. No electric power supply required to keep the magnetic chuck ON, cable can be taken off for turning chuck freely while machining.
4. Un-obstructed movement of cutters during machining, the really functions of 5 side machining on workholding.
5. Design of Electric-Permanent, never gets temperature to effect the accuracy of workpieces.

**Applications:**


1. Suitable in use for combine with Vertical Lathe, CNC 5 Axis Index Device, CNC 5 Axis Machining Center ...etc.
2. Minimum dimension of workpiece required as:  
EEPM-CIR300- φ 300mm; EEPM-CIR400- φ 360mm; EEPM-CIR 500- φ 500mm  
or same dimensions of any other forms of workpiece.
3. More functions for cooperate with induction plate, can do positioning on workholding.

Panted Patent No:M358689


Unit:mm

MODEL NO.	DIMENSION			NO. OF POLE	T-slot	MAGNETIC FORCE	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	OD	ID	HEIGHT							
EEPM-CIR300A	φ 300	0	55	6		1600kgf±5%	30kg	AC	7A	C1
EEPM-CIR400A	φ 400	0	55	6		2480kgf±5%	55kg	220V	18A	C1
EEPM-CIR500A	φ 500	0	55	8		4400kgf±5%	85kg	440V	22A	C1


Custom-made is available.

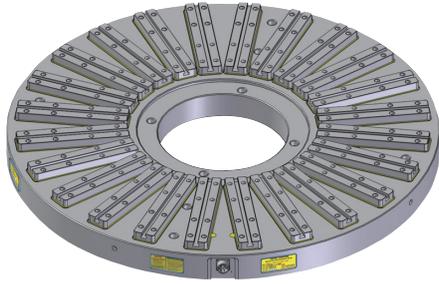


EEPM-CIR1250

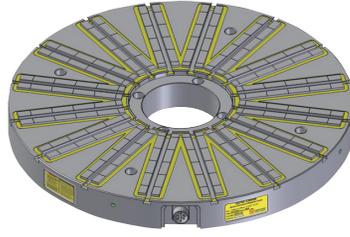


EEPM-CIR800

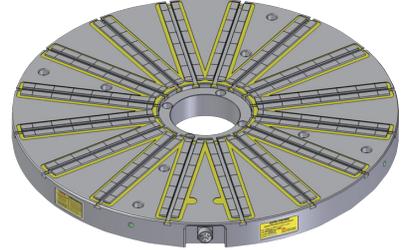


EEPM-CIR1000

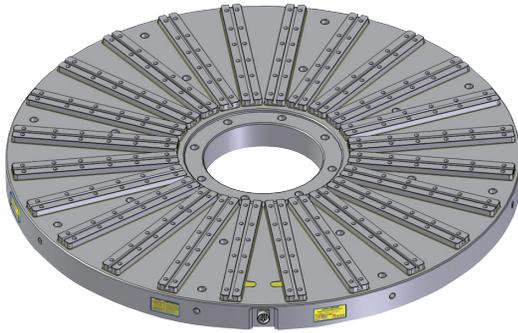


EEPM-CIR1600

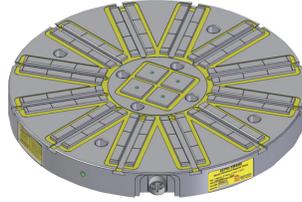


EEPM-CIR600

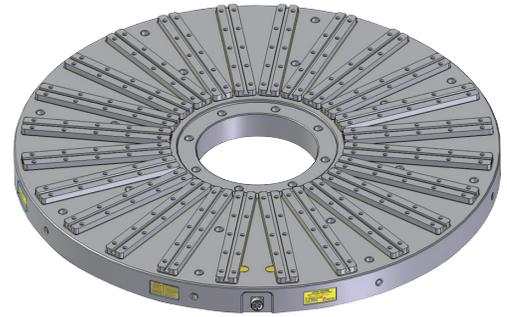


EEPM-CIR1500

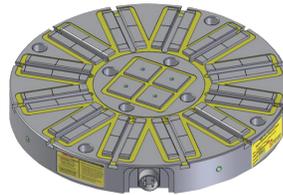

EEPM-CIR500

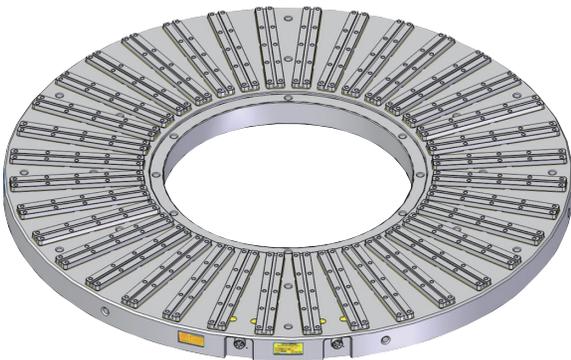


EEPM-CIR2000

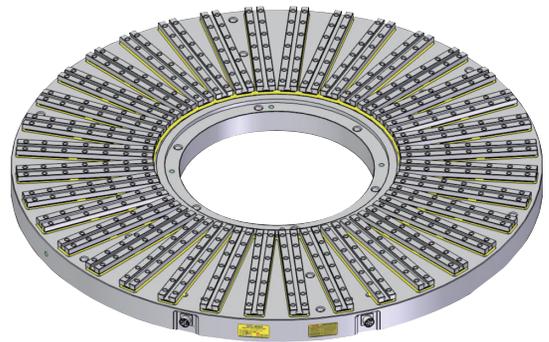

EEPM-CIR1800

Panted Patent No:M358689

Unit:mm

MODEL NO.	DIMENSION			NO. OF POLE	T-slot	MAGNETIC FORCE	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	OD	ID	HEIGHT										
EEPM-CIR500	φ 500	0	70	12/4		6650kgf±5%	104kg	AC 220V	35A	C1	AC 380V ? 440V	15A	C1
EEPM-CIR600	φ 600	0	70	12/4		9500kgf±5%	148kg		23A	C2		15A	C2
EEPM-CIR800	φ 800	φ 250	85	16		15200kgf±5%	302kg		30A	C2		28A	C2
EEPM-CIR1000	φ 1000	φ 250	85	16		19000kgf±5%	471kg		24A	C4		20A	C4
EEPM-CIR1250	φ 1260	φ 500	110	24		28500kgf±5%	828kg		33A	C4		18A	C4
EEPM-CIR1500	φ 1520	φ 500	120	24		39900kgf±5%	1325kg		24A	C8		25A	C8
EEPM-CIR1600	φ 1630	φ 500	120	24		45600kgf±5%	1507kg		24A	C8		20A	C8
EEPM-CIR1800	φ 1820	φ 800	120	36		59850kgf±5%	2290kg		33A	C8		28A	C8
EEPM-CIR2000	φ 2050	φ 1000	130	36		59850kgf±5%	2490kg		33A	C8		28A	C8
EEPM-CIR2600													
EEPM-CIR3000													

Custom-made is available.



**Dimension of screw holes for setting up**

<p>Ø 25x18depth - Ø16.5 thru. - 24 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 18 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 24 holes</p>
<p>EEPM-CIR1600</p>	<p>EEPM-CIR1300</p>	<p>EEPM-CIR2000</p>
<p>Ø 25x18depth - Ø16.5 thru. - 12 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 12 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 12 holes</p>
<p>EEPM-CIR1000</p>	<p>EEPM-CIR1250</p>	<p>EEPM-CIR1500</p>
<p>Ø 25x18depth - Ø16.5 thru. - 8 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 8 holes</p>	<p>Ø 25x18depth - Ø16.5 thru. - 8 holes</p>
<p>EEPM-CIR500</p>	<p>EEPM-CIR600</p>	<p>EEPM-CIR800</p>


**Features:**

1. Round type and radiate magnetic poles, suitable for clamping round type and any form of workpiece machining.
2. Workpieces can be touch to all poles of Magnetic Chuck, super power magnetic force as minimum of 1340Kgf (1.34tons) ±5% and maximum of 60,400Kgf (60 tons)±5%, it depends on size of workpiece and magnetic chuck. (Please refer to the spec. list)
3. 1~10 seconds control for power ON & OFF. No electric power supply required to keep the magnetic chuck ON, cable can be taken off for turning chuck freely while machining.
4. Un-obstructed movement of cutters during machining, the really functions of 5 side machining on workholding.
5. Design of Electric-Permanent, never gets temperature to effect the accuracy of workpieces.



**Applications:**


1. Suitable in use for combine with Vertical Lathe, CNC 5 Axis Index Device, CNC 5 Axis Machining Center ...etc.
2. Minimum dimension of workpiece required as:  
 EEPM-CIR500-  $\phi$  300mm ; EEPM-CIR600-  $\phi$  360mm  
 EEPM-CIR800-  $\phi$  500mm ; EEPM-CIR1000-  $\phi$  500mm  
 EEPM-CIR1250-  $\phi$  850mm ; EEPM-CIR1500-  $\phi$  850mm  
 EEPM-CIR1600-  $\phi$  1200mm ; EEPM-CIR1800-  $\phi$  1200mm  
 or same dimensions of any other forms of workpiece.
3. More functions for cooperate with induction plate, can do positioning on workholding.

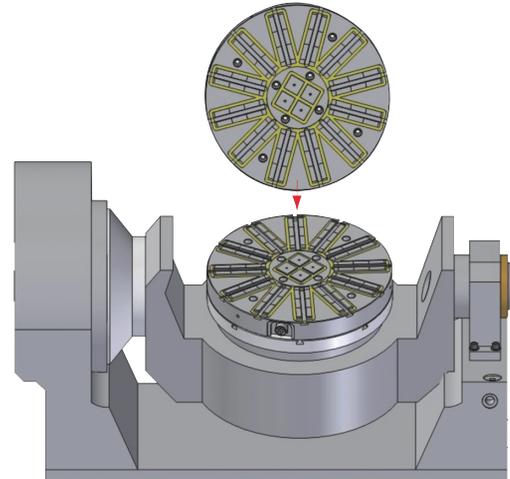

**Option Accessories-Induction Block**

**Features:**

1. Induction Block EEPM-CIRIB series are use for EEPM-CIR chucks, can do many more functions on workholding.
2. Convenience and Accuracy: Induction Block are interchanging & consuming accessories, you can machining surface or forming induction blocks for the workpiece required by the machine directly, so the parallelism of induction block will always 100% match to the machine.

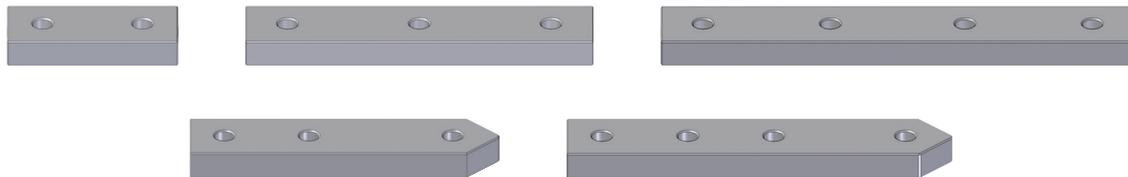


Unit:mm

Unit:mm

INDUCTION BLOCK	L	W	H	SUITABLE
EEPMM-CIRIB96A	96	35	15	EEPMM-CIR300A
EEPMM-CIRIB145A	145	35	15	EEPMM-CIR400A
EEPMM-CIRIB181A	181	35	15	EEPMM-CIR500A

INDUCTION BLOCK	L	W	H	SUITABLE
EEPMM-CIRIB120	120	50	20	EEPMM-CIR500
EEPMM-CIRIB170	170	50	20	EEPMM-CIR600
EEPMM-CIRIB245	245	50	20	EEPMM-CIR800
EEPMM-CIRIB335	335	50	20	EEPMM-CIR1000
EEPMM-CIRIB220	220	50	20	EEPMM-CIR500
EEPMM-CIRIB270	270	50	20	EEPMM-CIR600

**Working Example:** ID positioning and OD machining by Induction Block.

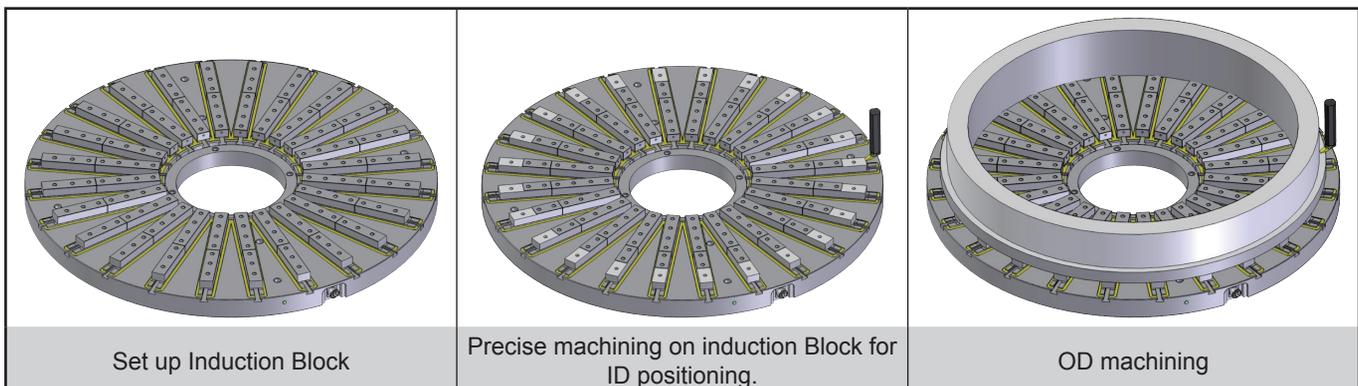




# Mag Vise Magnetic Workholding

## Electro-Permanent Magnetic Chuck EEPM-CIR Series

■ Suitable for use on Vertical Lathe, CNC 5 Axis Machining Center ...etc.

### T Fixed Slide Block




EEPM-T Series

#### Features:

1. T-fixed slide block can do base points for workpiece positioning.
2. Due to the holding surface of small workpiece is not big enough, so please always use the T fixed slide Block to avoid the workpiece moving when machining.

MODEL NO	L	W	H	SUITABLE
EEPM-15T	77	35	15	EEPM-CIRA Series
EEPM-20T	120	50	20	EEPM-CIR Series


### Working Example: Vertical Lathe machining by Induction Block with T Fixed slide Block

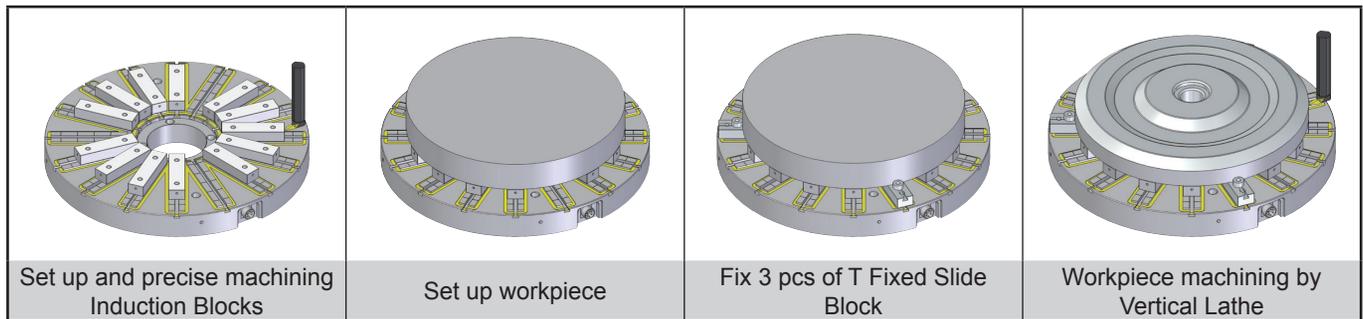

### Spring Block \ Fixed Block



Spring Block  
EEPM-SP Series



Fixed Block  
EEPM-SPF Series

#### Features:

1. Suitable for clamping on iron cast and flexuous workpieces, it will not be out of shape of the workpiece after machining.
2. 3 Fixed Blocks is necessary for each workpiece clamping, it could be makes a basic surface for the workpiece touch to the Spring Blocks.
3. Elasticity:Each 2.5 mm for up and down.


Unit:mm

MODEL NO	L	W	H	SUITABLE
EEPM-SP35	35	33.6	21	EEPM-CIRA Series
EEPM-SPF35	35	35	23	

Unit:mm

MODEL NO	L	W	H	SUITABLE
EEPM-SP	48	48	30	EEPM-CIR Series
EEPM-SPF	50	50	32.5	

### Working Example: Vertical Lathe machining by Spring Block with Fixed Block

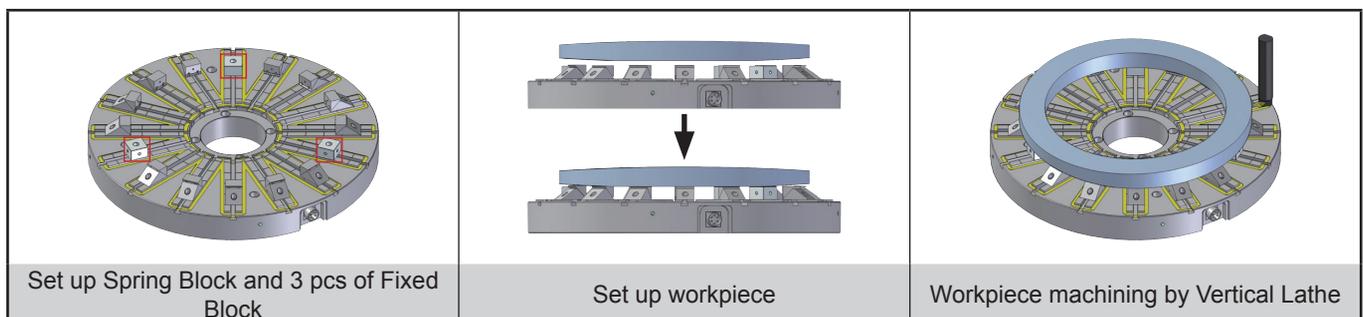



**Working Example**

<p>Round type workpiece for surface, ID and OD machining by Induction Block.</p>	<p>Irregular and thin workpiece for ID and OD machining by Spring Block.</p>
<p>Round type workpiece positioning by OD for ID machining by Induction Block.</p>	<p>Round type workpiece positioning by ID for OD machining by Induction Block.</p>
<p>Round type spiral workpiece for complex machining by Induction Block.</p>	<p>Round type spiral workpiece for complex machining by Induction Block.</p>
<p>Multi-angle workpiece for 5 sides complex machining by Induction Block.</p>	<p>Round type gear workpiece for 5 sides complex machining by Induction Block.</p>




# Mag Vise


## Magnetic Workholding

### Electro-Permanent Magnetic Chuck EEPM-CIRS Series

■ Suitable in use for combine with Rotary type Surface Grinding Machine, CNC 5 Axis Machining Center ... etc.

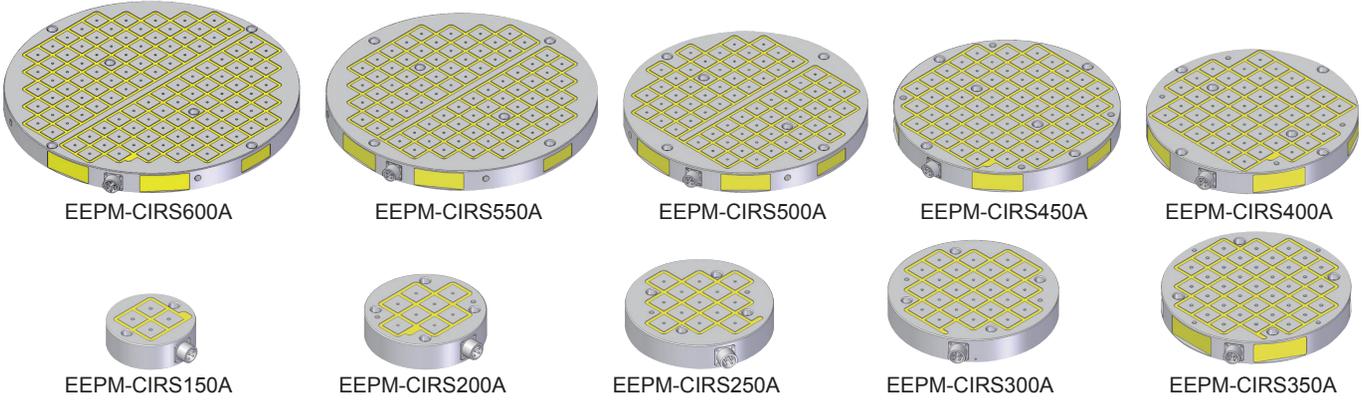


Dimension of screw holes for setting up

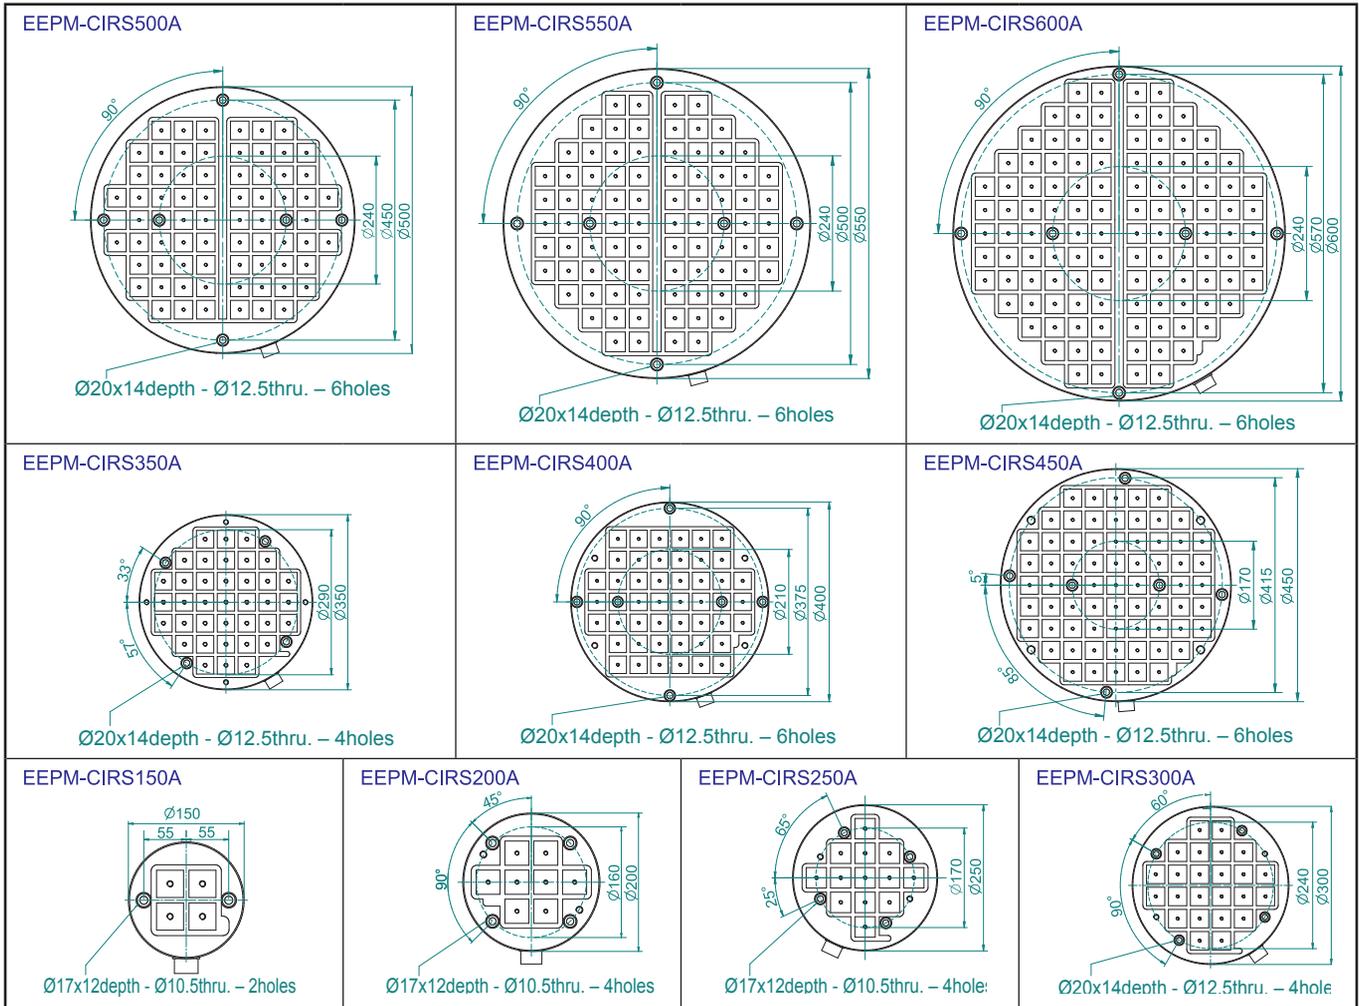


Unit:mm

MODEL NO	DIMENSION		PITCH	POLE	NO. OF POLE	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	D	HEIGHT							
EEPМ-CIRS150A	φ 150	50	7	35×35	4	6kg	AC 220V 480V	20A	C1
EEPМ-CIRS200A	φ 200	50	7		8	11kg		10A	C1
EEPМ-CIRS250A	φ 250	50	7		13	17kg		25A	C1
EEPМ-CIRS300A	φ 300	50	7		24	25kg		10A	C1
EEPМ-CIRS350A	φ 350	50	7		37	34kg		26A	C1
EEPМ-CIRS400A	φ 400	50	7		46	44kg		14A	C2
EEPМ-CIRS450A	φ 450	50	7		67	55kg		21A	C2
EEPМ-CIRS500A	φ 500	50	7		70	69kg		26A	C2
EEPМ-CIRS550A	φ 550	50	7		84	83kg		15A	C4
EEPМ-CIRS600A	φ 600	50	7		114	99kg		--	23A

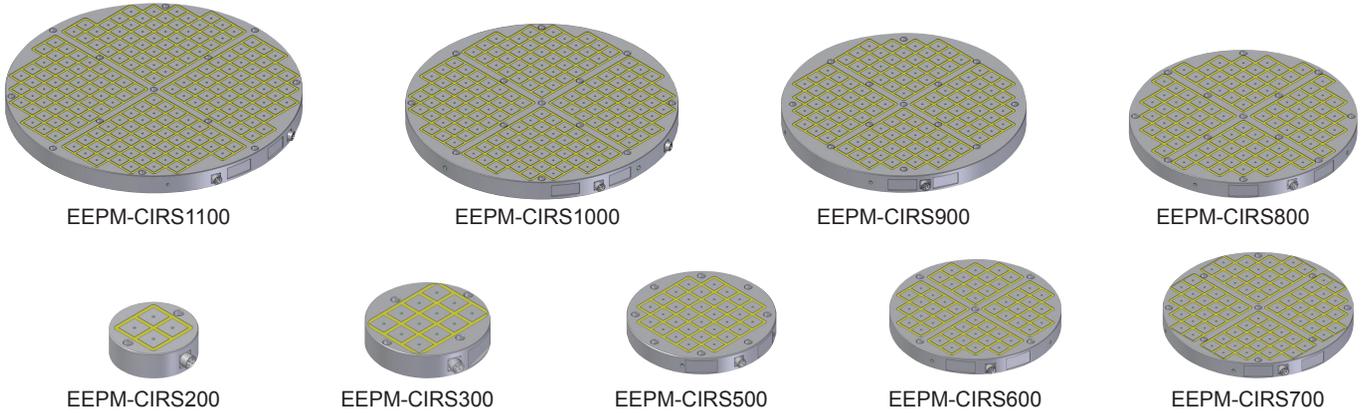

Dimension of screw holes for setting up

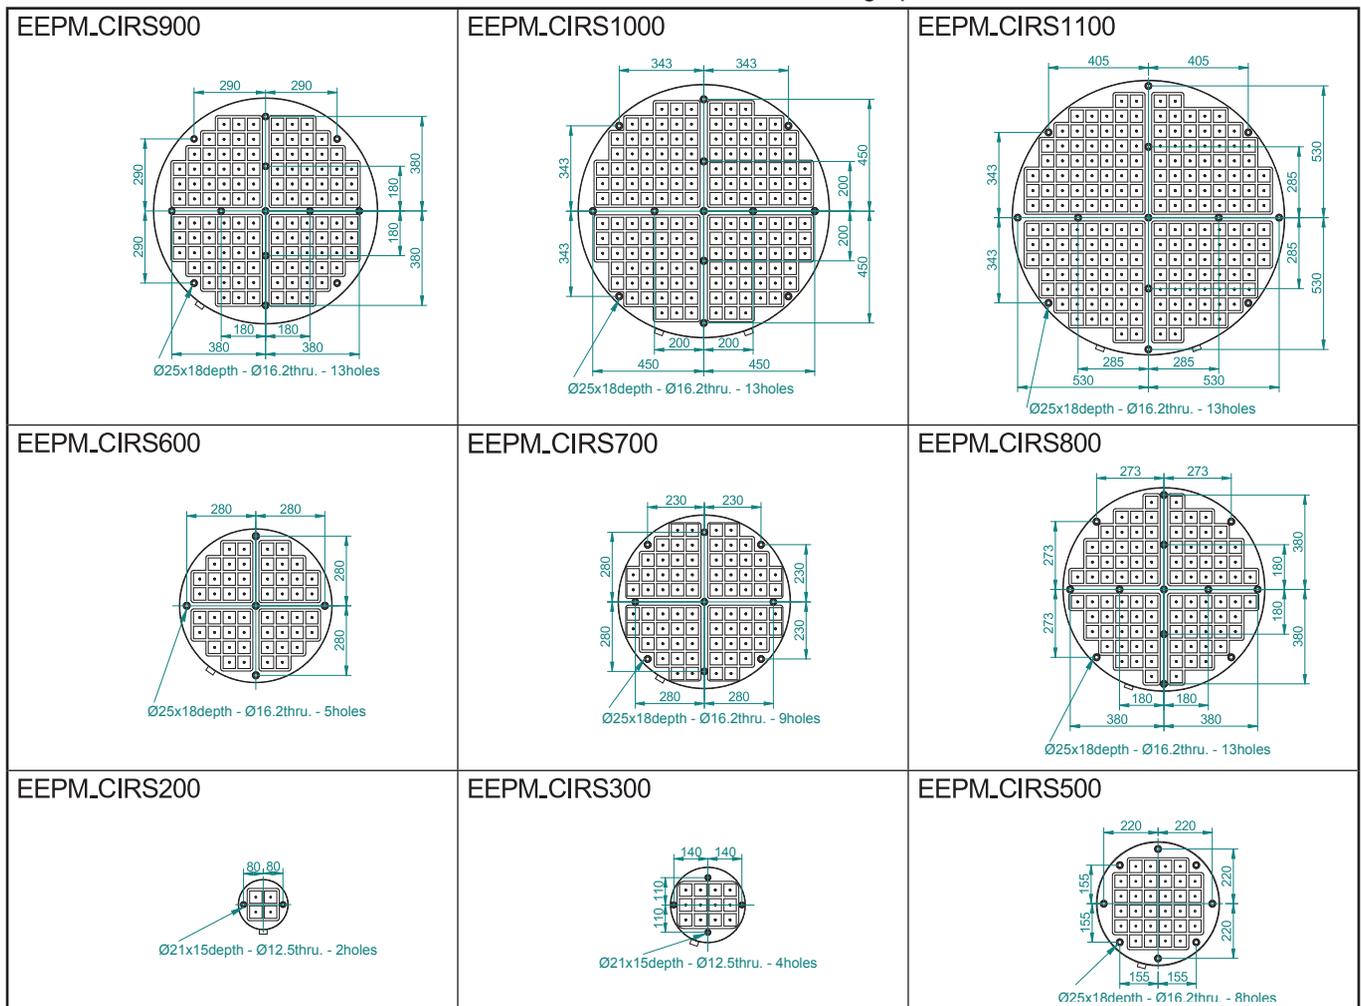

Unit:mm

MODEL NO	DIMENSION		PITCH	POLE	NO. OF POLE	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	D	HEIGHT										
EEPM-CIRS200	φ 203	70	10	50×50	4	16kg	AC 220V	15A	C1	AC 380V 440V	--	--
EEPM-CIRS300	φ 320	70	10		12	35kg		20A	C1		5A	C1
EEPM-CIRS500	φ 500	70	10		32	97kg		30A	C1		15A	C1
EEPM-CIRS600	φ 620	70	10		52	150kg		21A	C2		22A	C2
EEPM-CIRS700	φ 720	70	10		76	191kg		21A	C4		10A	C4
EEPM-CIRS800	φ 820	70	10		96	262kg		23A	C4		9A	C4
EEPM-CIRS900	φ 900	80	10		120	362kg		33A	C4		18A	C4
EEPM-CIRS1000	φ 1020	80	10		164	464kg		29A	C8		27A	C8
EEPM-CIRS1100	φ 1106	80	10		204	546kg		28A	C8		11A	C8



# Mag Vise

## Magnetic Workholding

### Electro-Permanent Magnetic Chuck EEPM-CIRS Series

■ Suitable in use for combine with Rotary type Surface Grinding Machine, CNC 5 Axis Machining Center ... etc.


#### Features:

1. 1~10 seconds control for power ON & OFF. No electric power supply required to keep the magnetic chuck ON, cable can be taken off for turning chuck freely while machining.
2. Un-obstructed movement of cutters during machining, the really functions of 5 side machining on workholding.

#### Applications:







1. EEPM-CIRSA: Suitable for thin & small workpiece.(Pole Size 35X35 mm, Magnetic Force 580 kgf/4 Poles).
2. EEPM-CIRS: Suitable for thin & medium workpiece.(Pole Size 50X50 mm, Magnetic Force 1250 kgf/4 Poles).
3. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
4. More functions for cooperate with Induction Block and Spring Block.(See the detail of Option Accessories).

#### Working Example

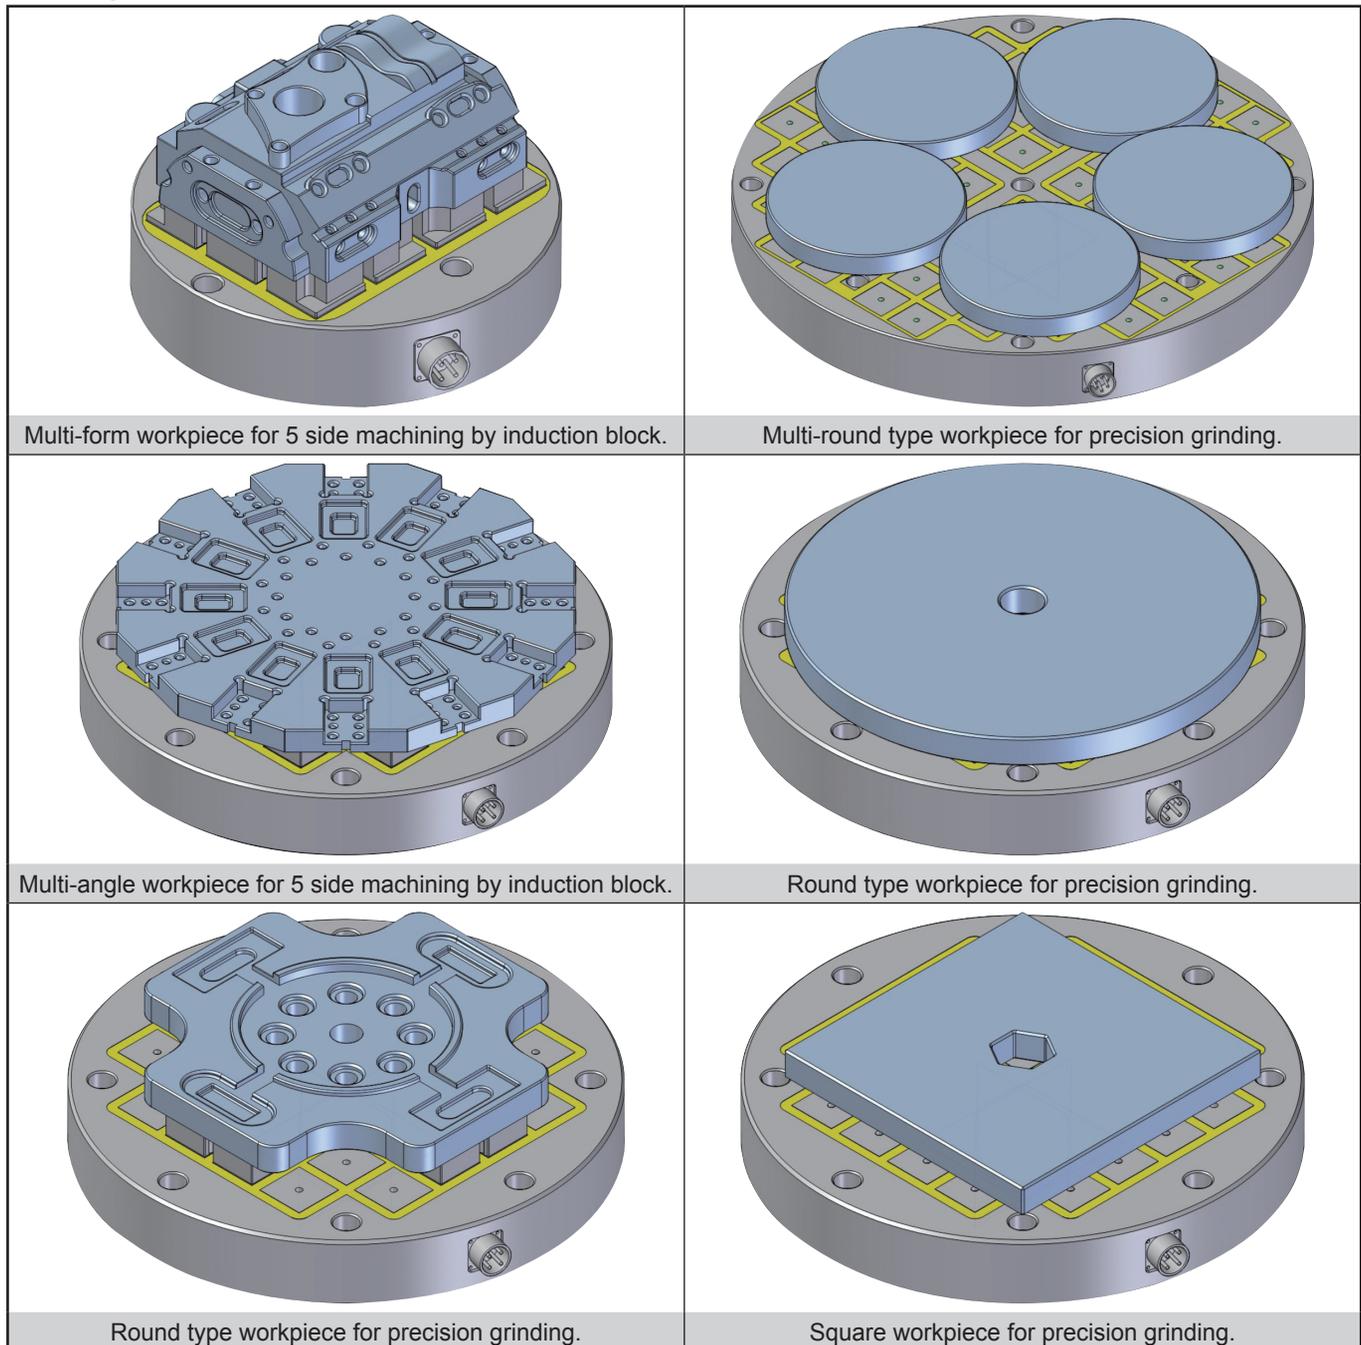



**Working Example**

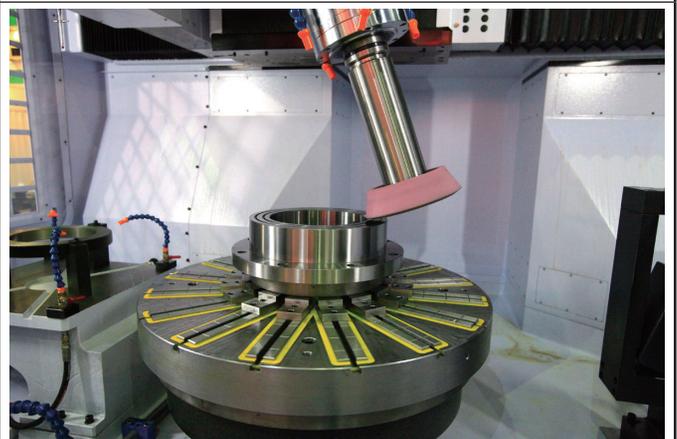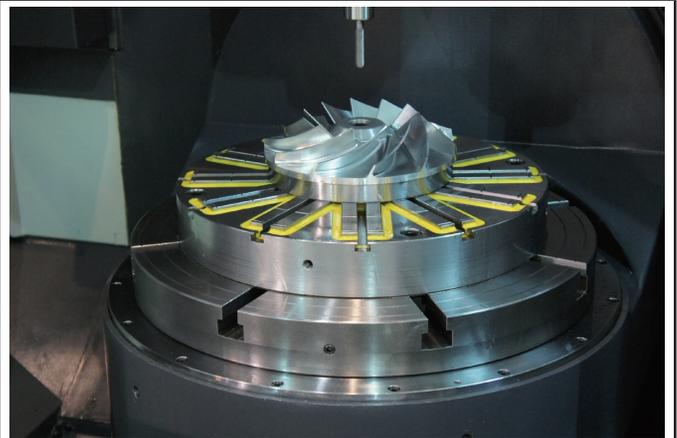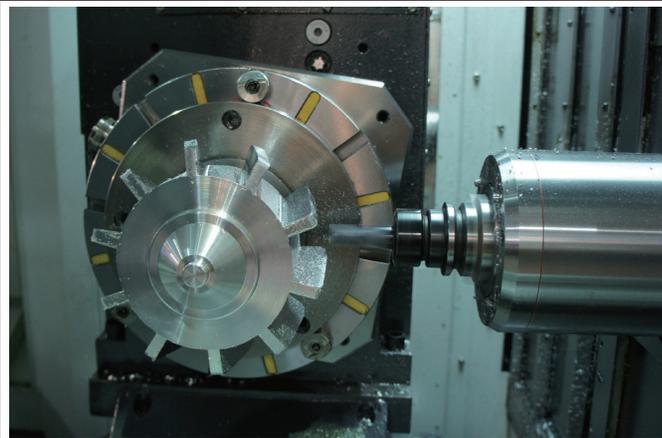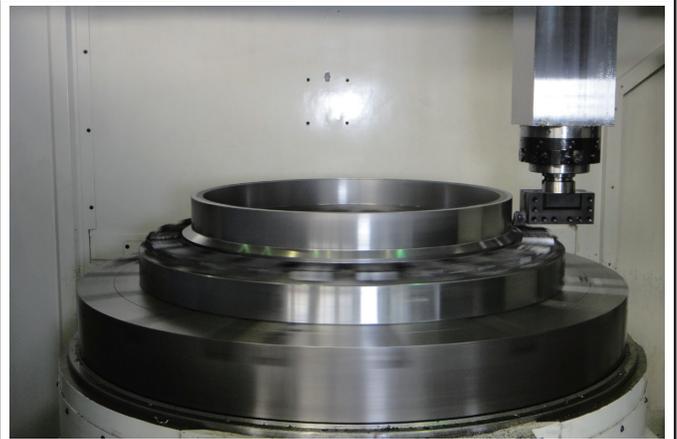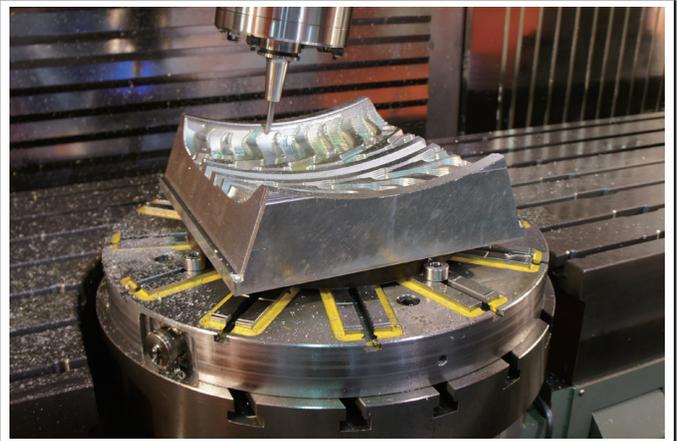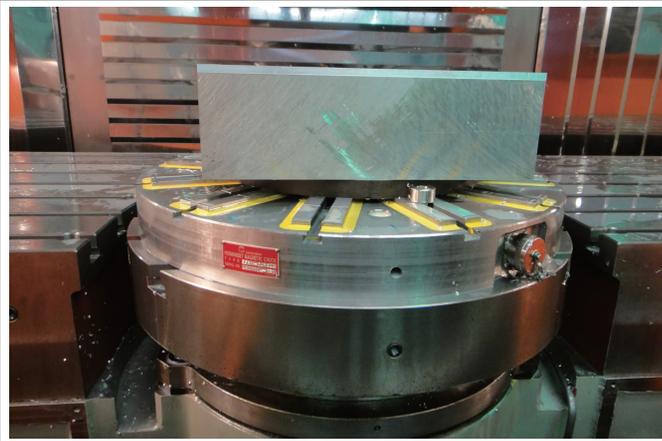




# Mag Vise

## Magnetic Workholding

### Electro-Permanent Magnetic Chuck EEPM-CIR & EEPM-CIRS Series

■ Suitable for use on Vertical Lathe, CNC 5 Axis Machining Center ...etc.

#### Working Example

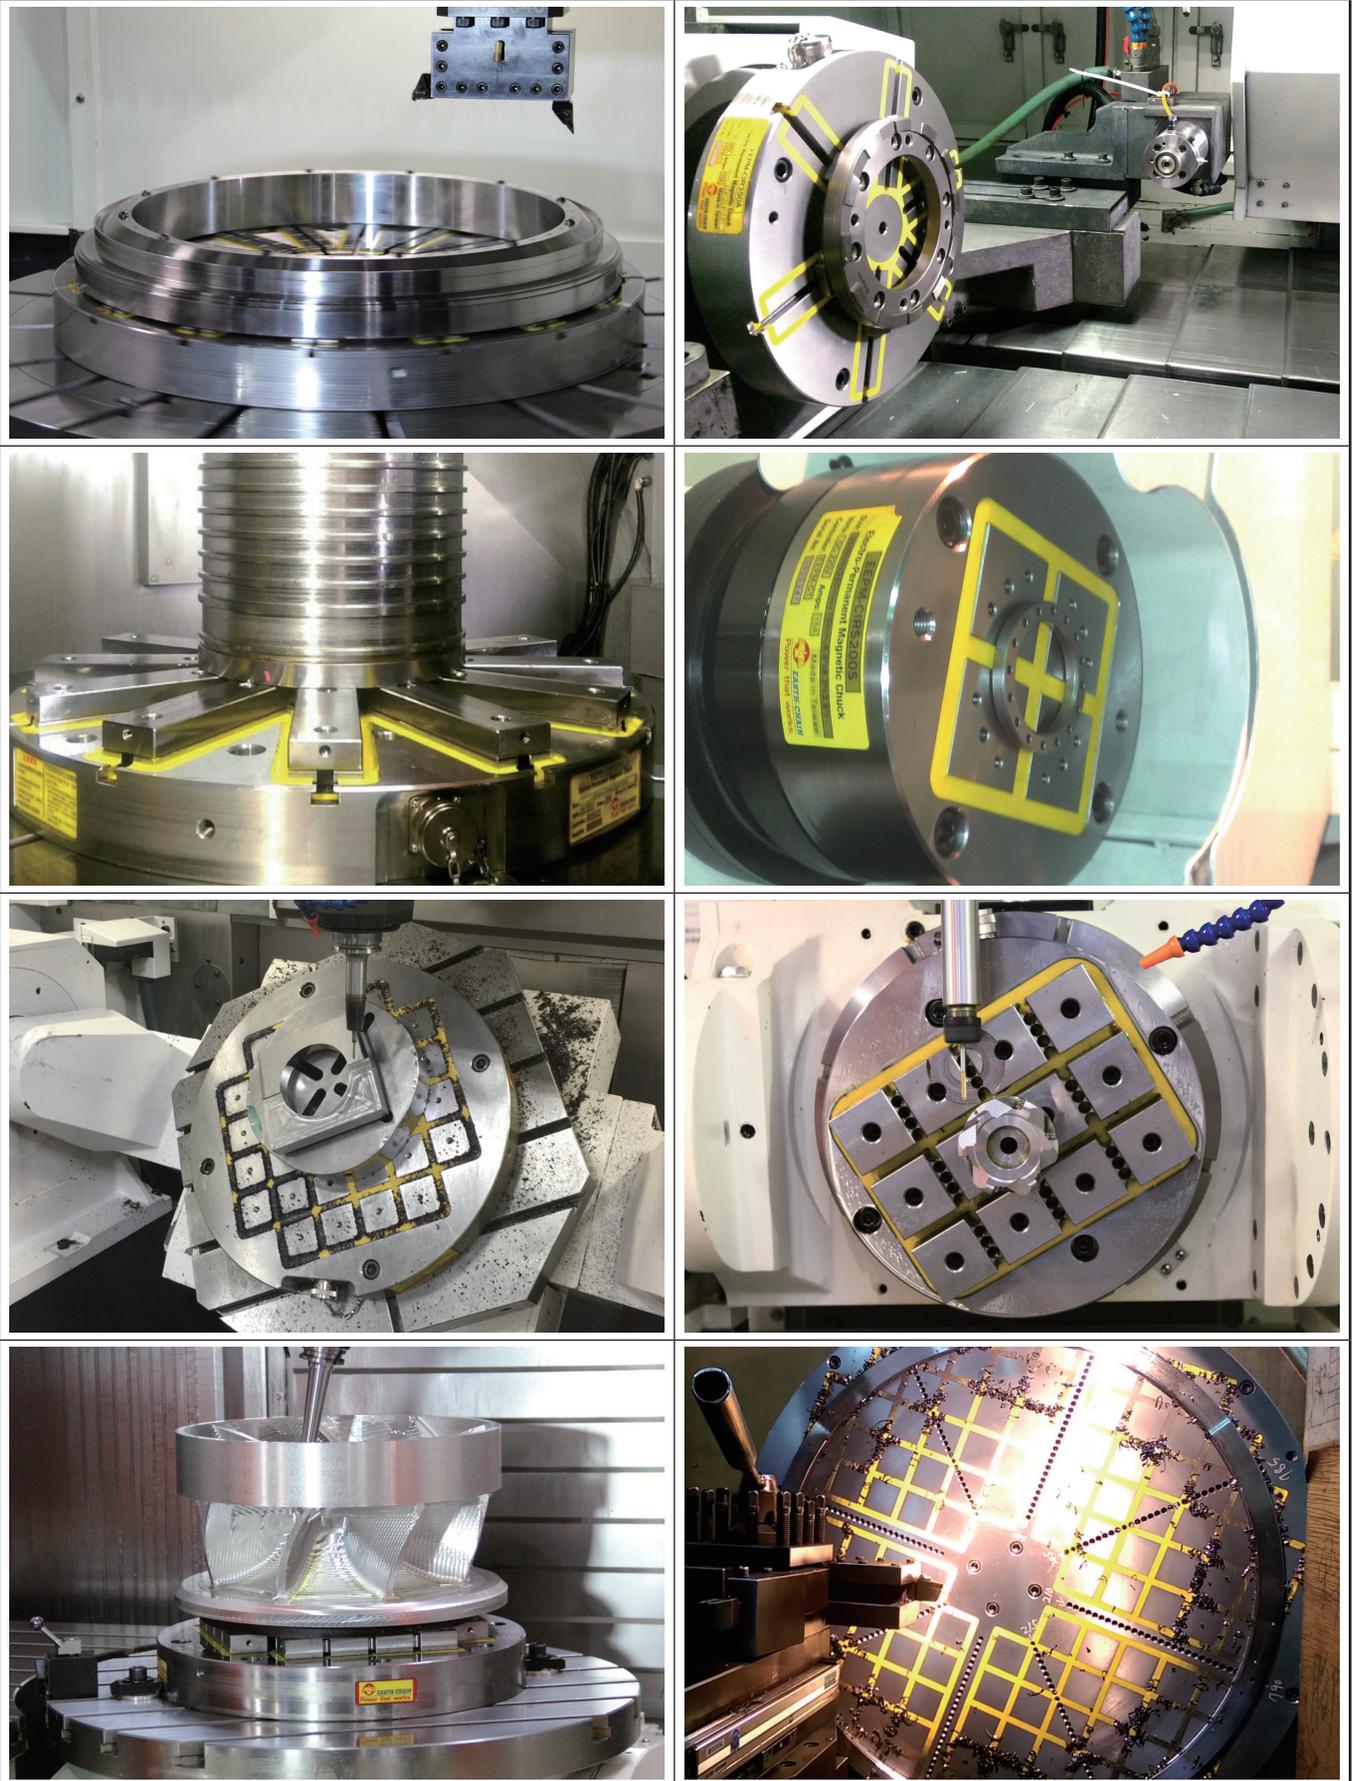




We made special EEPM chucks required from customers. Customer can be purchase special EEPM chuck depends on the functions of the machine, workpiece and applications for increase efficiency and quality on machining.

**Example of Custom-Made EEPM Chucks**



Used for Linear Guideway grinding.

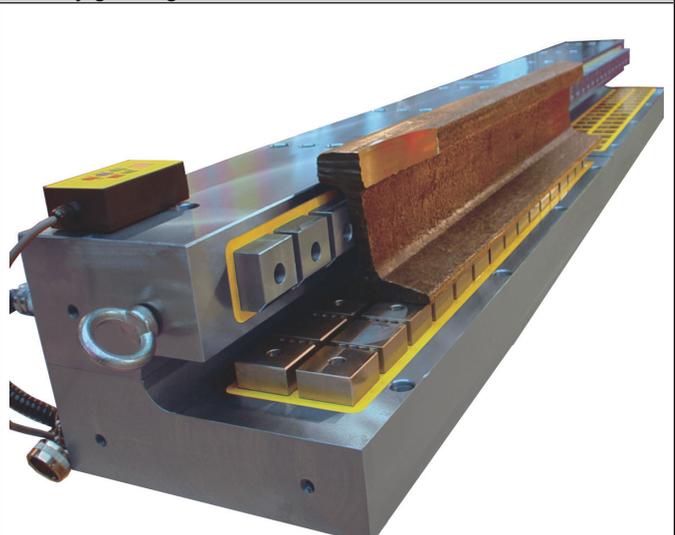

Used for cell phone case fine grinding.

Used on Wire Cutter for positioning mould clamping.



Used on Double Column Machining Center for machining big & multi-medium workpiece 5 sides machining.



# Mag Vise



## Magnetic Workholding

### Custom-Made EEPM Chucks


■ Custom-chucks built to your specification.

We made special EEPM chucks required from customers. Customer can be purchase special EEPM chuck depends on the functions of the machine, workpiece and applications for increase efficiency and quality on machining.

#### Example of Custom-Made EEPM Chucks

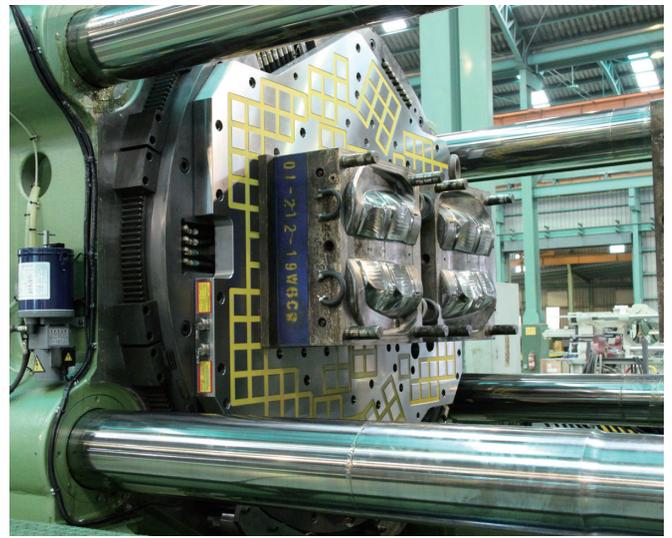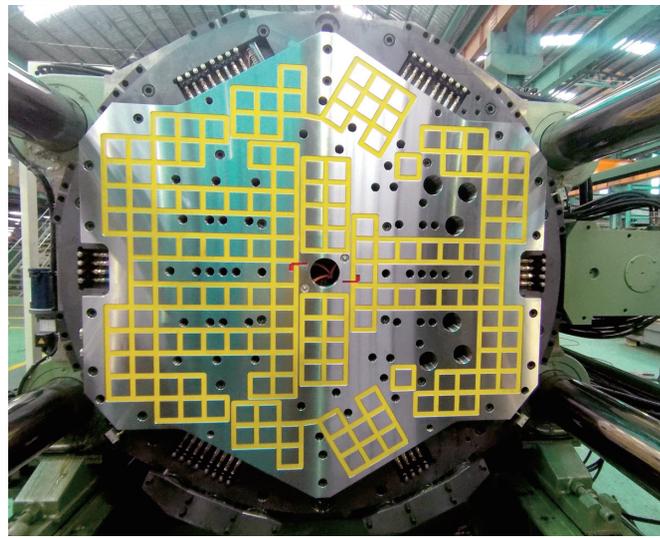

Used for Quick Mold Change System of Plastic Injection Machines

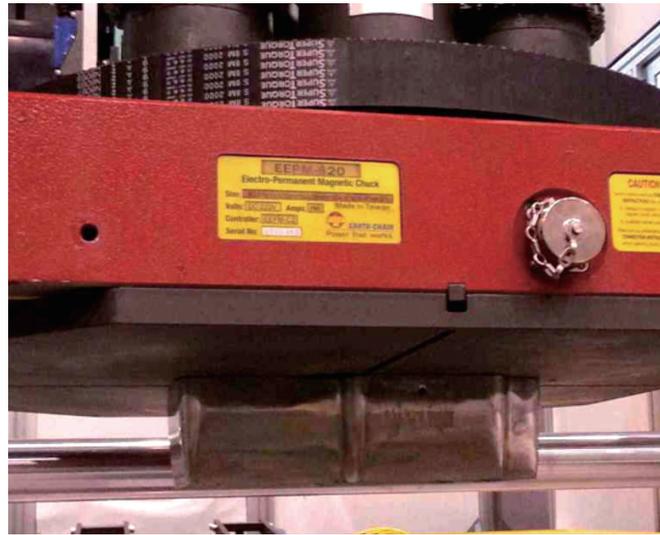


Used on Shearing Machine for positioning mould clamping.




Used on Double Column Machining Center for machining big & multi-medium workpiece 5 sides machining.




**Each voltage with two specifications can be choice:**

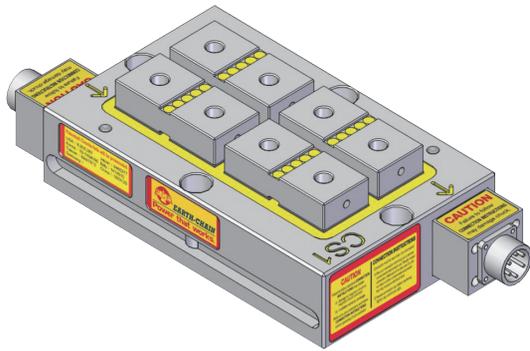


EEPM-2030C-220V Series

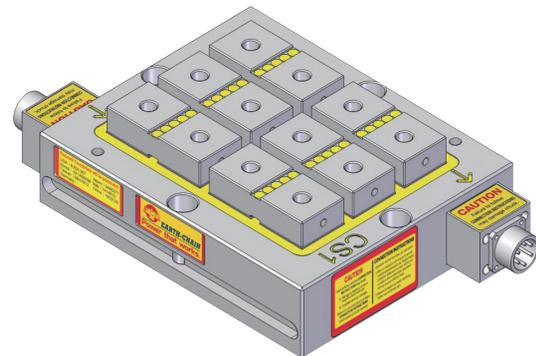

EEPM-2530C-380V~440V Series

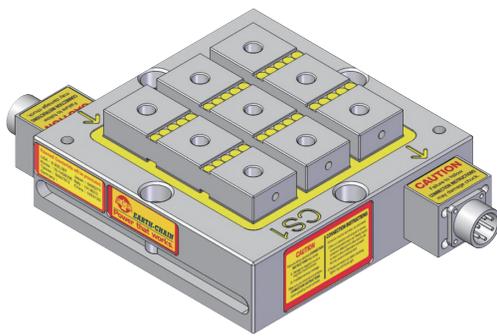

EEPM-2525C-220V Series

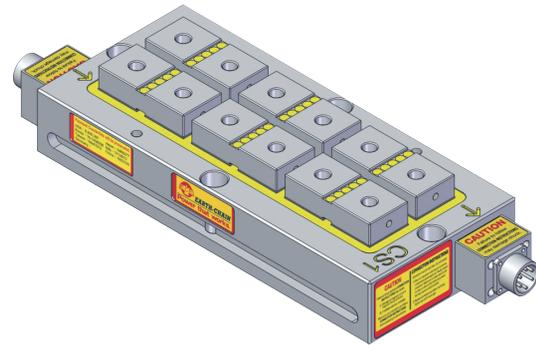

EEPM-2040C-380V~440V Series

**Features:**



1. Super power magnetic force 1250 kgf/100 cm (4 poles), can meet various machining process.
2. Structure of Electro-Permanent Magnetic Chuck, no electric power supply required to keep the chuck On, it could be used for long time and never get temperatures to affect the accuracy of workpiece.
3. Using innovation series and parallel connection modular system, EEPM-C provides a more economic solution to hold various size workpiece. Flexible units could be deployed with various quantities, locations, and distance to each other depending on customers' various workpiece shapes. Save time and cost during machining and increase the accuracy that makes the goods have higher quality and value.
4. According to the size of the workpiece [point] hold the workpiece, changing the magnetic fixture [surface] clamp the workpiece, 100% use of the chuck in an all-round way. Can reduce equipment costs and increase more profits.
5. Without any obstructed movement of cutters during machining. Can do 5-sides machining, drilling, tapping, grooving and forming can be done all in one cycle. This greatly enhances work efficiency, and reduces repeated positioning tolerances to achieve best machining accuracy.

**How to choose:**

According application requirement can choose EEPM-C Series as following steps:

1. Choose number of chucks according to Voltage and workpiece required.
2. Choose Chuck Controller.
3. Choose the length of Chuck Connection Cables.
4. Choose the Screw Size.
5. Choose the length of Power Cord.



Note: A maximum of 16 chucks can be connected to one controller. If the workpiece dimension requests more than 16 chucks please use two groups of chucks unit.

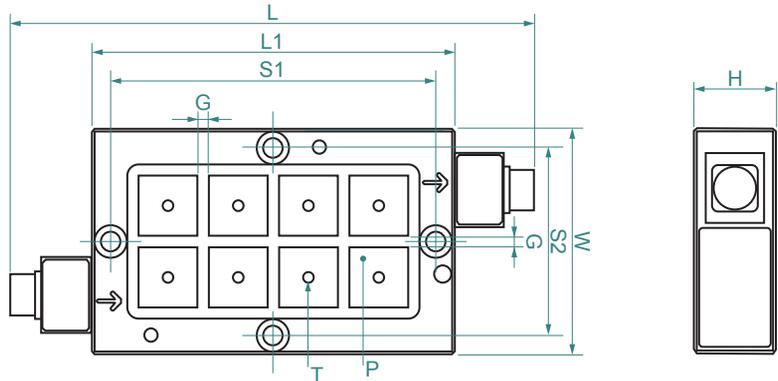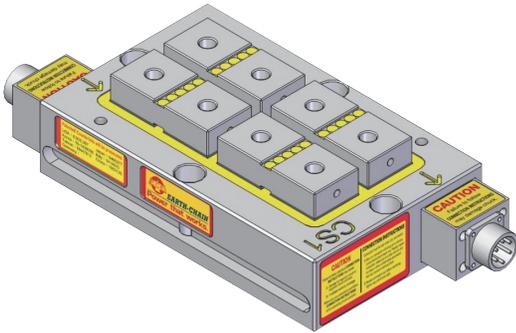

EEPM-2030C-220V Series

Unit: mm



MODEL NO	VOLTAGE (Single Phase)	DIMENSION							PITCH G	POLE P	NO. OF POLE	HOLDING POWER	CHUCK N.W.
		W	L	L1	S1	S2	H	T					
EEPM-2030CS1	DC 220V	190	440	310	280	160	70	M8	10	50×50	8	2500±5%	33.5kg
EEPM-2030CS2													
EEPM-2030CS3													
EEPM-2030CS4													

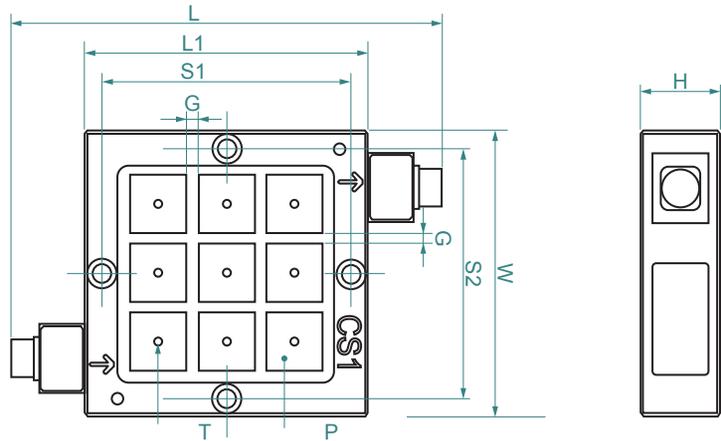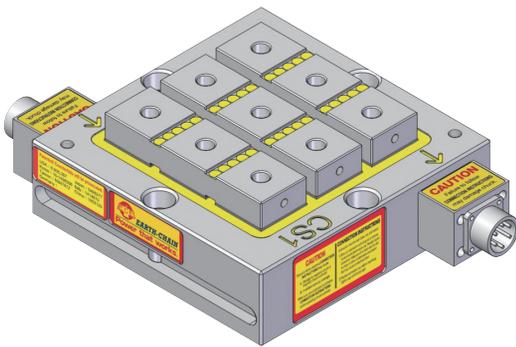

EEPM-2525C-220V Series

Unit: mm



MODEL NO	VOLTAGE (Single Phase)	DIMENSION							PITCH G	POLE P	NO. OF POLE	HOLDING POWER	CHUCK N.W.
		W	L	L1	S1	S2	H	T					
EEPM-2525CS1	DC 220V	250	380	250	220	220	70	M8	10	50×50	9	2800±5%	35.0kg
EEPM-2525CS2													
EEPM-2525CS3													
EEPM-2525CS4													

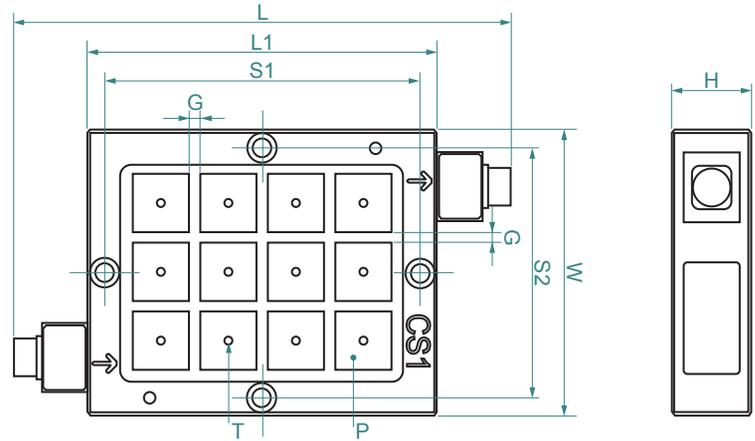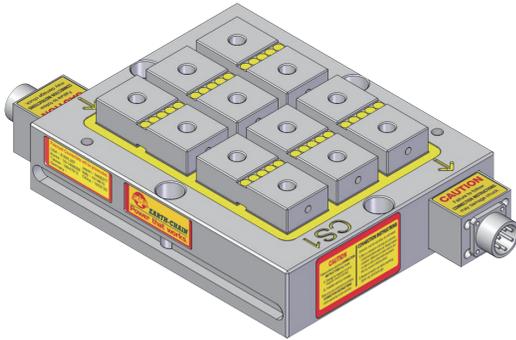

EEPM-2530C-380V~440V Series

Unit: mm

MODEL NO	VOLTAGE (Single Phase)	DIMENSION							PITCH G	POLE P	NO. OF POLE	HOLDING POWER	CHUCK N.W.
		W	L	L1	S1	S2	H	T					
EEPM-2530CS1 EEPM-2530CS2 EEPM-2530CS3 EEPM-2530CS4	DC 380V ↕ 440V	250	440	310	280	220	70	M8	10	50×50	12	3750±5%	44.0kg

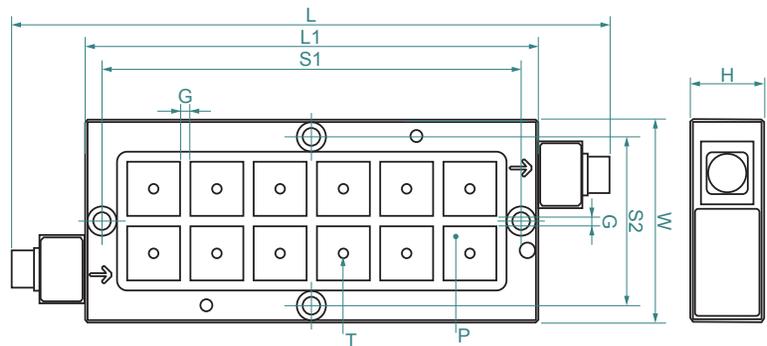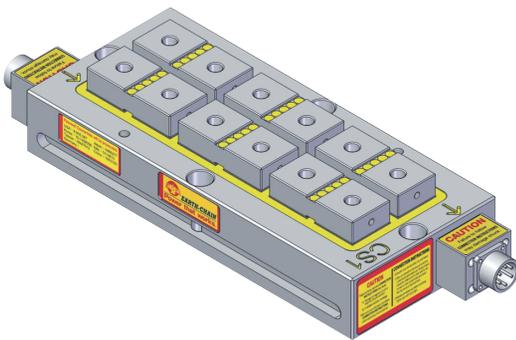

EEPM-2040C-380V~440V Series

Unit: mm

MODEL NO	VOLTAGE (Single Phase)	DIMENSION							PITCH G	POLE P	NO. OF POLE	HOLDING POWER	CHUCK N.W.
		W	L	L1	S1	S2	H	T					
EEPM-2040CS1 EEPM-2040CS2 EEPM-2040CS3 EEPM-2040CS4	DC 380V ↕ 440V	190	560	430	400	160	70	M8	10	50×50	12	3750±5%	41.0kg



**Chuck Controller EPM-C4C**




The controller EPM-C4C can be controlled for 1 to 4 piece of EPM-CS1、CS2、CS3、CS4 at same time and with detection abnormal function.


Unit: mm

MODEL NO	VOLTAGE (Single Phase)	DIMENSION			CONNECTION AVAILABLE
		L	W	H	
EPM-C4C	AC 220V / AC 380V~440V	370	220	125	3~16 Chucks (CS1x1~4 pcs, CS2x1~4 pcs, CS3x1~4 pcs, CS4x1~4 pcs)

**Standard Accessories: Induction soft block**



EPM-IB225

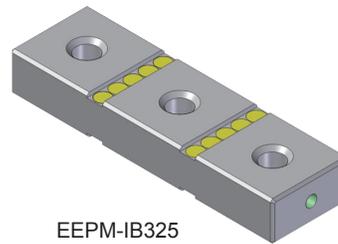

EPM-IB325


**Convenience and Accuracy:**

The induction blocks screwed on the magnetic chuck are replaceable and consumable accessories. You can fine grinding the surface or forming induction blocks according to requirements of workpiece by the machine directly that the parallelism of induction blocks can be 100% with the machine and the 5-sided machining can be easily conducted.

**Standard accessories (Screw Size)**

T-Slot	A	B	C	D	F	Thread
18	18 <sup>+0</sup> <sub>-0.3</sub>	20	11	28	32	5/8"-11
22	20 <sup>+0</sup> <sub>-0.3</sub>	26	14	32	38	5/8"-11
28	26 <sup>+0</sup> <sub>-0.3</sub>	26	16	41	40	5/8"-11

Chuck installation direction:

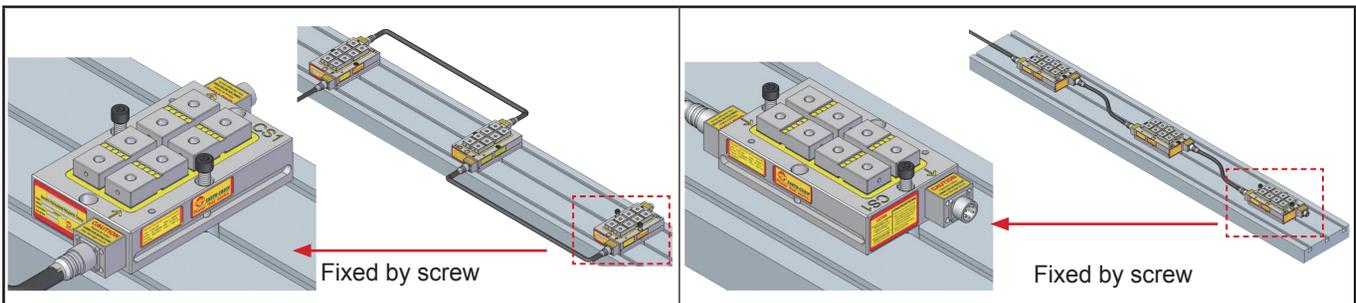



### Chuck Connection Cable

#### Standard Accessories - (Iron Flexible Conduit)

Suitable for general machining.

#### Optional Accessories – (Stainless Steel Flexible Conduit)

Suitable for long time heavy duty machining.  
With high toughness and high strength preventing iron chips cut off the wire.



MODEL NO	LENGTH
EEPМ-CC03	300mm
EEPМ-CC05	500mm
EEPМ-CC10	1000mm
EEPМ-CC15	1500mm

MODEL NO	LENGTH
EEPМ-CC05B	500mm
EEPМ-CC10B	1000mm
EEPМ-CC15B	1500mm

### CONNECTION TABLE

MODEL NO	EEPМ-2030C 220V			EEPМ-2525C 220V			EEPМ-2530C 380V~440V			EEPМ-2040C 380V~440V			
	CHUCK NOS.	HOLDING POWER OF EACH CHUCK	TOTAL HOLDING POWER kgf ±5%	CURRENT A MP	HOLDING POWER OF EACH CHUCK	TOTAL HOLDING POWER kgf ±5%	CURRENT A MP	HOLDING POWER OF EACH CHUCK	TOTAL HOLDING POWER kgf ±5%	CURRENT A MP	HOLDING POWER OF EACH CHUCK	TOTAL HOLDING POWER kgf ±5%	CURRENT A MP
	3		7500	7A		8400	7A		11250	8A		11250	8A
	4		10000	9A		11200	9A		15000	10A		15000	10A
	5		12500	11A		14000	10A		18750	12A		18750	12A
	6		15000	12A		16800	11A		22500	13A		22500	13A
	7		17500	14A		19600	12A		26250	16A		26250	16A
	8		20000	16A		22400	14A		30000	18A		30000	18A
	9	2500±5%	22500	17A	2800±5%	25200	15A	3750±5%	33750	19A	3750±5%	33750	19A
	10		25000	19A		28000	17A		37500	21A		37500	21A
	11		27500	20A		30800	19A		41250	23A		41250	23A
	12		30000	22A		33600	20A		45000	25A		45000	25A
	13		32500	24A		36400	22A		48750	27A		48750	27A
	14		35000	26A		39200	23A		52500	29A		52500	29A
	15		37500	27A		42000	24A		56250	30A		56250	30A
	16		40000	29A		44800	26A		60000	33A		60000	33A

If the workpiece dimension requests more than 16 chucks, please use two groups of chuck unit.


#### Notice:

- EEPМ-C Series each voltage has two specifications can be choose, each specification has four models EEPМ-CS1, CS2, CS3 and CS4 can be connected but each model can be up to 4 units only.
- The controller EEPМ-C4C can be controlled EEPМ-CS1, CS2, CS3 and CS4 each of them 4 pieces at same time.
- Maximum distance required:

No. of EEPМ-CS	3-4 Chucks	5-10 Chucks	11-16 Chucks
Max. Distance Between Chucks	800 mm	1000 mm	1500 mm




**Example of Vertical Lathe on Setting:**

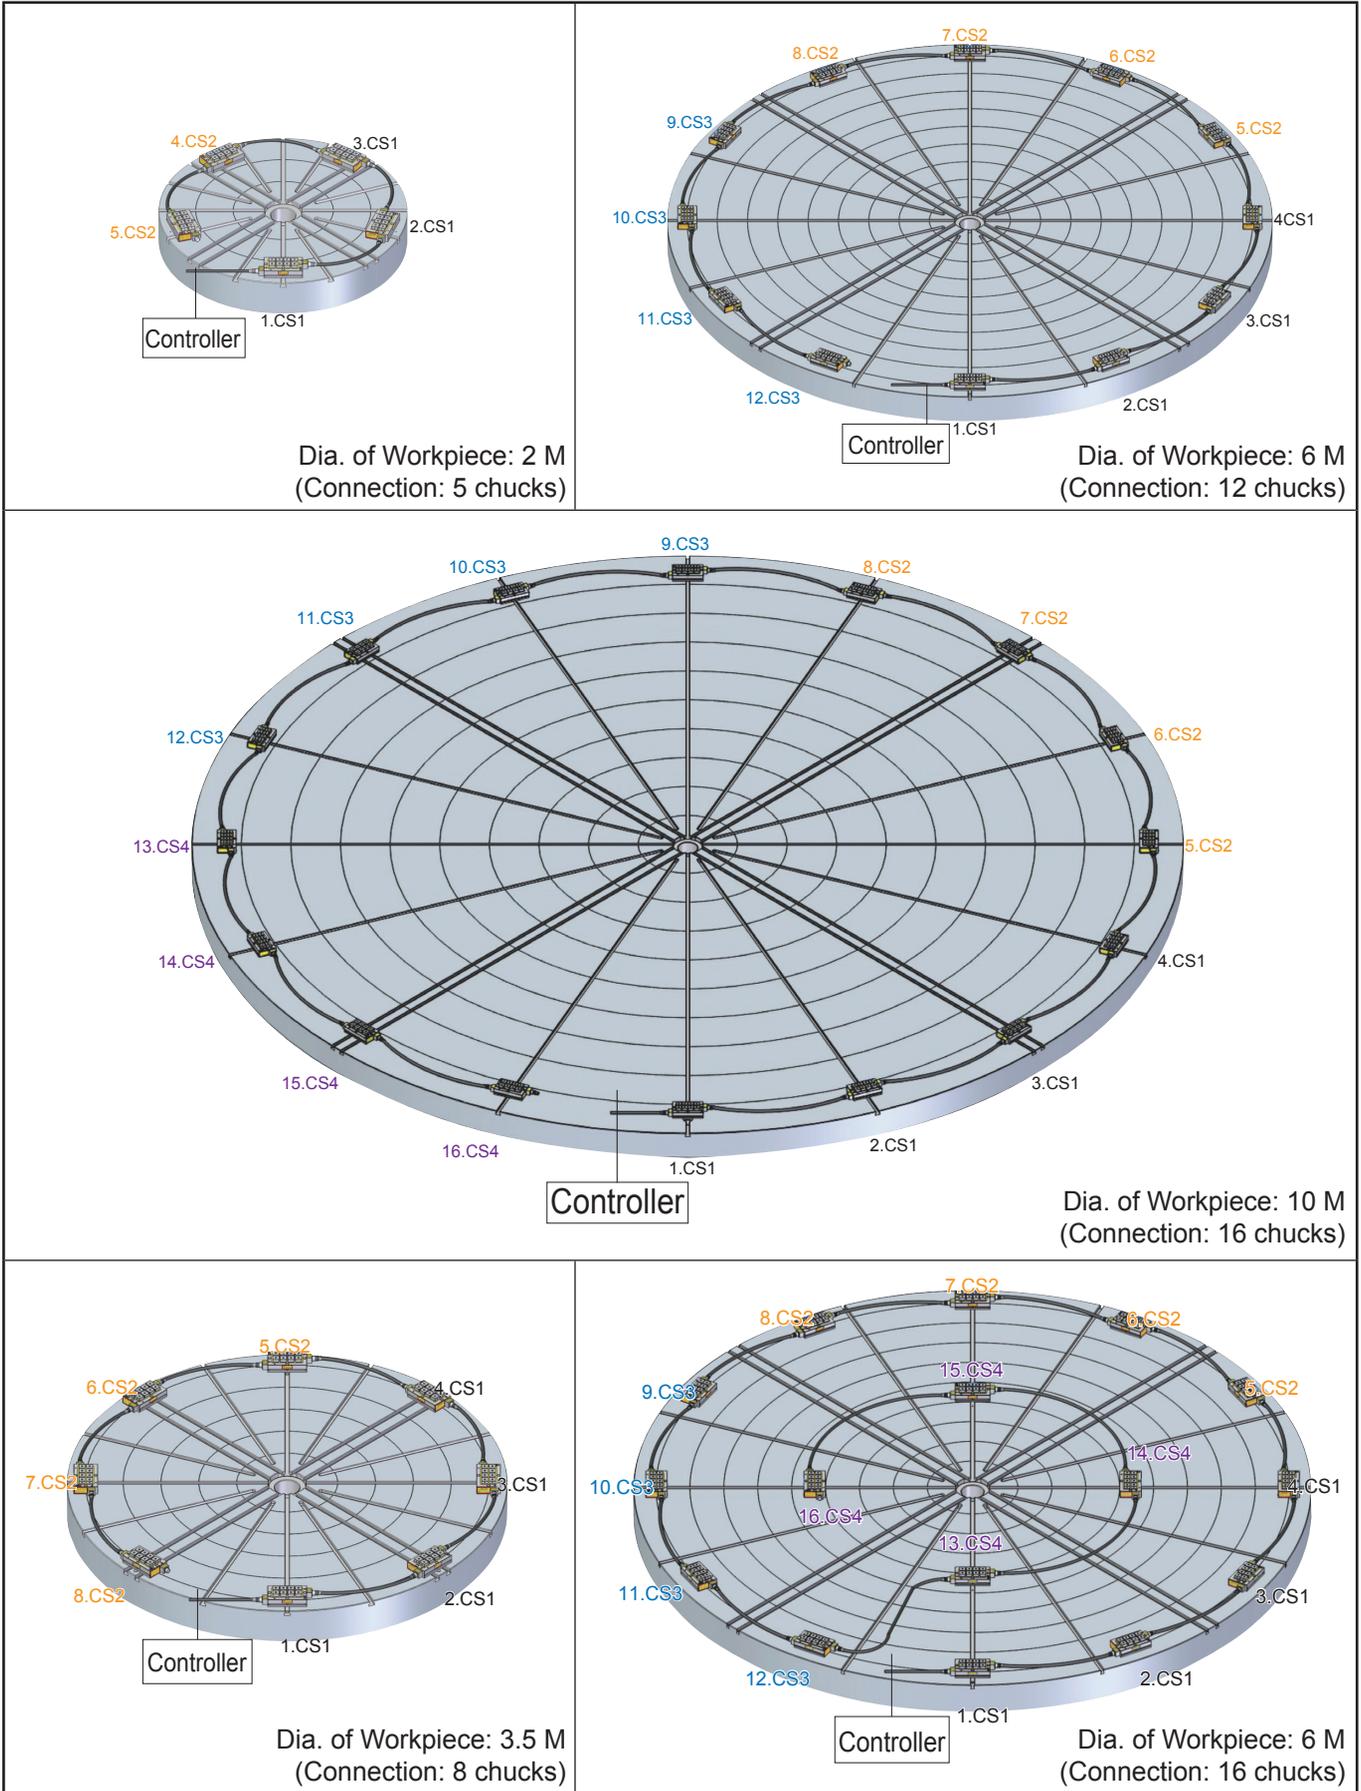



Example of Double Column Machining Center and CNC Machining Center on Setting

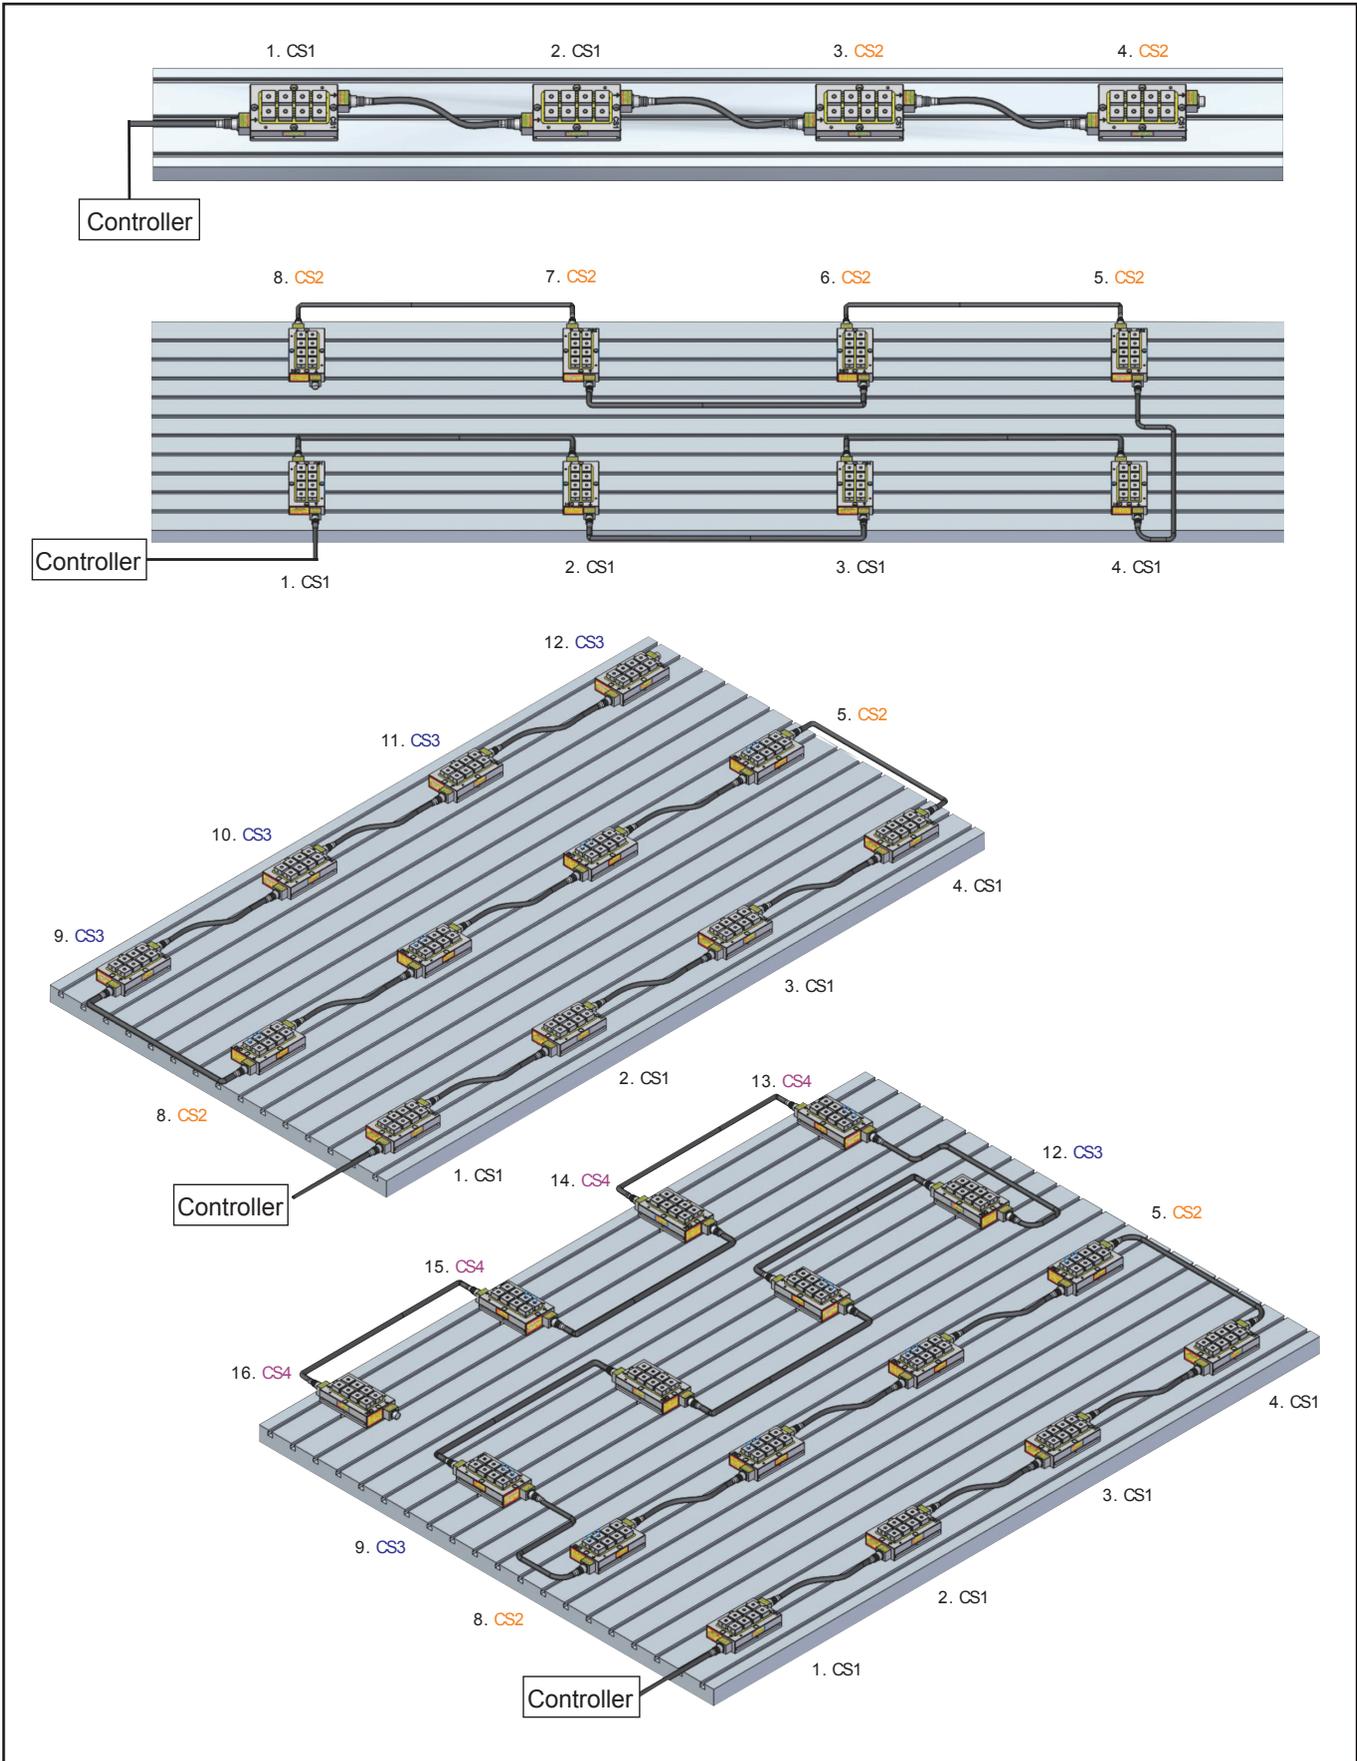

**Mag Vise**  
Magnetic Workholding

**Electro-Permanent Magnetic Chuck-Connection Type  
EPPM-C Series**

■ Suitable for use on large Vertical Lathe, Double Column Machining Center and CNC Machining Center ...etc.



**Working Example**





Patented

Taiwan M258824, Italy / USA us7, 224, 251, B2 / Japan 3106264, / Korea 0366170, / Germany 20 2004 009 776.1 / China ZL2004 2 0067865.1

**Features:**

1. The all new model Magnetic Clamping Block ECB Series are a new sense of clamping way for metal working on CNC Machining Center and Milling Machine in quick clamp workpieces.
2. Free to set up position, numbers and distance of Magnetic Clamping Block according to the size of workpiece.
3. The ECB Series including changeable Induction Soft Block. It can be revised the surface to be 100% accuracy on the machine for clamp workpieces. Can be also cutting, drilling, tapping and slotting directly to the Induction Soft Block during machining workpiece. Multi-function of Induction Soft Block, the user can make it by themselves according to workpiece required.
4. Two machining circle for finish workpiece machining, increase a lot of machining efficiency and achieve accuracy required.

**Applications:**


1. Most suitable for medium and large size of workpiece machining on milling machine and CNC machining center.
2. Minimum size of workpiece required as bigger than an area of two Magnetic Clamping Blocks.
3. The Magnetic Clamping Blocks are not suitable for small workpiece clamping.



**Note:**

1. Please always make sure the Switch was in ON position before machining.
2. The Magnetic Clamping Blocks are not suitable for non-magnetic material, such as brass, copper, aluminum and stainless steel, etc.
3. The principle of Magnetic Clamping Blocks is magnetism of N. S. poles, so please always put the workpiece between N. S. poles.  
(The middle of top clamping range)

**Working Example**

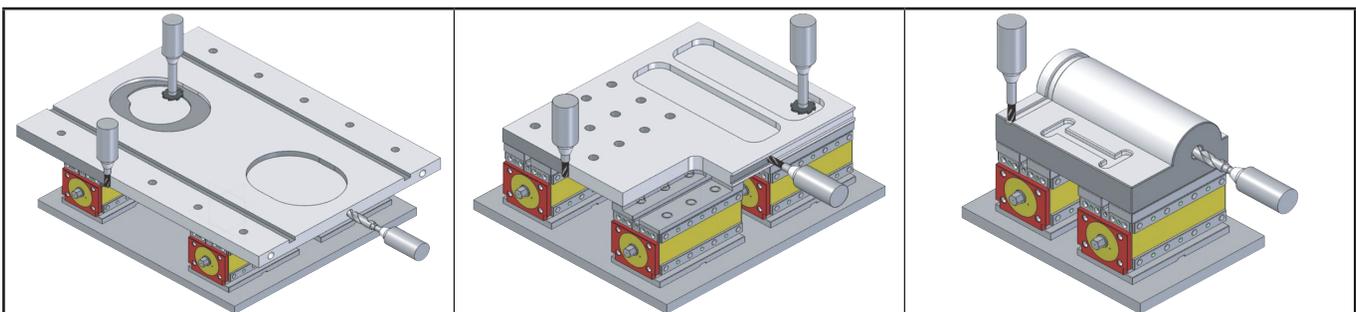


MODEL NO	HOLDING POWER	MINIMUM THICKNESS OF WORKPIECE REQUIRED	G	G= +0 -0.03	H	H= +0 -0.03	N.W.
ECB-210	2100kgf±5%	30	115	Accuracy control required	134	Accuracy control required	36kg
ECB-120	1200kgf±5%	20	92.5		108		18kg
ECB-075	750kgf±5%	15	85		78		9.5kg
ECB-050	500kgf±5%	15	61		78		7kg


Continual to next page.




**Dimension ECB-210**

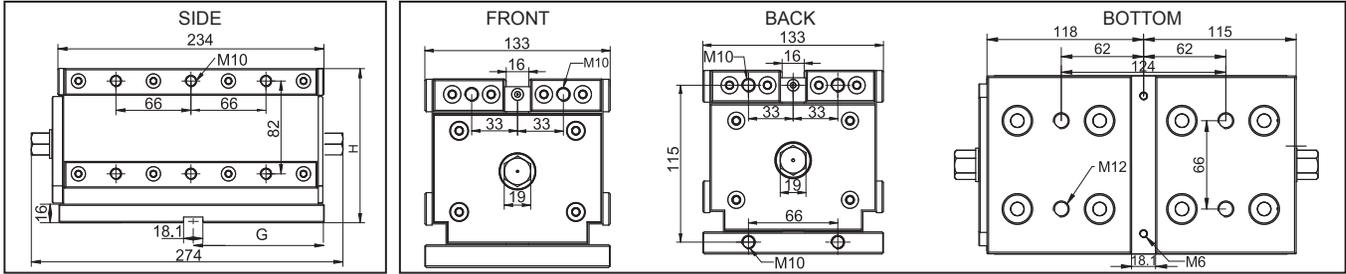


**ECB-120**

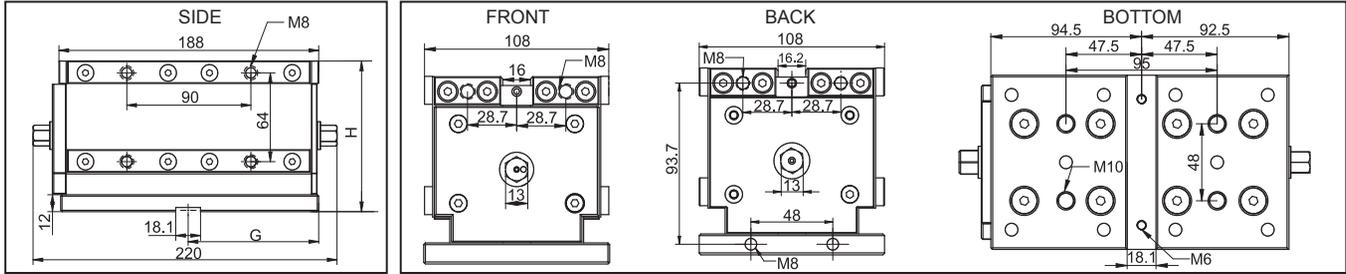


**ECB-075**

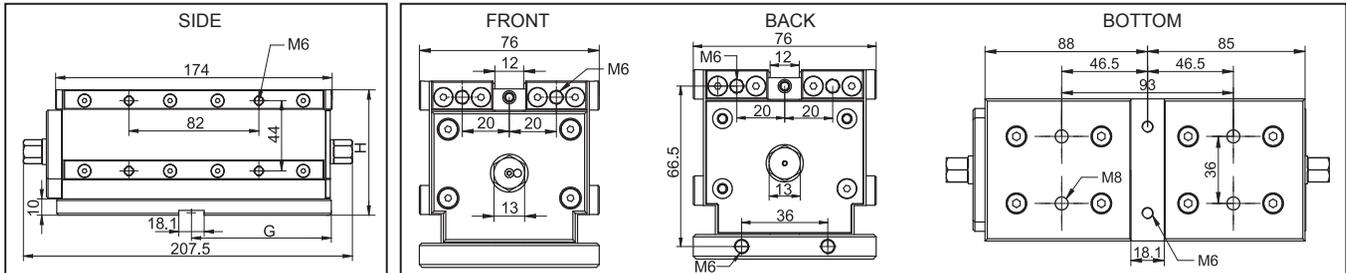

**ECB-050**

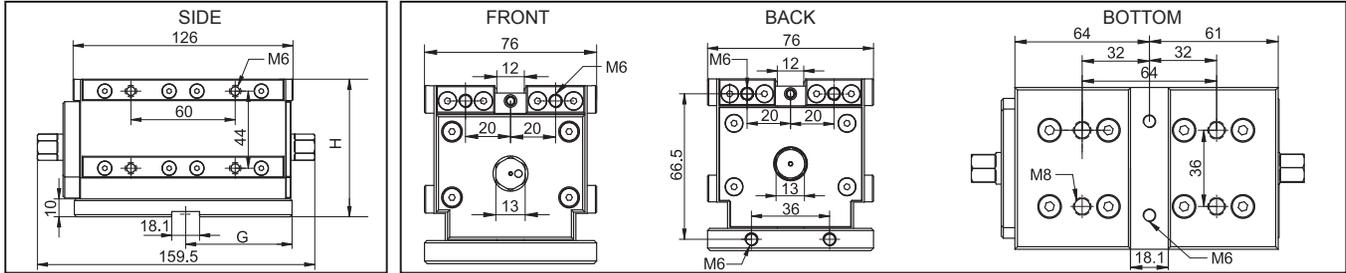

**Accuracy Control**

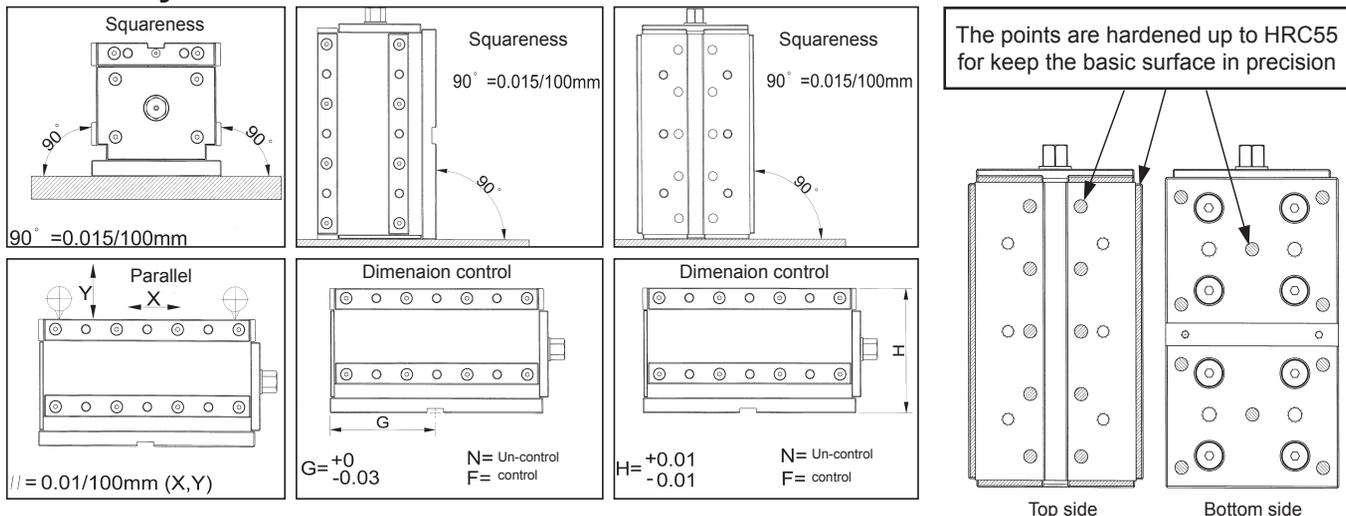



■ Suitable for medium & large workpiece. (Can do 5 sides machining).


Customer can be makes switch connector by standard hexagon steel bar themselves for depends on length required. The dimension of hexagon bar required as ECB-210 --- 19mm, ECB-120, 075, 050 --- 13mm.



Maximum & Minimum distance required

Unit:mm


MODEL NO		ECB-210	ECB-120	ECB-075	ECB-050
SIDE DISTANCE	Min.	100	60	25	25
	Max.	1000	600	400	400
FRONT & BACK DISTANCE	Min.	70	40	40	40
	Max.	500	300	200	200

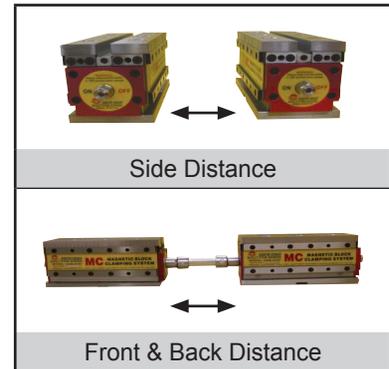


**Special made Induction Block:**

Customer can makes special induction block themselves for depends on the workpiece and application required.

(The material of induction block required as general and low carbon steel)

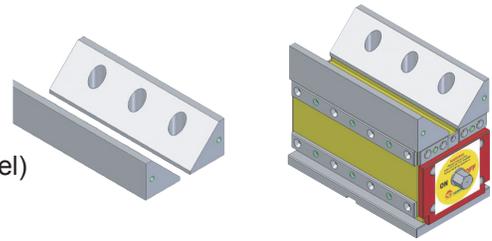

**Example**

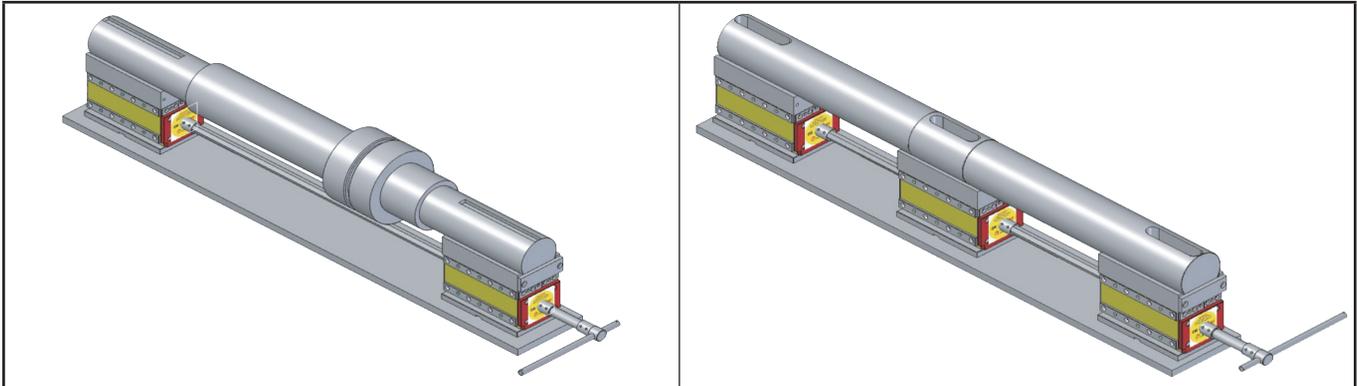

**Working Example**








# Mag Vise Magnetic Workholding

## Permanent Magnetic Clamping Block ECB-120V12 Series

■ Suitable for use on CNC Horizontal Machining Center.

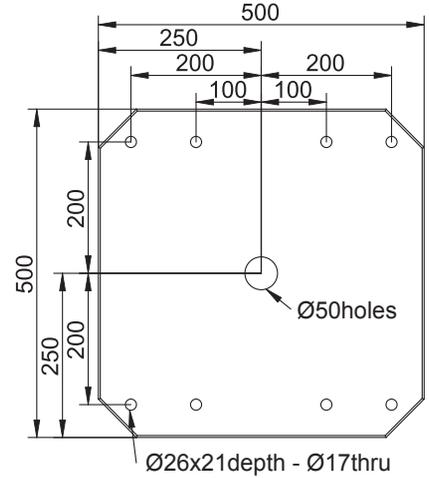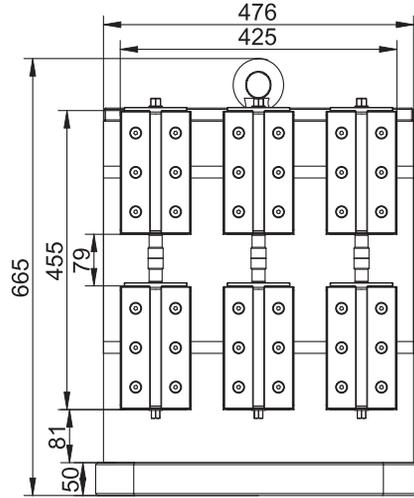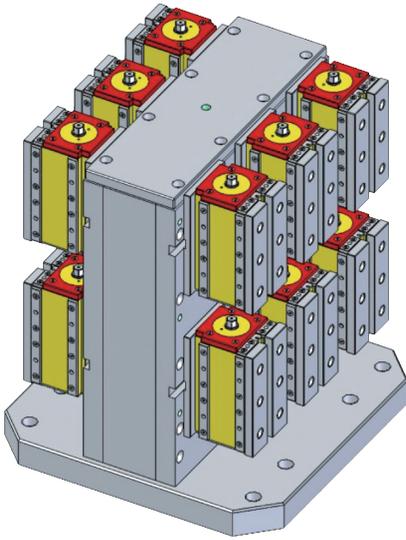

### Features & Applications:

1. Each 6pcs of ECB-120 magnetic clamping block on 2 working face, each of 7200 kgf  $\pm$ 5% (1200kgf $\times$ 6) holding power, can be clamping 2 big workpieces for machining at same time.
2. Customer can makes and assemble any type of clamping device themselves by ECB series for depends on workpieces required.
3. Suitable for use on CNC Horizontal Machining Center. (can do 5 sides machining.)

### Working Example





**Working Example**





**ANTARCTIC ARCTIC ZERO**



**Mag Vise Magnetic Workholding**

CNC Vertical/ Horizontal Machining Center  
CNC Vertical/Horizontal Turning Lathes  
Double Column Vertical Machining Center  
CNC 4/5 Axis Machining Center

Quick Mold Change Systems for  
Plastic Injection Machine  
Lifting Magnet Series  
Universal Arm Magnetic Stand



**Earth-Chain Enterprise Co., Ltd.**

Tel: +886-4-2630-3737 <http://www.earth-chain.com.tw>

Fax: +886-4-2630-3636 E-mail: [ece@earth-chain.com.tw](mailto:ece@earth-chain.com.tw)

No. 551, Sec. 1, Gangbu Rd., Wu-Chi Dist., 43546 Taiwan

