


ISO 7380+A ZN
CALIDAD 10.9

TORNILLO ALLEN CON ARANDELA ZN

Nuevo

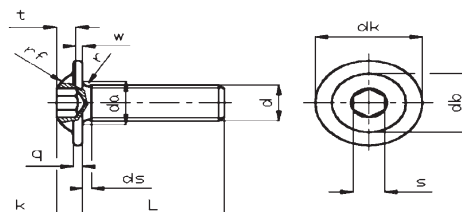

Diámetro		M3	M4	M5	M6	M8	M10	M12
P	paso	0.5	0.7	0.8	1	1.25	1.5	1.75
	máx	1	1.4	1.6	2	2.5	3	3.5
	mín	0.5	0.7	0.8	1	1.25	1.5	1.75
da	máx	3.6	4.7	5.7	6.8	9.2	11.2	14.2
dk	máx	6.90	9.4	11.80	13.60	17.80	21.90	24.00
	mín	6.60	9.04	11.44	13.30	17.37	21.47	23.55
K	máx	1.65	2.20	2.75	3.30	4.40	5.50	6.60
	mín	1.40	1.95	2.50	3.00	4.10	5.20	6.24
q	-	0.7	0.8	0.9	1.2	1.5	1.8	2.4
db	-	5.3	6.8	8.6	9.7	12.8	15.9	
r	mín	0.1	0.2	0.2	0.25	0.4	0.4	0.6
rf	-	3.5	4.5	5.2	6	7.5	10	11
s	CH	2	2.5	3	4	5	6	8
	máx	2.045	2.560	3.071	4.084	5.084	6.095	8.175
	mín	2.020	2.520	3.020	4.020	5.020	6.020	8.025
t	máx	1.45	1.65	2.37	2.56	3.35	4.05	4.61
	mín	1.04	1.30	1.56	2.08	2.60	3.12	4.16
w	mín	0.2	0.3	0.38	0.74	1.05	1.45	1.63

L \ M	M-3	M-4	M-5	M-6	M-8	M-10	M-12
6	8.31	9.18	11.70	20.01			
8	7.54	7.22	9.62	16.87			
10	7.14	5.80	5.80	9.18	20.77		
12	7.46	6.02	6.02	7.87	18.69		
16	8.22	6.34	6.34	7.22	14.21	35.23	
20	9.07	7.22	7.33	7.54	14.65	27.35	
25	10.37	8.31	8.63	7.87	15.30	28.04	
30	12.43	10.49	9.52	9.18	16.61	29.55	
35		12.57	11.26	10.09	18.37	30.82	
40		14.65	13.55	11.60	20.01	34.19	
50			22.71	18.69	26.88	43.93	
60					41.43		
70							
80							
90							
100							

C
O
N
S
U
L
T
A
R