




SUPPORT PARTS

SU01~SU27



JIG REST BUTTON OFFSET JIG REST BUTTON SHOULDER SUPPORT CYLINDER LOCATING CYLINDER

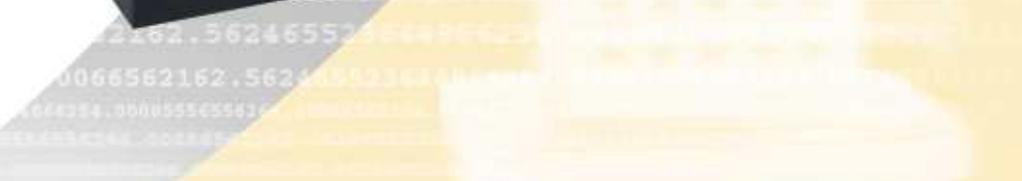


SU01


JIG REST BUTTON



- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: mount onto base plate or clamp cube for supporting workpiece.
- Features: Jig rest buttons are extremely useful as supports, side locator pads, and jig feet.

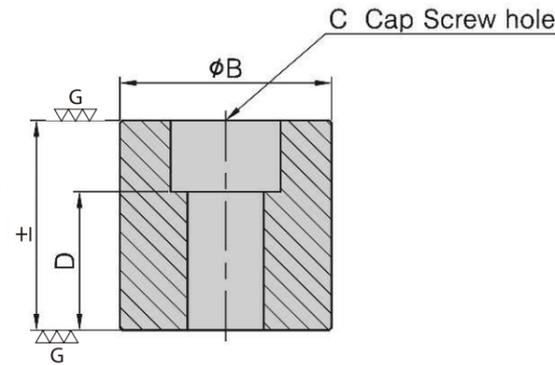

| MODEL NO. | A | B | C | D | kg |
|-----------|----|----|-----|----|------|
| SU01-1230 | 30 | 40 | M12 | 17 | 0.24 |
| SU01-1240 | 40 | 40 | M12 | 27 | 0.32 |
| SU01-1250 | 50 | 40 | M12 | 37 | 0.41 |
| SU01-1630 | 30 | 50 | M16 | 12 | 0.36 |
| SU01-1640 | 40 | 50 | M16 | 22 | 0.50 |
| SU01-1650 | 50 | 50 | M16 | 32 | 0.64 |

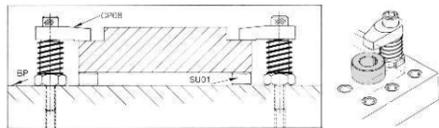


SU02


OFFSET JIG REST BUTTON



- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: use for supporting and / or positioning workpiece.
- Features: Jig rest buttons are extremely useful as supports, side locator pads, and jig feet.

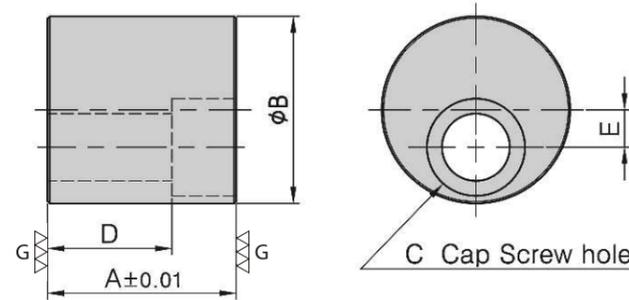


| MODEL NO. | A | B | C | D | E | kg |
|-----------|----|----|-----|----|----|------|
| SU02-1230 | 30 | 40 | M12 | 17 | 7 | 0.24 |
| SU02-1240 | 40 | 40 | M12 | 27 | 7 | 0.32 |
| SU02-1250 | 50 | 40 | M12 | 37 | 7 | 0.41 |
| SU02-1630 | 30 | 50 | M16 | 12 | 10 | 0.36 |
| SU02-1640 | 40 | 50 | M16 | 22 | 10 | 0.50 |
| SU02-1650 | 50 | 50 | M16 | 32 | 10 | 0.64 |

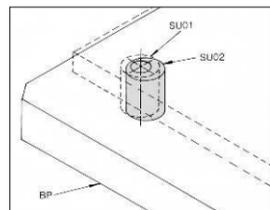


SU03

SHOULDER SUPPORT CYLINDER

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Support and locate with one part.

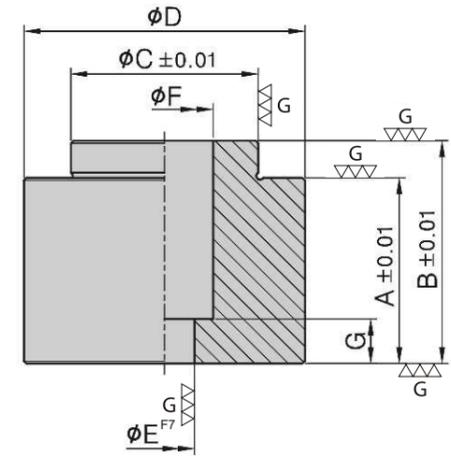

| MODEL NO. | A | B | C | D | E | F | G | Kg |
|-----------|----|----|----|----|------|------|----|------|
| SU03-1230 | 30 | 40 | 40 | 60 | φ 12 | φ 20 | 12 | 0.68 |
| SU03-1240 | 40 | 50 | 40 | 60 | φ 12 | φ 20 | 12 | 0.88 |
| SU03-1250 | 50 | 60 | 40 | 60 | φ 12 | φ 20 | 12 | 1.10 |
| SU03-1630 | 30 | 40 | 50 | 75 | φ 16 | φ 26 | 15 | 1.08 |
| SU03-1640 | 40 | 50 | 50 | 75 | φ 16 | φ 26 | 15 | 1.40 |
| SU03-1650 | 50 | 60 | 50 | 75 | φ 16 | φ 26 | 15 | 1.70 |

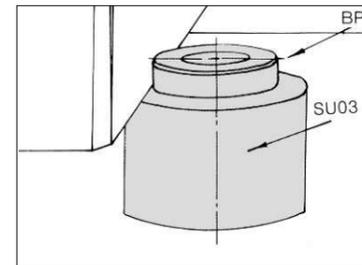


SU04


LOCATING CYLINDER



- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Support and locate with one part.

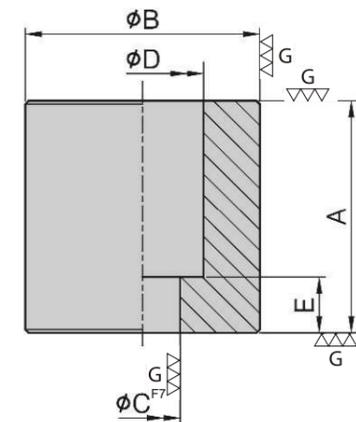

| MODEL NO. | A | B | C | D | E | kg |
|-----------|----|----|------|------|----|------|
| SU04-1230 | 30 | 40 | φ 12 | φ 20 | 12 | 0.24 |
| SU04-1240 | 40 | 40 | φ 12 | φ 20 | 12 | 0.32 |
| SU04-1250 | 50 | 40 | φ 12 | φ 20 | 12 | 0.40 |
| SU04-1630 | 30 | 50 | φ 16 | φ 26 | 12 | 0.37 |
| SU04-1640 | 40 | 50 | φ 16 | φ 26 | 15 | 0.49 |
| SU04-1650 | 50 | 50 | φ 16 | φ 26 | 15 | 0.60 |

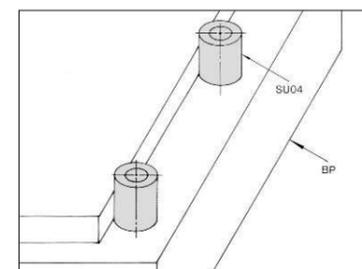





SU05

SQUARE ADAPTER

- Material / Finish:
Material: S45C, (JIS) / CK45 (DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Multipurpose adapter for a variety of stops & clamps.

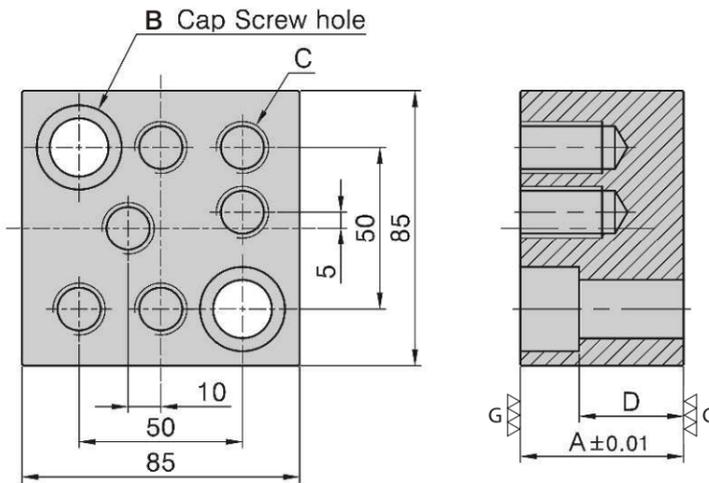


| MODEL NO. | A | B | C | D | kg |
|-----------|----|-----|-----|----|------|
| SU05-1230 | 30 | M12 | M12 | 17 | 1.50 |
| SU05-1240 | 40 | M12 | M12 | 27 | 2.00 |
| SU05-1250 | 50 | M12 | M12 | 37 | 2.25 |
| SU05-1630 | 30 | M16 | M16 | 12 | 1.30 |
| SU05-1640 | 40 | M16 | M16 | 22 | 1.80 |
| SU05-1650 | 50 | M16 | M16 | 32 | 2.22 |

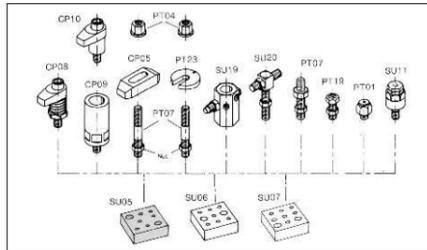


SU07

SQUARE ADAPTER

- Material / Finish:
Material :S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Multipurpose adapter for a variety of stops & clamps.

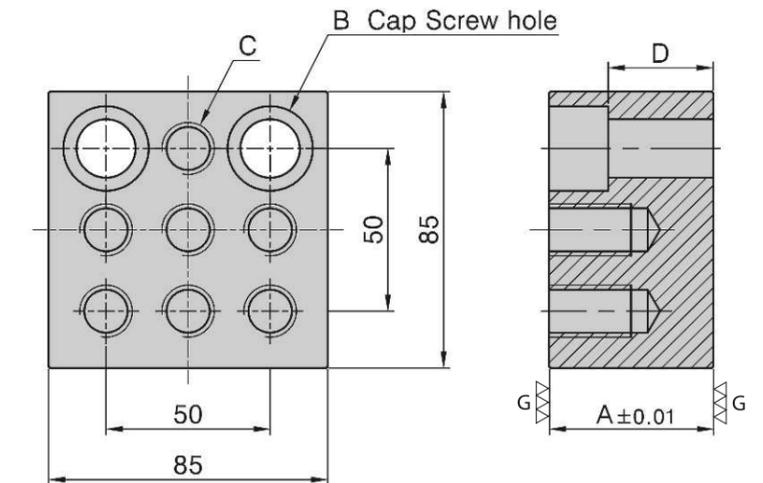


| MODEL NO. | A | B | C | D | kg |
|-----------|----|-----|-----|----|-----|
| SU07-1230 | 30 | M12 | M12 | 17 | 1.5 |
| SU07-1240 | 40 | M12 | M12 | 27 | 2.0 |
| SU07-1250 | 50 | M12 | M12 | 37 | 2.6 |
| SU07-1630 | 30 | M16 | M16 | 12 | 1.3 |
| SU07-1640 | 40 | M16 | M16 | 22 | 1.8 |
| SU07-1650 | 50 | M16 | M16 | 32 | 2.2 |

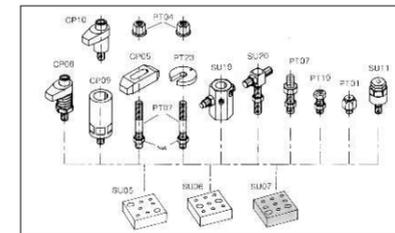


SU06

SQUARE ADAPTER

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Multipurpose adapter for a variety of stops & clamps.

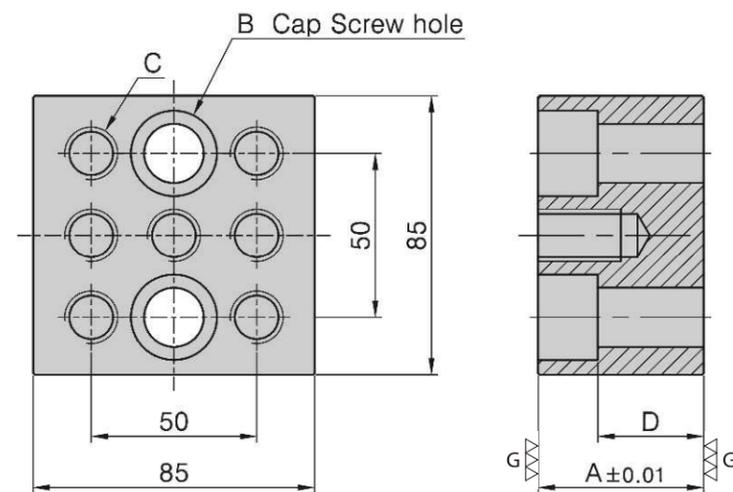


| MODEL NO. | A | B | C | D | kg |
|-----------|----|-----|-----|----|------|
| SU06-1230 | 30 | M12 | M12 | 17 | 1.50 |
| SU06-1240 | 40 | M12 | M12 | 27 | 2.00 |
| SU06-1250 | 50 | M12 | M12 | 37 | 2.60 |
| SU06-1630 | 30 | M16 | M16 | 12 | 1.30 |
| SU06-1640 | 40 | M16 | M16 | 22 | 1.80 |
| SU06-1650 | 50 | M16 | M16 | 32 | 2.25 |

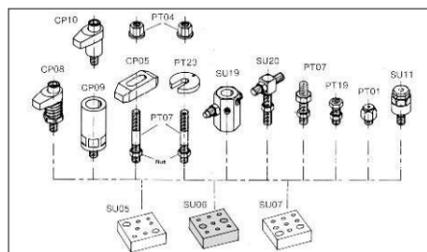


SU08

EXTENSION SUPPORT

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Gives extra flexibility in the placement of stops.

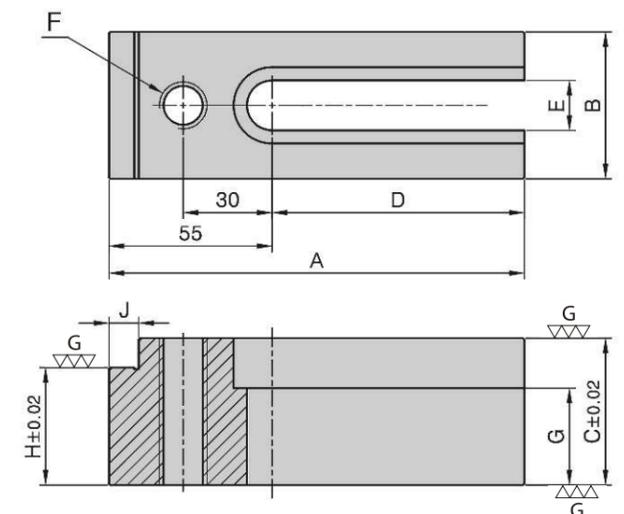

| MODEL NO. | A | B | C | D | E | F | G | H | J | kg |
|---------------|-----|----|----|----|----|-----|----|----|----|-----|
| SU08-12140-30 | 140 | 40 | 40 | 85 | 13 | M12 | 26 | 30 | 10 | 1.3 |
| SU08-16140-30 | 140 | 50 | 40 | 85 | 17 | M16 | 22 | 30 | 10 | 1.5 |
| SU08-12140-40 | 140 | 40 | 50 | 85 | 13 | M12 | 36 | 40 | 10 | 1.6 |
| SU08-16140-40 | 140 | 50 | 50 | 85 | 17 | M16 | 32 | 40 | 10 | 1.9 |

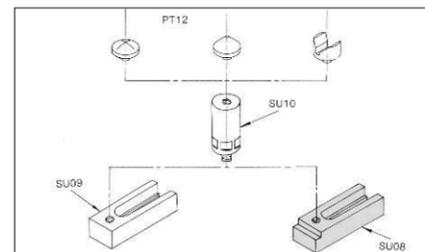





SU09

EXTENSION SUPPORT

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Multipurpose adapter for a variety of stops & clamps.

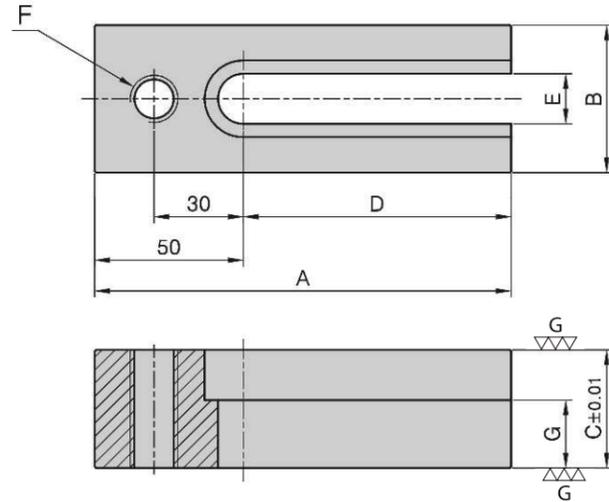


| MODEL NO. | A | B | C | D | E | F | G | kg |
|---------------|-----|----|----|----|----|-----|----|------|
| SU09-12120-30 | 120 | 40 | 30 | 70 | 13 | M12 | 16 | 0.85 |
| SU09-16140-30 | 140 | 50 | 30 | 90 | 17 | M16 | 12 | 1.14 |
| SU09-12120-40 | 120 | 40 | 40 | 70 | 13 | M12 | 26 | 1.10 |
| SU09-16140-40 | 140 | 50 | 40 | 90 | 17 | M16 | 22 | 1.52 |

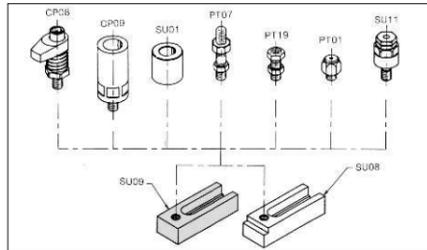


SU11

SUPPORT JACK

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 40°.
Surface finish: Black Oxide.
- Application: Multipurpose support part.

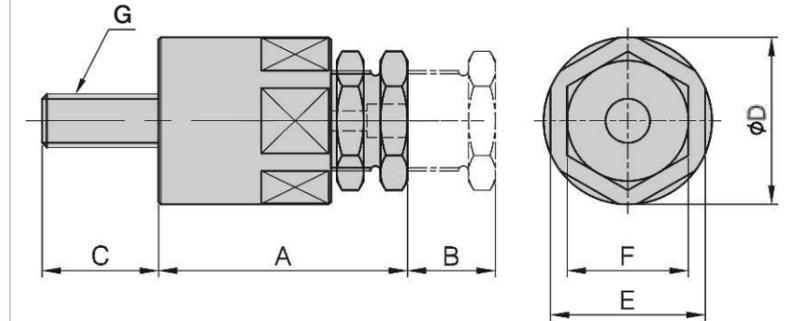


| MODEL NO. | A | B | C | D | E | F | G | kg |
|-----------|----|----|----|----|----|----|-----|------|
| SU11-1265 | 65 | 20 | 20 | 40 | 36 | 32 | M12 | 0.54 |
| SU11-1665 | 65 | 20 | 20 | 50 | 46 | 36 | M16 | 0.82 |

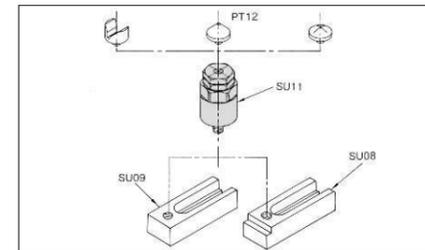


SU10

RISER CYLINDER

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 38°.
Surface finish: Black Oxide.
- Application: Elevate a work stop or clamp.

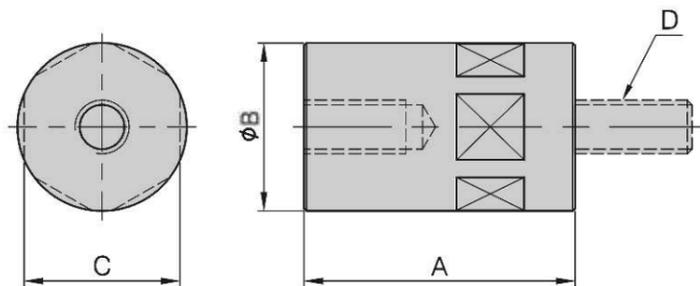


| MODEL NO. | A | B | C | D | kg |
|-----------|----|----|----|-----|------|
| SU10-1250 | 50 | 40 | 36 | M12 | 0.45 |
| SU10-1265 | 65 | 40 | 36 | M12 | 0.59 |
| SU10-1280 | 80 | 40 | 36 | M12 | 0.74 |
| SU10-1650 | 50 | 50 | 46 | M16 | 0.72 |
| SU10-1665 | 65 | 50 | 46 | M16 | 0.84 |
| SU10-1680 | 80 | 50 | 46 | M16 | 1.20 |

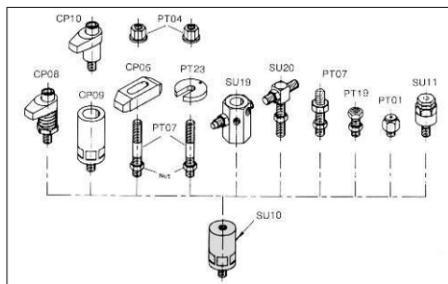


SU12

POSITIONING EDGE SUPPORT

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Work piece support & positioning.

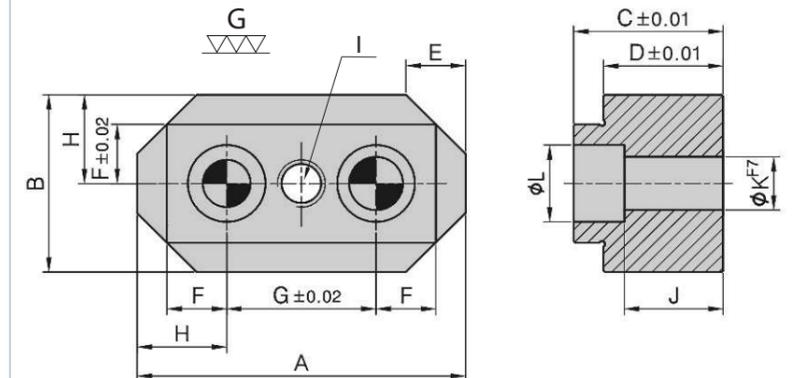

| MODEL NO. | A | B | C | D | E | F | G | H | I | J | K | L | kg |
|-----------|-----|----|----|----|----|----|----|----|-----|----|-----|----|------|
| SU12-1230 | 110 | 60 | 40 | 30 | 20 | 20 | 50 | 30 | M12 | 22 | φ12 | 20 | 1.50 |
| SU12-1240 | 110 | 60 | 50 | 40 | 20 | 20 | 50 | 30 | M12 | 32 | φ12 | 20 | 1.92 |
| SU12-1630 | 110 | 60 | 40 | 30 | 20 | 20 | 50 | 30 | M16 | 17 | φ16 | 26 | 1.40 |
| SU12-1640 | 110 | 60 | 50 | 40 | 20 | 20 | 50 | 30 | M16 | 26 | φ16 | 26 | 1.80 |


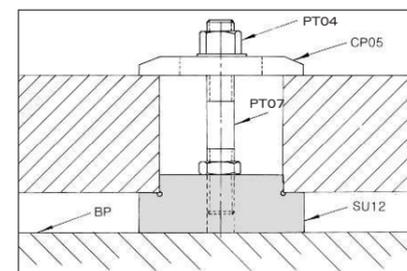




SU13

POSITIONING EDGE SUPPORT

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Multipurpose adapter for a variety of stops & clamps.

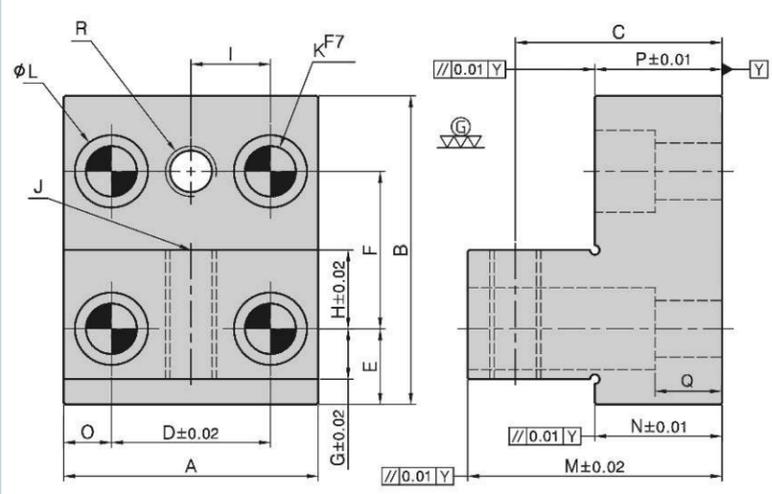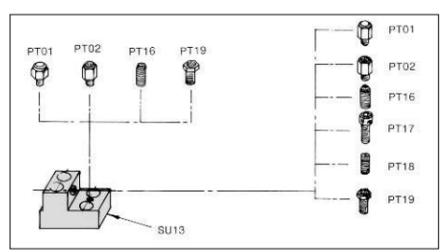

| MODEL NO. | A | B | C | D | E | F | G | H | I |
|-----------|----|----|----|----|----|----|----|----|----|
| SU13-1240 | 80 | 98 | 65 | 50 | 24 | 50 | 16 | 25 | 25 |
| SU13-1640 | 80 | 98 | 65 | 50 | 24 | 50 | 16 | 25 | 25 |



| MODEL NO. | J | K | L | M | N | O | P | Q | R | kg |
|-----------|-----|------|------|----|----|----|----|----|-----|------|
| SU13-1240 | M12 | φ 12 | φ 20 | 80 | 40 | 15 | 40 | 22 | M12 | 3.00 |
| SU13-1640 | M16 | φ 16 | φ 26 | 80 | 40 | 15 | 40 | 16 | M16 | 2.64 |



SU15

SPLIT V BLOCK

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Use with SU14 to create an adjustable V block set.

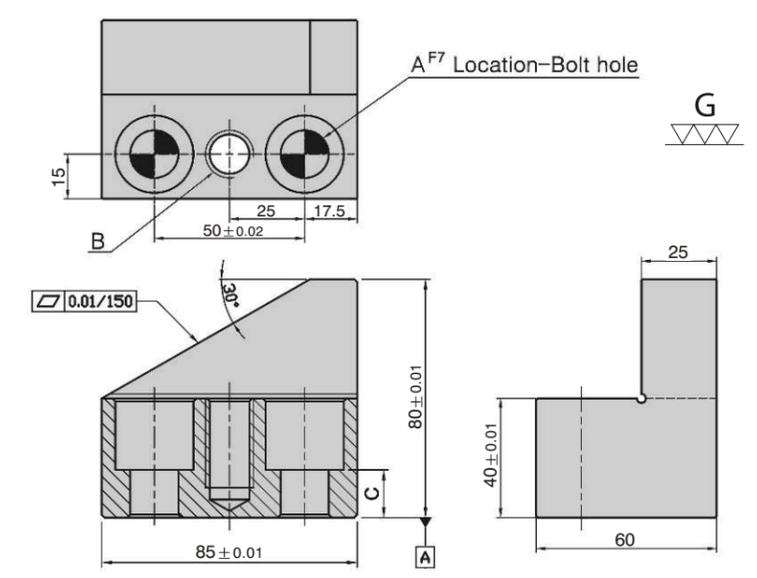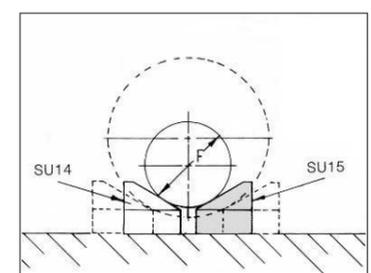



| MODEL NO. | A | B | C | F | | kg |
|---------------|------|-----|----|------|------|------|
| | | | | Max. | Min. | |
| SU15-1250-600 | φ 12 | M12 | 22 | 600 | 50 | 1.86 |
| SU15-1650-600 | φ 16 | M16 | 16 | 600 | 50 | 1.74 |



SU14

SPLIT V BLOCK

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Use with SU15 to create an adjustable V block set.

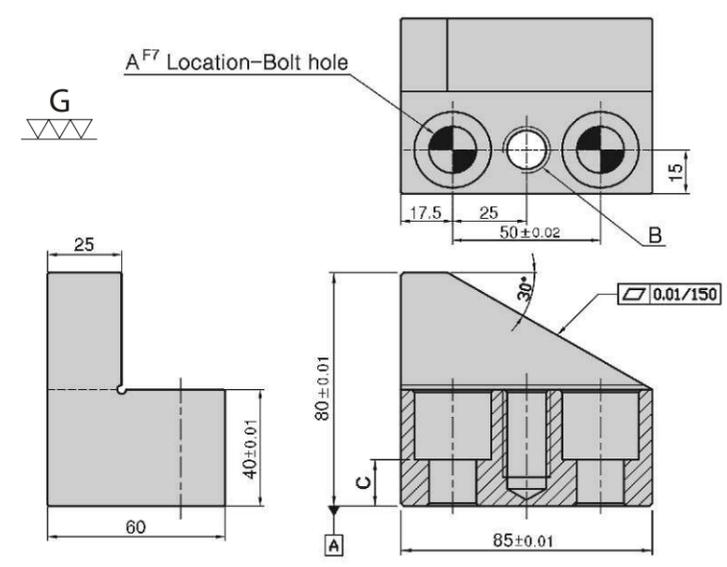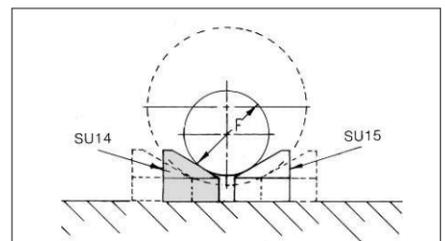



| MODEL NO. | A | B | C | F | | kg |
|---------------|------|-----|----|------|------|------|
| | | | | Max. | Min. | |
| SU14-1250-600 | φ 12 | M12 | 22 | 600 | 50 | 1.86 |
| SU14-1650-600 | φ 16 | M16 | 16 | 600 | 50 | 1.76 |



SU16

V BLOCK

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Multipurpose V-block, use independently or in pairs.

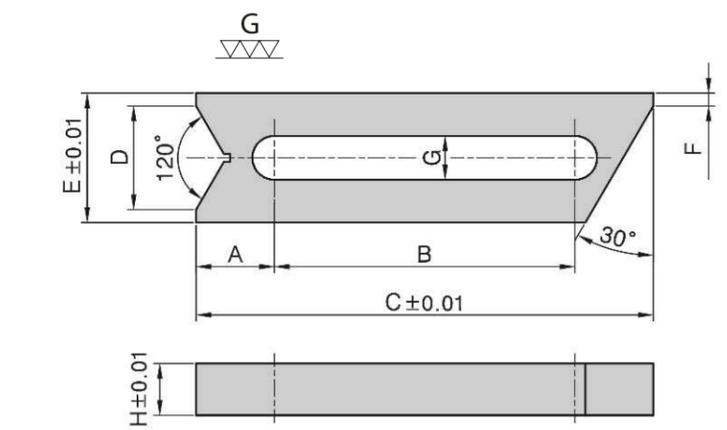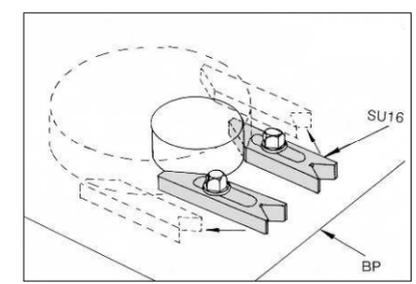


| MODEL NO. | A | B | C | D | E | F | G | H | kg |
|------------|----|-----|-----|----|----|---|----|----|------|
| SU16-12150 | 28 | 94 | 150 | 34 | 40 | 5 | 13 | 20 | 0.65 |
| SU16-16175 | 30 | 115 | 175 | 40 | 50 | 5 | 17 | 20 | 0.90 |

- BP
- BPA
- BC
- CP
- SU**
- PT
- SVF
- ALV
- OK- VISE
- OTHER
- Column for Technical Data




SU17

V BLOCK

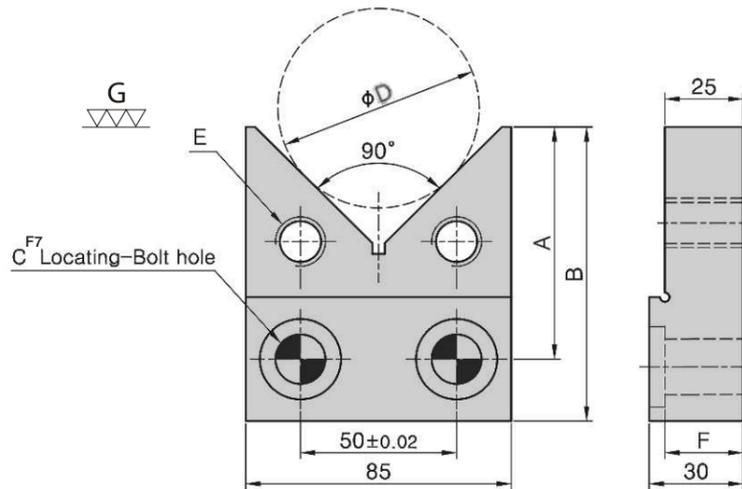


| MODEL NO. | A | B | C | D | | E | F | kg |
|---------------|----|----|------|------|------|-----|----|------|
| | | | | Max. | Min. | | | |
| SU17-1215-080 | 65 | 85 | φ 12 | 80 | 15 | M12 | 22 | 1.10 |
| SU17-1215-100 | 75 | 95 | φ 12 | 100 | 15 | M12 | 22 | 1.30 |
| SU17-1615-080 | 65 | 85 | φ 16 | 80 | 15 | M16 | 25 | 1.02 |
| SU17-1615-100 | 75 | 95 | φ 16 | 100 | 15 | M16 | 25 | 1.20 |

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 45°.
- Application: Easily mounts to any fixture to support round parts.

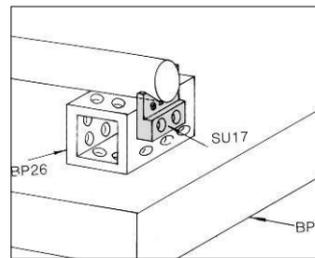


SU19

ADJUSTABLE STOP

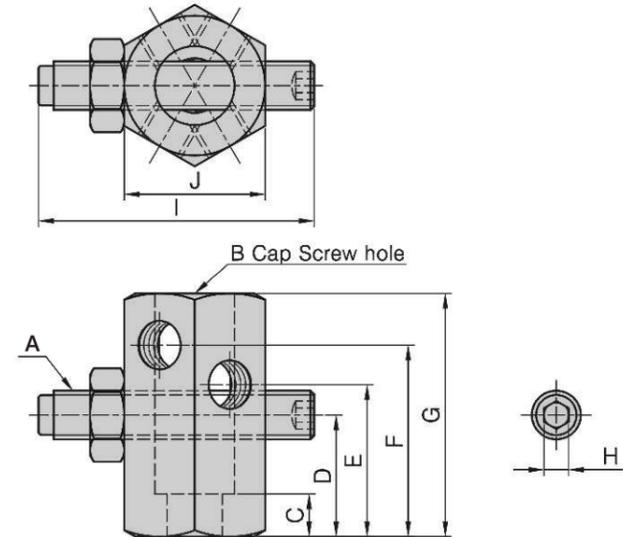


| MODEL NO. | A | B | C | D | E | F | G | H | I | J | kg |
|-----------|-----|-----|----|----|----|----|----|---|----|----|------|
| SU19-1280 | M12 | M12 | 12 | 32 | 40 | 50 | 60 | 6 | 80 | 36 | 0.43 |
| SU19-1690 | M16 | M16 | 14 | 40 | 50 | 63 | 80 | 8 | 90 | 46 | 0.89 |

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 32°~38°.
Surface finish: Black Oxide.
- Application: Multipurpose work piece positioning.




SU18

SUPPORT JACK

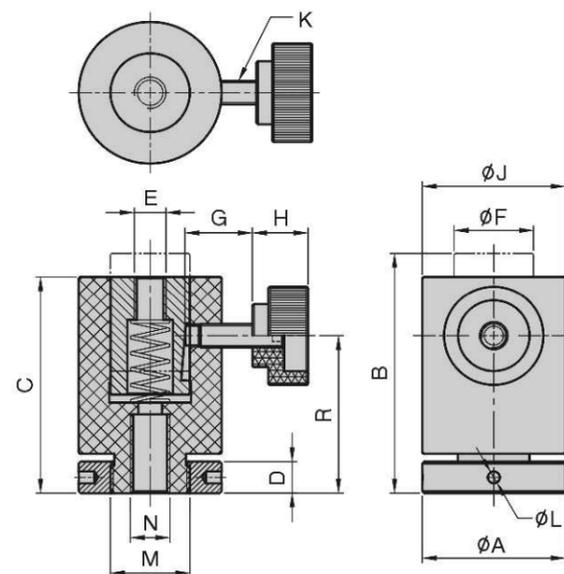


| MODEL NO. | A | B | C | D | E | F | G | H | J | K | L | M | N | R | kg |
|-----------|----|-----|----|----|-----|----|----|----|----|-----|---|-----|-----|----|------|
| SU18-3655 | 36 | 61 | 55 | 8 | M 8 | 20 | 17 | 14 | 36 | M 6 | 3 | M20 | M10 | 40 | 0.43 |
| SU18-4270 | 42 | 79 | 70 | 9 | M10 | 25 | 25 | 17 | 42 | M 8 | 4 | M24 | M12 | 50 | 0.73 |
| SU18-5085 | 50 | 100 | 87 | 10 | M12 | 30 | 27 | 20 | 50 | M10 | 5 | M30 | M16 | 62 | 1.30 |

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 38°~42°.
Surface finish: Black Oxide.
- Application: Designed to support over hanging workpiece, spring loaded & adjustable.
Features: supporting height can be adjusted by loosening the adjusting screw. Shock resistance during machining operation.




SU20

MINI ADJUSTABLE STOP

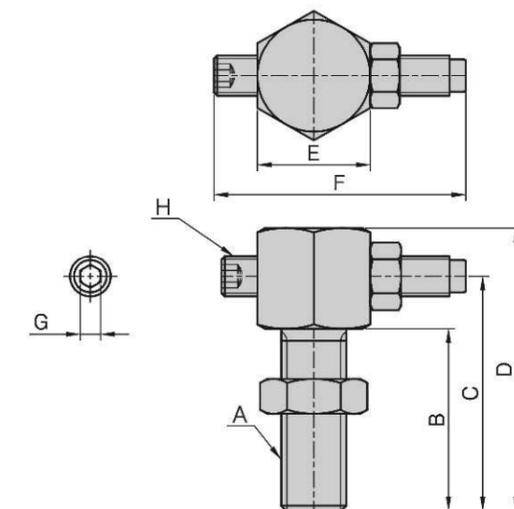

| MODEL NO. | A | B | C | D | E | F | G | H | kg |
|-----------|-----|----|----|----|----|----|---|-----|------|
| SU20-1260 | M12 | 42 | 53 | 65 | 19 | 60 | 5 | M10 | 0.13 |
| SU20-1680 | M16 | 45 | 58 | 70 | 24 | 80 | 6 | M12 | 0.24 |

- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 32°~38°.
Surface finish: Black Oxide.
- Application: Multipurpose work piece positioning.




SU21

MAGNETIC SUPPORT JACK



- Material / Finish:
Material: S45C(JIS), heat treated
Surface finish: Black Oxide.

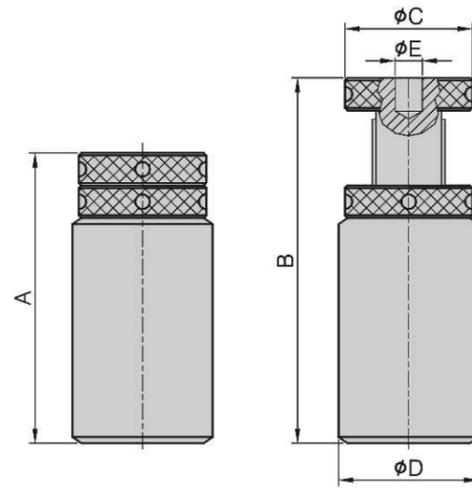


| MODEL NO. | A | B | C | D | E | kg | KN |
|-----------|-----|-----|----|----|------|------|-----|
| SU21-S050 | 40 | 50 | 35 | 40 | 11.5 | 0.34 | 72 |
| SU21-S065 | 50 | 65 | 35 | 40 | 11.5 | 0.38 | 72 |
| SU21-S085 | 65 | 85 | 40 | 45 | 11.5 | 0.50 | 135 |
| SU21-S110 | 85 | 110 | 40 | 45 | 11.5 | 0.79 | 135 |
| SU21-S165 | 110 | 165 | 45 | 50 | 11.5 | 1.50 | 135 |
| SU21-S265 | 165 | 265 | 50 | 60 | 11.5 | 3.00 | 155 |
| SU21-S300 | 200 | 300 | 50 | 60 | 11.5 | 3.50 | 155 |



- Material / Finish:
Material: S45C(JIS), heat treated
Surface finish: Black Oxide.

SU23

LARGE SUPPORT JACK

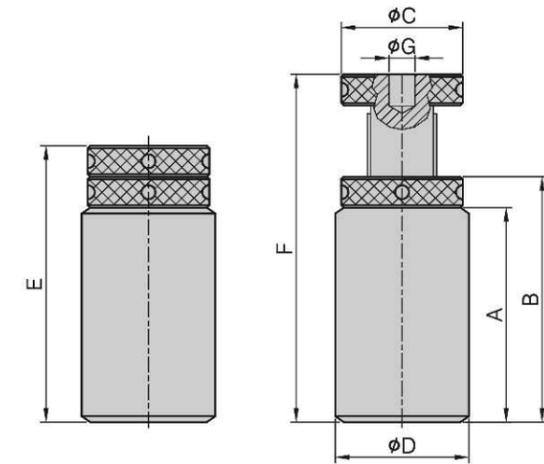


| MODEL NO. | A | B | C | D | E | F | G | kg | KN |
|------------|-----|-----|----|----|-----|------|------|------|-----|
| SU23-S0400 | 270 | 285 | 60 | 70 | 300 | 400 | 11.5 | 8.0 | 260 |
| SU23-S0500 | 370 | 385 | 60 | 70 | 400 | 500 | 11.5 | 10.5 | 260 |
| SU23-S0600 | 470 | 485 | 60 | 70 | 500 | 600 | 11.5 | 12.0 | 260 |
| SU23-S0700 | 570 | 585 | 60 | 70 | 600 | 700 | 11.5 | 14.0 | 260 |
| SU23-S0800 | 670 | 685 | 60 | 70 | 700 | 800 | 11.5 | 15.0 | 260 |
| SU23-S0900 | 770 | 785 | 60 | 70 | 800 | 900 | 11.5 | 16.5 | 260 |
| SU23-S1000 | 870 | 885 | 60 | 70 | 900 | 1000 | 11.5 | 18.0 | 260 |



- Material / Finish:
Material: S45C(JIS), heat treated
Surface finish: Black Oxide.

SU22

SUPPORT JACK

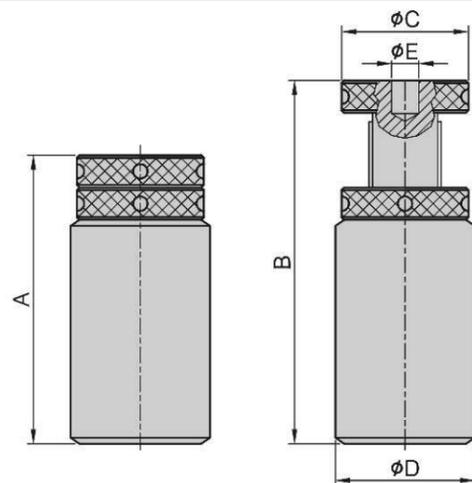



| MODEL NO. | A | B | C | D | E | kg | KN |
|-----------|-----|-----|----|----|------|------|-----|
| SU22-S050 | 37 | 50 | 35 | 40 | 11.5 | 0.29 | 72 |
| SU22-S070 | 50 | 70 | 35 | 40 | 11.5 | 0.40 | 72 |
| SU22-S100 | 70 | 100 | 40 | 45 | 11.5 | 0.72 | 135 |
| SU22-S150 | 100 | 150 | 45 | 50 | 11.5 | 1.30 | 135 |
| SU22-S250 | 150 | 250 | 50 | 60 | 11.5 | 2.90 | 155 |
| SU22-S300 | 200 | 300 | 50 | 60 | 11.5 | 3.50 | 155 |



- Material / Finish:
Material: S45C(JIS), heat treated
Surface finish: Black Oxide.
HRC: 33°

SU24

KNURLED ADJUSTING SCREW

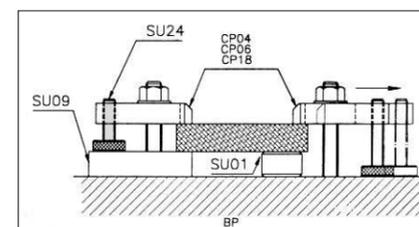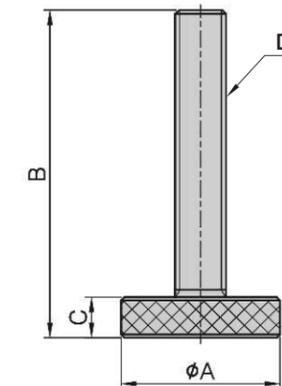

| MODEL NO. | A | B | C | D | kg |
|------------|----|-----|----|-----|------|
| SU24-12060 | 28 | 60 | 8 | M12 | 0.08 |
| SU24-14065 | 30 | 65 | 9 | M14 | 0.10 |
| SU24-16070 | 30 | 70 | 10 | M16 | 0.13 |
| SU24-18080 | 36 | 80 | 12 | M18 | 0.21 |
| SU24-20130 | 50 | 130 | 16 | M20 | 0.47 |

BP

BPA

BC

CP

SU

PT

SVF

ALV


OK-VISE

OTHER

Column for Technical Data

SU25

STEP BLOCK

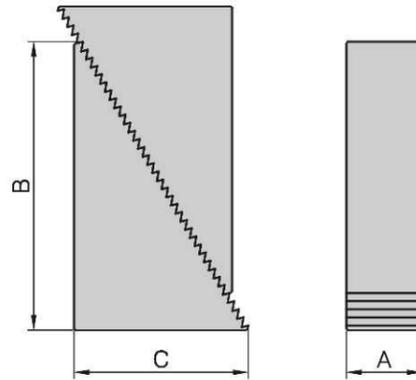


- Material / Finish:
Material: S45C.
Heat treated to HRC32°~36°.
Surface finish: Black Oxide.
- Application: Multipurpose clamping accessory, use with CP25.

| MODEL NO. | Supporting Height | A | B | C | kg |
|------------|-------------------|----|-------|----|------|
| SU25-25030 | 19-49 | 25 | 29.0 | 17 | 0.05 |
| SU25-25045 | 28-68 | | 45.0 | 27 | 0.12 |
| SU25-25097 | 58-150 | | 97.5 | 57 | 0.50 |
| SU25-32059 | 38-90 | 32 | 59.0 | 35 | 0.24 |
| SU25-32097 | 58-150 | | 97.5 | 57 | 0.62 |
| SU25-32139 | 82-210 | | 139.0 | 81 | 1.32 |
| SU25-38059 | 36-90 | 38 | 59.0 | 35 | 0.29 |
| SU25-38097 | 58-150 | | 97.5 | 57 | 0.73 |
| SU25-38139 | 82-210 | | 139.0 | 81 | 1.60 |
| SU25-50059 | 36-90 | 50 | 59.0 | 35 | 0.70 |
| SU25-50097 | 58-150 | | 97.5 | 57 | 1.66 |
| SU25-50139 | 82-210 | | 139.0 | 81 | 3.43 |

SU26

HARDENED GROUND PARALLEL

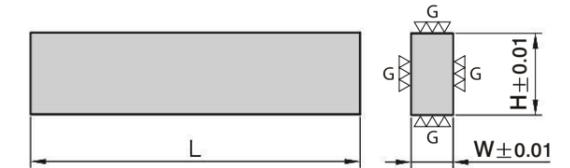

- Material: S45C,
Heat treated to HRC 45°.

| MODEL NO. | W | H | L | kg |
|---------------|----|----|-----|------|
| SU26-0812-100 | 8 | 12 | 100 | 0.18 |
| SU26-0815-100 | 8 | 15 | 100 | 0.19 |
| SU26-1015-100 | 10 | 15 | 100 | 0.24 |
| SU26-1020-100 | 10 | 20 | 100 | 0.32 |
| SU26-1025-100 | 10 | 25 | 100 | 0.22 |
| SU26-1215-100 | 12 | 15 | 100 | 0.28 |
| SU26-1220-100 | 12 | 20 | 100 | 0.19 |
| SU26-1225-100 | 12 | 25 | 100 | 0.26 |
| SU26-1620-150 | 16 | 20 | 150 | 0.38 |
| SU26-1625-150 | 16 | 25 | 150 | 0.48 |
| SU26-1630-150 | 16 | 30 | 150 | 1.14 |
| SU26-2025-200 | 20 | 25 | 200 | 1.60 |
| SU26-2030-200 | 20 | 30 | 200 | 1.92 |
| SU26-2040-200 | 20 | 40 | 200 | 2.54 |
| SU26-2530-250 | 25 | 30 | 250 | 3.00 |
| SU26-2540-250 | 25 | 40 | 250 | 3.95 |
| SU26-2550-250 | 25 | 50 | 250 | 4.90 |
| SU26-2840-300 | 28 | 40 | 300 | 5.80 |
| SU26-2850-300 | 28 | 50 | 300 | 6.66 |
| SU26-3850-300 | 38 | 50 | 300 | 9.00 |
| SU26-3875-300 | 38 | 75 | 300 | 13.8 |

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE

OTHER



Column
for
Technical
Data

SU27

ADJUSTABLE PARALLEL BLOCK



- Material / Finish:
Material: S45C(JIS) / CK45(DIN),
Heat treated to HRC 38°~42°.
Surface finish: Black Oxide.
- Application: Adjustable work piece support, fine adjustment capability.

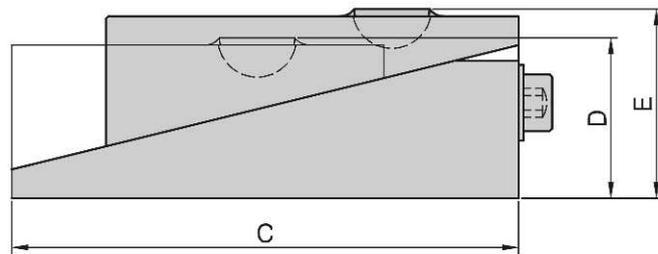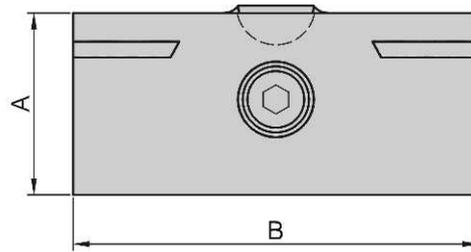

| MODEL NO. | A | B | C | D | E | kg |
|--------------|----|----|-----|----|----|-----|
| SU27-5039-46 | 39 | 50 | 82 | 35 | 41 | 1.2 |
| SU27-8052-59 | 53 | 80 | 125 | 49 | 55 | 3.4 |