

# TURNING

INDUSTRY 4.0

## contents

### Tool Selection Guide

External Holders	A4
Internal Boring Bars	A16
Negative Inserts	A22
Positive Inserts	A26
<b>Grades</b>	A28
<b>Chip Breakers</b>	A33
<b>External Toolholders</b>	
Designation System for External Toolholders	A48
External Toolholders	A51
TURN-SFEED Holders	A94
POS-S-TURN Holders	A141
TOP-RAIL Holders	A163
COOL-BURST Accessories	A164
FLEX-TURN Holders	A166
C-ADAPTER	A174
<b>Boring Bars</b>	
Designation System for Boring Bars	A195
Boring Bars	A196
HUSH-BORE	A251

## Guide to Icons



➤ Toolholder Page



➤ Insert Page




### Inserts

Designation System	A264
Negative Inserts	A266
POS-S-TURN Inserts	A306
Positive Inserts	A308
TURN-SFEED Inserts	A319
Pipe Skiving Inserts	A336
TOP-RAIL Inserts	A338
Ceramic Inserts	A341
CBN/PCD Inserts	A353
<b>Recommended Cutting Conditions</b>	<b>A366</b>


# Tool Selection Guide

## External holders




### T-Holder

























 	 TCBNR/L A120	 TCKNR/L A120	 TCLNR/L A121 TCLNR/L-TB A122	 TXJNR/L A138 TXJNR/L-TB A139	 TXQNR/L A140
	 TDJNR/L A123	 TDJNR/L-TB A124	 TDNNR/L A125	 TDQNR/L A126	 TDUNR/L A126
	 TTFNR/L A130	 TTGNR/L A130	 TTJNR/L A130	 TTQNR/L(-TB) A131	
	 TSDNN A128	 TSKNR/L A129	 TSSNR/L A129		
 	 TVJNR/L A132	 TVJNR/L-TB A133	 TVQNR/L A134	 TVVNN A135	
 	 TZQNR/L A141	 TZQNR/L-TB A141	 TZXNN A142	 TZXNN-TB A142	
	 TWLNR/L A136	 TWLNR/L-TB A137			 THSNR/L A127

# Tool Selection Guide

## External holders




**P** Lever lock

	 PCBNR/L A69	 PCKNR/L A70	 PCLNR/L A71	 PCLNR/L-TB A71
	 PDJNR/L A72	 PDJNR/L-TB A72	 PDNNR/L A73	
	 PTFNR/L A79	 PTGNR/L A80	 PTTNR/L A80	
	 PSBNR/L A77	 PSDNN A77	 PSKNR/L A78	 PSSNR/L A78
	 PWLNR/L-TB A81			
	 PRDCN A74	 PRGCR/L A75	 PRGNR/L A76	

# Tool Selection Guide

## External holders




**S** Screw clamp

























80°				
	SCACR/L-SH A82	SCACR/L-SH-TB A82	SCLCR/L-SH A83	SCLCR/L-SH-TB A83
80°				
	SCLCR/L A84	SCLNR/L-RS A85 (0703)	SCLNR/L A85 (0703)	SCLNR-RS (-TB) A86 (0904)
55°				
	SDJCR/L-SH A87	SDJCR/L-SH-TB A87	SDJCR/L A88	SDJNR/L-RS A89
55°				
	SDJNR/L A89	SDJNR-RS A90 (1305)	SDJNR-RS-TB A90 (1305)	SDNCN-SH A91
55°				
	SDNCN-SH-TB A91	SDNCN A92	SDQNR/L A93	
60°				
	STFCR/L A98	STGCR/L-SH A99	STGCR/L-SH-TB A99	STGCR/L A100
60°				
	STGNR-RS A101 (1304)			

# Tool Selection Guide

## External holders




**S** Screw clamp

				
	SVJBR/L-SH A102	SVJBR/L-SH-TB A102	SVJBR/L A103	SVJBR/L-TB A103
				
	SVJCR/L-SH A104	SVJCR/L-SH-TB A104	SVJCR/L A105	SVJNR-RS A106
				
SVJNR-RS-TB A106	SVJNR/L A107	SVPBR/L A108	SVVBN-SH A109	
				
	SSDCN A97	SSSCR/L A97		
				
SRDCN A95	SRGCR/L A96	SRGCR/L-TB A96		
				
SFXCN A94			SWLNR/L-RS A111	SWLNR/L A111

# Tool Selection Guide

## External holders




**TM...** Miniature tool holder (Screw clamp)

<b>TMB</b> Back turning holders				TMB-SVXCR A112    TMB-SVXCR-TB A112		
			TMS-SCLCL A113			
<b>TMS</b> Sleeve holders						TMS-SDUCL A114    TMS-SDUCR/L-TB A114    TMS-SDUNL A115    TMS-SDUNL-TB A115
				TMS-SVUBL A116    TMS-SVUBR/L-TB A116		
<b>TMY</b> Y-axis holders				TMY-SDJCR A117    TMY-SDJCR-TB A117		
				TMY-SVJBR A118    TMY-SVJBR-TB A118		
<b>TMZ</b> Shift holders					TMZ-SDJCR A119    TMZ-SVLBR A119	

# Tool Selection Guide

## External holders




### QE Modular head (Screw clamp)













<b>QE1</b> External turning modular head					
		QE1 SDJCR A166	QE1 SDJCR-TB A166	QE1 SDJNR A167	QE1 SDJNR-TB A167
		QE1 SVJBR A168	QE1 SVJBR-TB A168	QE1 SVJCR A169	QE1 SVJCR-TB A169
<b>QE1B</b> Back turning modular head					
		QE1B SVXCR A170	QE1B SVXCR-TB A170		
<b>QE1Y</b> Y-axis modular head					
		QE1Y SDJCR A171	QE1Y SDJCR-TB A171		

# Tool Selection Guide

## External holders




**M** Multi lock

























	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   <b>MDJNR/L A63</b> </div> <div style="text-align: center;">   <b>MDNNN A63</b> </div> <div style="text-align: center;">   <b>MDQNR/L A64</b> </div> </div>
	<div style="text-align: center;">   <b>MTJNR/L A65</b> </div>
	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   <b>MVJNR/L A66</b> </div> <div style="text-align: center;">   <b>MVQNR/L A66</b> </div> <div style="text-align: center;">   <b>MNVNN A67</b> </div> </div>
	<div style="text-align: center;">   <b>MWLNR/L A68</b> </div>

# Tool Selection Guide

## External holders




### H Hook lever holder














	 HCLNR/L-RS A55	 HCLNR/L A55		
	 HDJNR/L A56	 HDNRR/L A56	 HDQNR/L A57	 HDUNR/L A57
	 HTFNR/L A59	 HTGNR/L A59		
	 HSBNR/L A58	 HSDNN A58		
	 HVJNR/L A60	 HVQNR/L A60	 HVVNN A61	
	 HVJNR/L A60	 HVQNR/L A60	 HVVNN A61	
	 HwLNR/L A62			


# Tool Selection Guide

## External holders








### C Top clamp

	 <p>CTCPN A53</p>	 <p>CTFPR/L A53</p>	 <p>CTGPR/L A54</p>
	 <p>CSDPN A52</p>		
	 <p>CKJNR/L A51</p>	 <p>CKNNR/L A51</p>	
	 <p>CRDCN-120 A145 CRDCN-140 A145</p>	 <p>CRDCN-T A146 CRDCR-T A146</p>	 <p>CRGCR/L-120 A147 CRGCR/L-140 A147</p>




### W Wedge clamp










	 <p>WTENN A143</p>	 <p>WTGNR/L A143</p>	 <p>WTJNR/L A144</p>	 <p>WTQNR/L A144</p>


# Tool Selection Guide

## External holders








### T-CH CH dimple holder

	 TCBNR/L-CH A149	 TCKNR/L-CH A149	 TCLNR/L-CH A150
	 TDJNR/L-CH A151	 TDNNN-CH A151	
	 TSSNR/L-CH A152		




### T-DA DA dimple holder


















	 TCLNR-DA A153		
	 TSDNN-DA A154	 TSKNR-DA A154	

# Tool Selection Guide

## External holders




### T-F Flat T-Holder





























	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">             TCLNR/L-F A155         </div> <div style="text-align: center;">             CCLNR/L-F A148         </div> </div>
	<div style="text-align: center;">             TDJNR/L-F A156         </div>
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">             TSDNN-F A159         </div> <div style="text-align: center;">             TSKNR/L-F A159         </div> <div style="text-align: center;">             TSRNR/L-F A160         </div> <div style="text-align: center;">             TSSNR/L-F A160         </div> </div>
	<div style="text-align: center;">             TTJNR/L-F A161         </div>
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">             TRDNN-F A158         </div> <div style="text-align: center;">             TRGNR/L-F A158         </div> </div>
	<div style="text-align: center;">             TEGnr/L-F A157         </div>

# Tool Selection Guide

## External holders




### C C-Adapter

	 C...HCLNR/L A176	 C...TCLNR/L A178	 C...SCLCR/L A183
	 C...HDJNR/L A176	 C...TDJNR/L A178	 C...SDJCR/L A183
	 C...HTGNR/L A177  C...HTJNR/L A177	 C...TTGNR/L A180  C...TTJNR/L A180	 C...STGCR/L A184  C...STJCR/L A184
	 C...HSSNR/L A177	 C...TSDNN A179	 C...TSSNR/L A179
	 C...TVJNR/L A180	 C...SVJBR/L A185	 C...SVVBN A185
	 C...TZQNR/L-TB A182		 C...TWLNR/L A181
	 C...SRDCN A184		

# Tool Selection Guide

## Internal boring bars




**S** Screw clamp












	S-SCLCR/L A212 C-SCLCR/L A213	S-SCLNR/L A214 A-SCLNR/L A214	S-SCLPR/L A215 A-SCLPR/L A215	E-SCLPR/L A216
	A-SDLNR/L A216	S-SDQCR/L A217	A-SDQNR/L A217	S-SDUCR/L A218
A-SDUNR/L A218	S-SDZCR/L A219			
	S-STFCR/L A221 C-STFCR/L A221	S-STFNR/L A222 A-STFNR/L A222	S-STFPR/L A223 A-STFPR/L A223	C-STFPR/L A224 E-STFPR/L A224
	S-STUBR/L A225 C-STUBR/L A225	S-STUNR/L A226 A-STUNR/L A226	C-STZBR/L A227	
	S-SVJBR/L A228 S-SVJCR/L A228	S-SVJPR/L A229	A-SVLNR/L A229	S-SVPBR/L A230 S-SVPCR/L A230
	A-SVPCR/L A231	S-SVQBR/L A232 S-SVQCR/L A232	S-SVUBR/L A233 S-SVUCR/L A233	


# Tool Selection Guide

## Internal boring bars









### S Screw clamp

	 <p>S-SSKCR/L A220</p>		 <p>A-SXQNR/L A236</p>	 <p>A-SXUNR/L A236</p>
	 <p>A-SVLNR/L A229</p>	 <p>A-SVPCR/L A231</p>		
	 <p>S-SWLNRL A234</p> <p>A-SWLNRL A234</p>	 <p>S-SWUBRL A235</p> <p>C-SWUBRL A235</p>		




### C Top clamp














	 <p>S-CSKPR/L A197</p>
	 <p>S-CTFCR/L A198</p> <p>S-CTFPR/L A198</p>
	 <p>S-CKUNR/L A196</p>


# Tool Selection Guide

## Internal boring bars





### H Hook lever holder

	 <p>S-HCLNR/L A199 A-HCLNR/L A199</p>
	 <p>A-HXUNR/L A206</p>
	   <p>S-HDQNR/L A200      S-HDUNR/L A201      S-HDZNR/L A202 A-HDUNR/L A201      A-HDZNR/L A202</p>
	  <p>S-HTFNR/L A203      S-HTUNR/L A204 A-HTFNR/L A203      A-HTUNR/L A204</p>
	 <p>S-HWLNRL A205 A-HWLNRL A205</p>




### M Multi lock



















	 <p>S-MWLNRL A207</p>
---	--

# Tool Selection Guide

## Internal boring bars




### T Holder










	 S-TCLNR/L A237 A-TCLNR/L A238	 A-TCLNR/L-TB A239
	 A-TXQNR/L A247	 A-TXUNR/L A247
	 S-TDUNR/L A240 A-TDUNR/L A240	 S-TDZNR/L A241 A-TDZNR/L A241
	 S-TSKNR/L A243 A-TSKNR/L A243	
	 S-TTFNR/L A244 A-TTFNR/L A244	 S-TTUNR/L A245 A-TTUNR/L A245
	 S-TWLNRL A246 A-TWLNRL A246	
	 A-THSNR/L A242	


# Tool Selection Guide

## Internal boring bars





### **P** Lever lock

	 <p>S-PCLNR/L A208</p>
	 <p>S-PSKNR/L A210</p>
	  <p>S-PDUNR/L A209      S-PDZNR/L A209</p>
	 <p>S-PTFNR/L A211</p>




### **W** Wedge clamp

	 <p>S-WTFNR/L A248</p>

# Tool Selection Guide


## Internal boring bars



**T-CH** CH dimple holder



S-TCLNR/L-CH A249



**QH** Modular head



QH-SCLCR/L A255



QH-SCLNR/L A256



QH-HCLNR/L A253



QH-SXUNR/L A262



QH-HDUNR/L A254



QH-SDUCR/L A257



QH-SDUNR/L A258



QH-HVUNR/L A254



QH-SVUBR/L A260
















QH-STFCR/L A259
















QH-SWLNRL A261

# Tool Selection Guide














## Negative inserts














		<i>T-TURN</i>				
Application	Super finishing			Finishing		
Chip breaker	FA	EA	FS	FLP	FG	
Insert						
Material	P	M S	P	P	P	
<b>C</b> 	• A269	• A268	• A270	• A270	• A270	
<b>D</b> 	• A277	• A277	• A278	• A278	• A278	
<b>S</b> 		• A286			• A287	
<b>T</b> 		• A292	• A293	• A293	• A293	
<b>V</b> 	• A297	• A297	• A299	• A298	• A298 A299	
<b>W</b> 		• A300	• A303	• A301	• A300 A303	
<b>X</b> 				• A305		
<b>Y</b> 			• A305			

		<i>T-TURN</i>				
Application	Finishing				Medium	
Chip breaker	SF	FX	FC	FM	MLP	
Insert						
Material	P M	P	P M	P	P	
<b>C</b> 	• A273		• A269	• A270	• A271	
<b>D</b> 			• A277	• A278	• A279	
<b>S</b> 			• A287	• A287		
<b>T</b> 	• A296		• A293	• A293	• A295	
<b>V</b> 		• A298 A299	• A297	• A299		
<b>W</b> 			• A300	• A303	• A301	
<b>X</b> 					• A305	
<b>Y</b> 						

# Tool Selection Guide















## Negative inserts















<b>T-TURN</b>					
Application	Medium				
Chip breaker	MC	FT	VF	MGS	ML
Insert					
Material	<b>P</b>	<b>P</b>	<b>P M</b>	<b>S</b>	<b>P M S</b>
C	 A271	• A270		• A271	• A266 A271
D	 A279	• A278	• A281	• A279	• A276 A279
R					
S	 A288			• A288	• A288
T	 A294	• A294	• A296		• A294
V					• A297 A298
W	 A301			• A301	• A301
Y					

<b>T-TURN</b>					
Application	Medium				
Chip breaker	MP	EM	MK	MM	MGP
Insert					
Material	<b>M S</b>	<b>M S</b>	<b>M S</b>	<b>P M</b>	<b>P</b>
C	 A271	• A269	• A271	• A271	• A271
D	 A280	• A277	• A279	• A279	• A279
R					
S	 A288	• A286 A287	• A288	• A288	• A288
T	 A295	• A292	• A294	• A295	• A294
V		• A297	• A299		• A298
W	 A301	• A300 A303	• A304	• A304	• A301
Y					

# Tool Selection Guide




























## Negative inserts

		<i>T-TURN</i>					
Application		Medium			Roughing		
Chip breaker		PC	MT	MG-	ET	RGP	RT
Insert							
Material		P	P M K	P K	M S	P	P M K
C 		• A272	• A272	• A268	• A269	• A272	• A273
D 		• A280	• A280	• A276	• A277		• A280
R 				• A283			
S 		• A289	• A288 A289	• A286	• A287		• A288
T 		• A295 A296	• A295	• A291 A292	• A293		• A296
V 		• A298 A299	• A298 A299	• A297			
W 		• A302 A304	• A302 A304		• A300	• A302	• A302
Y 							

		<i>T-TURN</i>					
Application		Roughing					
Chip breaker		KT	RX	RH	EH	HT	HD
Insert							
Material		K	P	P	M	P	P
C 		• A270	• A275	• A275	• A274	• A267 A274	• A267
D 		• A278	• A281				
R 							
S 		• A287	• A290	• A290	• A289	• A285 A289	• A284
T 		• A294	• A296	• A296			
V 							
W 		• A301					
Y 							

# Tool Selection Guide














## Negative inserts














		<b>T-TURN</b>					
Application	Roughing		Finishing wiper		Medium wiper	Medium	
Chip breaker	HY	HZ	WS	WA	WT	GU	
Insert							
Material	<b>P</b>	<b>P</b>	<b>P M K</b>	<b>P K</b>	<b>P M K S</b>	<b>P K</b>	
C	 A267 A274	 A267 A274	 A273	 A273	 A266 A273		
D			 A281	 A281	 A281		
H						 A282	
S	 A285 A290	 A285 A290					
T				 A296			
V							
W			 A302	 A304	 A303		
Y							

		<b>T-TURN</b>			<b>POSSTURN</b>		
Application	Medium	Roughing	Medium	Finishing / Medium			
Chip breaker	SU	KNUX	DNUX	TNMV	XNMV	ZNMV	
Insert							
Material	<b>P M</b>	<b>S P M</b>	<b>P M</b>	<b>P M</b>	<b>P K S</b>	<b>S P S</b>	
C							
D			 A281				
H	 A282						
K		 A282					
T				 A306			
V							
X					 A306		
Z						 A307	

# Tool Selection Guide















## Positive inserts














		<i>T-TURN</i>				
Application	Super finishing	Finishing			Medium	
Chip breaker	FA	FG	FX	PC	FM	
Insert						
Material	P M	P M S	P	P M S	P M	
C 	• A312	• A312 A313		• A312 A313	• A312 A313	
D 	• A317	• A317		• A317	• A317	
R 				• A320		
S 		• A321		• A321	• A321	
T 	• A325 A328	• A325 A328		• A325 A328	• A325 A328	
V 	• A331	• A331	• A331	• A331 A333	• A331 A333	
W 						
F 						

		<i>T-TURN</i>				
Application	Medium		Medium wiper	Roughing		
Chip breaker	MT	MGS	WT	PMR-	RA	
Insert						
Material	P M K	M S	P M K	P M K S	P	
C 	• A312		• A312			
D 	• A317					
R 	• A320	• A320			• A320	
S 	• A321			• A322		
T 	• A325			• A328		
V 	• A331					
W 						
F 						

# Tool Selection Guide

## Positive inserts

		<i>T-TURN</i>					
Application		Roughing		Finishing			
Chip breaker		CMX-	FF	GF	GW	FGS	FCMX
Insert							
Material		P	P M S	P M S	P M S	S	P
C			• A310	• A309	• A309		
D			• A315 A318	• A314 A318	• A314		
R		• A320					
S							
T			• A323 A326	• A324 A326			
V			• A330 A334	• A330 A334	• A330	• A331	
W			• A335				
F							• A319


		<i>T-TURN</i>					
Application		Finishing					
Chip breaker		SL	SA	SM	SH	FL	
Insert							
Material		P M S	P M S	P M S	P M S	M N S	
C		• A311	• A310	• A311	• A311	• A310	
D		• A316	• A315	• A316	• A316	• A315	
R						• A320	
S						• A321	
T			• A324			• A324	
V		• A330 A332	• A330 A332	• A330 A332		• A332	
W							
F							

# Grades

## Selection guide for turning grades


For steel ( *SPEED RUSH* - CVD coated)

Cutting speed

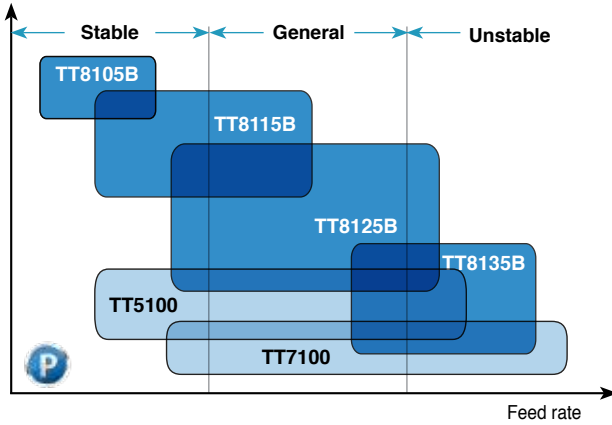

For stainless steel (CVD coated & PVD coated)

Cutting speed

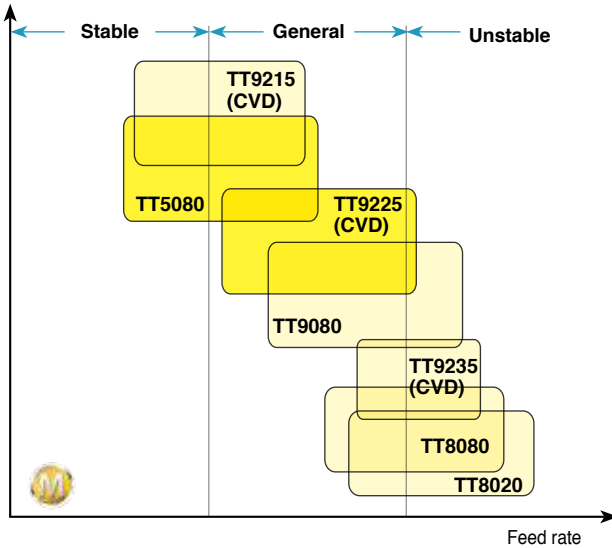


# Grades

## Selection guide for turning grades


### For cast iron (CVD coated)

Cutting speed

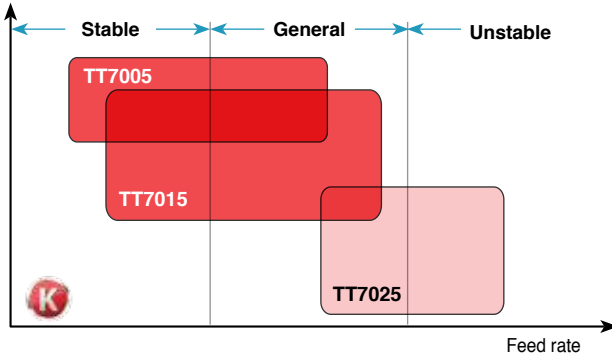


### For super alloys (CVD & PVD coated)

Cutting speed

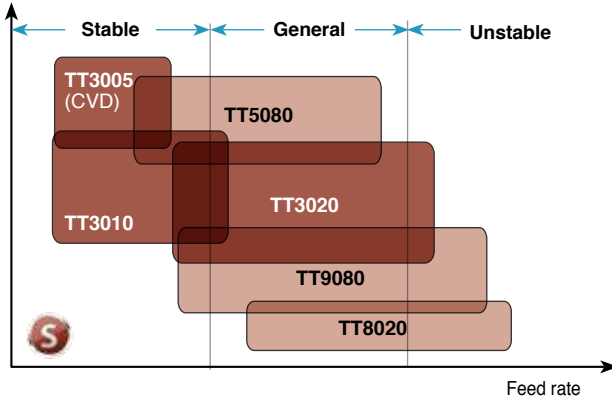

### For small parts machining (PVD coated)

Cutting speed

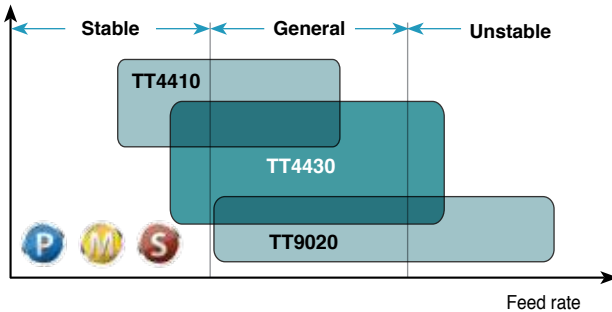

# Grades

## Carbide grades

Grades	ISO	Characteristics & applications
<b>TT7005</b> CVD coated	<b>K05 – K15</b>	• High speed turning of gray cast iron in continuous conditions
<b>TT7015</b> CVD coated	<b>K10 – K25</b>	• General turning of gray and ductile cast iron in continuous and interrupted conditions
<b>TT7025</b> CVD coated	<b>K20 – K35</b>	• Interrupted turning of gray and ductile cast iron especially good in ductile cast iron
<b>TT8105B</b> CVD coated	<b>P05 – P15</b>	• High speed turning of steel in continuous conditions
<b>TT8115B</b> CVD coated	<b>P05 – P20</b>	• General turning of steel in high speed conditions
<b>TT3005</b> CVD coated	<b>S05 – S15</b>	• Finish turning of heat resistant super alloys in high speed and low depth of conditions
<b>TT9215</b> CVD coated	<b>M05 – M20</b> <b>S05 – S20</b>	• High speed turning of stainless steel and heat resistant super alloys in continuous conditions
<b>TT4410</b> PVD coated	<b>M05 – M25</b> <b>P05 – P25</b> <b>S05 – S25</b>	• High speed turning of small parts for stainless steel, steel and titanium alloys in continuous conditions
<b>TT3010</b> PVD coated	<b>S05 – S20</b>	• High speed turning of heat resistant super alloys in continuous conditions
<b>TT5080</b> PVD coated	<b>M05 – M25</b> <b>S05 – S25</b>	• Wide range of turning for stainless steel and heat resistant super alloy
<b>TT3020</b> PVD coated	<b>S10 – S30</b>	• General turning of heat resistant super alloy
<b>TT8125B</b> CVD coated	<b>P15 – P30</b>	• General turning of steel in wide range of conditions
<b>TT5100</b> CVD coated	<b>P20 – P35</b> <b>M20 – M35</b>	• Wide range of turning for mild steel, low carbon steel, low carbon alloy steel and stainless steel
<b>TT9225</b> CVD coated	<b>M15 – M30</b> <b>S15 – S30</b>	• General turning of stainless steel and heat resistant super alloy
<b>TT9020</b> PVD coated	<b>P20 – P40</b> <b>M20 – M40</b>	• General turning of small parts for steel and stainless steel

# Grades

## Carbide grades

Grades	ISO	Characteristics & applications
<b>TT4430</b> PVD coated	M20 – M40 P20 – P40 S20 – S40	• General turning of small parts for stainless steel, steel and titanium alloy
<b>TT9080</b> PVD coated	M20 – M40 P20 – P40 S20 – S40	• General turning of stainless steel, steel and heat resistant super alloy
<b>TT8135B</b> CVD coated	P25 – P40	• Interrupted turning of steel in low speed conditions
<b>TT7100</b> CVD coated	P30 – P45	• Heavy interrupted turning of steel
<b>TT9235</b> CVD coated	M25 – M40 S25 – S40	• Interrupted turning of stainless steel and heat resistant super alloy in low speed conditions
<b>TT8080</b> PVD coated	M30 – M50 P30 – P50 S30 – S50	• Interrupted and rough turning of stainless steel and steel • Interrupted turning of heat resistant super alloys in low speed conditions
<b>TT8020</b> PVD coated	M30 – M50 P30 – P50 S30 – S50	• Low speed turning of stainless steel, heat resistant super alloys and low carbon steel
<b>PV3010</b> Cermet PVD coated	P05 – P20 M05 – M20 K05 – K20	• Good surface finish turning of steel, stainless steel and cast iron in high speed conditions
<b>CT3000</b> Cermet uncoated	P10 – P20 M10 – M20 K10 – K20	• Excellent surface finish turning of steel, stainless steel and cast iron
<b>K10</b> Carbide	K05 – K15 N05 – N15 S05 – S15	• General turning of cast iron, non-ferrous materials of aluminum and titanium alloy

# Grades












## CBN, PCD, Ceramic grades

Grades	ISO	Characteristics & applications
<b>TB610</b> CBN	H05 – H10	• High speed continuous turning of hardened steel
<b>TB2015</b> CBN	H10 – H20	• Light interrupted turning of hardened steel
<b>TB650</b> CBN	H10 – H20	• General turning of hardened steel
<b>TB670</b> CBN	H20 – H30	• Medium interrupted turning of hardened steel
<b>TB7015</b> CBN	H25 – H35 K10 – K20	• High speed turning of cast iron and general turning of carbide roll
<b>TB7020</b> Solid CBN	K10 – K25	• High speed and light interrupted turning of cast iron. Solid CBN insert
<b>TB730</b> CBN	K05 – K10 P10 – P20	• General turning of sintered or powder metals
<b>AW120</b> Ceramic, Al <sub>2</sub> O <sub>3</sub> +ZrO <sub>2</sub>	K05 – K15	• High speed continuous turning of white cast iron
<b>AB2010</b> Ceramic, PVD coated	H05 – H10	• High speed finish turning of hardened steel
<b>AB20</b> Ceramic, Al <sub>2</sub> O <sub>3</sub>	H05 – H15	• Continuous and finish turning of hardened steel
<b>AB30</b> Ceramic, Al <sub>2</sub> O <sub>3</sub>	H10 – H15 K05 – K15	• General turning of hardened steel under HRC 55 and cast iron
<b>TC430</b> Ceramic, Whisker	S05 – S15	• High speed turning of super alloys especially for Ni-based super alloy
<b>TC3020</b> Ceramic, SiAlON	S15 – S25	• General turning and milling of super alloy
<b>TC3030</b> Ceramic, SiAlON	S25 – S35	• Rough turning and milling of super alloy
<b>AS500</b> Ceramic, SiAlON	K15 – K25	• General and light interrupted turning of gray cast iron
<b>SC10</b> Ceramic CVD coated	K25 – K35	• General turning of ductile cast iron
<b>AS10</b> Ceramic, Si <sub>3</sub> N <sub>4</sub>	K25 – K35	• Interrupted turning of gray cast iron
<b>TD810</b> PCD	N05 – N15	• Bi-modal composition for high speed turning of non-ferrous materials, high Si aluminum alloy, ceramic and sintered tungsten carbide
<b>KP300</b> PCD	N10 – N25	• General turning of non-ferrous materials and finish turning of carbide roll
<b>TD830</b> PCD	N20 – N35	• Low Si aluminum alloys and composite plastics (CFRP, GFRP)








# Recommendations for Chip Breakers

## ISO Negative inserts








### For steel

	← Stable  Unstable →
Finishing	   
Medium	   
Roughing	 






### For stainless steel

	← Stable  Unstable →
Finishing	
Medium	   
Roughing	




### For super alloys

	← Stable  Unstable →
Finishing	
Medium	   
Roughing	

### For cast iron

	← Stable  Unstable →
Finishing	
Medium	 
Roughing	 

### For aluminum

	← Stable  Unstable →
Finishing	
Medium	 
Roughing	

# Recommendations for Chip Breakers

## RHINO-TURN Negative inserts

### For steel

Finishing	
Medium	
Roughing	

### For stainless steel

Finishing	
Medium	
Roughing	

### For super alloys

Finishing	
Medium	
Roughing	

### For cast iron

Finishing	
Medium	
Roughing	







### For aluminum

Finishing	
Medium	
Roughing	





# Recommendations for Chip Breakers

## ISO Positive inserts




### For steel

	← Stable  Unstable →
Finishing	  FA FG
Medium	   FM PC MT
Roughing	



### For stainless steel

	← Stable  Unstable →
Finishing	  FA FG
Medium	 PC
Roughing	



### For super alloys

	← Stable  Unstable →
Finishing	 FG
Medium	 PC
Roughing	

### For cast iron

	← Stable  Unstable →
Finishing	
Medium	 MT
Roughing	




### For aluminum

	← Stable  Unstable →
Finishing	
Medium	 GT-FL
Roughing	





# Recommendations for Chip Breakers

Chip breakers for Swiss turn (Ground type)

## RHINO-TURN Negative inserts


	← Stable	P	M	S	→ Unstable
Finishing		 VNGX-FS			
Finishing-Medium		 DNGG-FU			
Roughing		 GG-ML			






















## ISO Positive inserts

	← Stable	P	M	S	→ Unstable
Finishing		 SL			
Finishing-Medium		 SA	 SM		
Roughing		 SH			

# Chip Breakers


## Negative inserts

















Chip breaker name and geometry		Applications and features
FA	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Steel, stainless steel and heat resistant alloy machining</li> <li>• Excellent chip control</li> </ul>
EA	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For finishing applications</li> <li>• Exotic materials</li> <li>• Excellent chip control at low feeds and depths of cut</li> </ul>
FS	 <p>CNMG 0904</p>   <p><i>RHINO TURN</i></p>	<ul style="list-style-type: none"> <li>• Super finishing chip breaker for steel machining</li> <li>• Excellent chip control and chip evacuation</li> <li>• Minimal vibration due to less machining load</li> </ul>
FLP	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For finishing applications for steel machining</li> <li>• Wide supporting area</li> </ul>
FG	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For finish and semi finish applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Low cutting forces</li> </ul>
SF	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For finishing applications</li> <li>• Stainless steel and heat resistant alloy machining</li> <li>• Low cutting forces</li> </ul>
FX	 <p>VNMG 1604</p>  	<ul style="list-style-type: none"> <li>• For finishing applications on mild steels</li> <li>• Narrow chip breaker design for optimal chip control</li> </ul>

# Chip Breakers


## Negative inserts
























Chip breaker name and geometry		Applications and features
FC	 <p>CNMG 1204</p> 	<ul style="list-style-type: none"> <li>• Ideal for finishing applications</li> <li>• Low carbon steel &amp; low carbon alloy steel</li> <li>• Effective chip breaking in both turning and facing operations</li> </ul>
FM	 <p>CNMG 0904</p> 	<ul style="list-style-type: none"> <li>• For steel machining</li> <li>• Improved chip breaking due to 3dimension chipbreaker</li> <li>• Solution for a wide range from semi-finishing to semi-medium machining</li> </ul>
MLP	 <p>CNMG 1204</p> 	<ul style="list-style-type: none"> <li>• For semi-finishing and medium applications on steels</li> <li>• Wave cutting edge</li> </ul>
MC	 <p>CNMG 1204</p> 	<ul style="list-style-type: none"> <li>• For medium applications</li> <li>• Steel and cast iron machining</li> <li>• Strong rake geometry</li> <li>• Excellent chip control on medium turning applications</li> </ul>
FT	 <p>CNMG 0904</p> 	<ul style="list-style-type: none"> <li>• For steel machining</li> <li>• Strong, serrated cutting edge for excellent chip evacuation</li> <li>• Semi-finishing and medium machining</li> <li>• Excellent chip breaking for automotive components</li> </ul>
VF	 <p>DNMG 1504</p> 	<ul style="list-style-type: none"> <li>• For slender workpiece applications</li> <li>• Vibration free</li> <li>• Steel and stainless steel machining</li> <li>• High positive rake geometry to minimize cutting forces</li> </ul>
MGS	 <p>CNMG 1204</p> 	<ul style="list-style-type: none"> <li>• Low cutting resistance and heat generation in high-temperature alloy machining</li> <li>• High rake angle for smooth chip formation</li> </ul>

# Chip Breakers


## Negative inserts
























Chip breaker name and geometry		Applications and features
ML	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium light applications</li> <li>• Stainless steel, steel and aluminum</li> <li>• Very high positive rake geometry to minimize built-up-edge and cutting forces</li> </ul>
MP	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium machining applications</li> <li>• Steel and stainless steel</li> <li>• High positive rake geometry to optimize machining and provide stable machining conditions</li> </ul>
EM	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium applications</li> <li>• Stainless steel machining</li> <li>• Sharp land design for low cutting force</li> </ul>
MK	 <p>CNMG 0904</p>  	<ul style="list-style-type: none"> <li>• For medium applications</li> <li>• Stainless steel and heat resistant material machining</li> <li>• Sharp cutting edge to reduce built-up-edge</li> </ul>
MM	 <p>CNMG 0904</p>  	<ul style="list-style-type: none"> <li>• For general machining on stainless steel and steel</li> <li>• Positive rake angle provides excellent chip evacuation</li> </ul>
MGP	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• Wide range for medium application on steels</li> <li>• Wide groove and several dimples</li> </ul>
PC	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium to semi-finishing applications</li> <li>• Steel &amp; Automotive component</li> <li>• Positive geometry</li> <li>• Excellent chip control on medium applications</li> </ul>

# Chip Breakers


## Negative inserts

















Chip breaker name and geometry		Applications and features
MT	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium rough applications</li> <li>• Steel, cast iron and stainless steel</li> <li>• Tough rake angle for general use</li> </ul>
MG-	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium rough applications</li> <li>• Steel and cast iron machining</li> <li>• Strong rake geometry</li> <li>• Suitable for manual lathes</li> </ul>
ET	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For roughing applications on exotic materials</li> <li>• Low cutting force</li> <li>• Wide chip control range when roughing</li> </ul>
RGP	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For roughing applications on steels</li> <li>• Reliable cutting edge with low cutting force</li> </ul>
RT	 <p>CNMG 1906</p>  	<ul style="list-style-type: none"> <li>• For roughing applications</li> <li>• Steel and cast iron machining</li> <li>• Very strong rake geometry</li> </ul>
KT	 <p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For roughing applications on cast iron</li> <li>• Stable broad supporting area</li> <li>• Reliable, uniform performance</li> </ul>
RX	 <p>CNMM 1906</p>  	<ul style="list-style-type: none"> <li>• For semi heavy roughing applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Strong cutting edge with flat land</li> <li>• Low cutting force</li> </ul>


# Chip Breakers







## Negative inserts



Chip breaker name and geometry		Applications and features
RH	 <p>CNMM 1906</p> 	<ul style="list-style-type: none"> <li>• For roughing applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Very strong rake geometry</li> </ul>
EH	 <p>CNMM 2509</p> 	<ul style="list-style-type: none"> <li>• Heavy turning for stainless and mild steel</li> <li>• Low cutting force in stainless steel machining</li> <li>• Reliable &amp; uniform performance</li> <li>• Excellent chip control due to the specially designed chip breaker geometry</li> <li>• Single sided insert</li> </ul>
HT	 <p>CNMM 1906</p> 	<ul style="list-style-type: none"> <li>• For heavy roughing applications</li> <li>• Low cutting force for low horse power machines</li> <li>• Excellent chip control due to changeable land and a flexible chip breaker</li> </ul>
HD	 <p>CNMD 2509</p> 	<ul style="list-style-type: none"> <li>• For heavy roughing applications</li> <li>• For all kinds of shafts, connecting-rods and ship building components</li> <li>• Flexible chip breaker offers excellent chip evacuation</li> </ul>
HY	 <p>CNMM 2509</p> 	<ul style="list-style-type: none"> <li>• For heavy roughing applications</li> <li>• For large depth of cut and high feed</li> <li>• Strong cutting edge credit to a wide land and large land angle</li> </ul>
HZ	 <p>CNMM 2509</p> 	<ul style="list-style-type: none"> <li>• For heavy roughing applications</li> <li>• For large depth of cut and high feed</li> <li>• Extremely strong cutting edge credit to a wide land and large land angle</li> <li>• Suitable for high cutting conditions</li> </ul>
WS	 <p><b>wiper</b> CNMG 1204</p> 	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Steel, cast iron and stainless steel machining</li> <li>• Excellent chip control and low cutting forces</li> </ul>


## Negative inserts






Chip breaker name and geometry		Applications and features
<p><b>WA</b></p>  <p><b>wiper</b></p> <p>RHINO TURN</p>	<p>CNMG 0904</p>  	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Steel, cast iron and stainless steel machining</li> <li>• Excellent surface roughness after machining</li> </ul>
<p><b>WT</b></p>  <p><b>wiper</b></p>	<p>CNMG 1204</p>  	<ul style="list-style-type: none"> <li>• For medium to rough machining applications</li> <li>• Steel, cast iron and stainless steel machining</li> <li>• Stable cutting and low cutting forces at high feed rates</li> </ul>


# Chip Breakers

## Negative inserts








### DNUX type

Chip breaker name and geometry		Applications and features
11	  DNUX 1304 	<ul style="list-style-type: none"> <li>• For medium applications less than 5mm depth of cut</li> <li>• Steel and stainless steel machining</li> <li>• Positive rake geometry to decrease cutting forces</li> <li>• Suitable for turning slender bar, thin-wall components</li> </ul>







### KNUX type

Chip breaker name and geometry		Applications and features
11	 KNUX 1604 	<ul style="list-style-type: none"> <li>• For medium light to medium applications</li> <li>• Steel and stainless steel machining</li> <li>• Positive rake geometry to minimize cutting forces</li> <li>• Excellent chip control</li> </ul>
12	 KNUX 1604 	<ul style="list-style-type: none"> <li>• For medium to medium rough applications</li> <li>• Steel and stainless steel</li> <li>• Strong rake geometry</li> <li>• Wide chip control range</li> </ul>




















### HNMG type

Chip breaker name and geometry		Applications and features
GU	 HNMG 0504 	<ul style="list-style-type: none"> <li>• For medium applications</li> <li>• For general turning of steels and cast irons</li> <li>• Strong rake geometry</li> </ul>
SU	 HNMG 0504 	<ul style="list-style-type: none"> <li>• For exotic materials</li> <li>• Stainless steels, super alloys, low carbon steels, low carbon alloy steel machining</li> <li>• Sharp geometry to minimize built-up edge</li> </ul>

# Chip Breakers


## Positive inserts-pressed








Chip breaker name and geometry		Applications and features
FA	 <p>DCMT 11T3</p> 	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Very tight chipbreaker</li> <li>• Excellent chip control</li> </ul>
FG	 <p>CCMT 09T3</p> 	<ul style="list-style-type: none"> <li>• For finish to medium light applications</li> <li>• Steel and stainless steel machining</li> <li>• Low cutting forces</li> <li>• Excellent chip control</li> </ul>
FX	 <p>VBMT 1604</p> 	<ul style="list-style-type: none"> <li>• For finishing applications on mild steels</li> <li>• Narrow chip breaker design for optimal chip control</li> </ul>
PC	 <p>CCMT 09T3</p> 	<ul style="list-style-type: none"> <li>• For medium applications</li> <li>• Suitable for a wide variety of materials</li> <li>• Low cutting force</li> </ul>
FM	 <p>CCMT 09T3</p> 	<ul style="list-style-type: none"> <li>• Medium and semi-finishing machining for steel and stainless steel</li> <li>• Precision machining</li> <li>• Low cutting force chip breaker geometry</li> </ul>
MT	 <p>CCMT 09T3</p> 	<ul style="list-style-type: none"> <li>• For medium to medium rough applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Negative rake geometry for general use</li> </ul>
WT	 <p>CCMT 09T3</p> 	<ul style="list-style-type: none"> <li>• For medium to rough machining applications</li> <li>• Steel, cast iron and stainless steel machining</li> <li>• Stable cutting and low cutting forces at high feed rates</li> </ul>
PMR-	 <p>TPMR 1103</p> 	<ul style="list-style-type: none"> <li>• For medium to medium rough applications</li> <li>• Steel, stainless steel and cast iron</li> <li>• Positive rake geometry</li> </ul>

# Chip Breakers











## Positive inserts-pressed




Chip breaker name and geometry		Applications and features
RA	 <p>RCMX 3209</p> 	<ul style="list-style-type: none"> <li>• For heavy and interrupted machining applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Optimized chip groove geometry</li> </ul>
CMX-	 <p>RCMX 1204</p> 	<ul style="list-style-type: none"> <li>• For high feed roughing applications</li> <li>• Steel, stainless steel and cast iron machining</li> <li>• Strong rake geometry</li> </ul>











## Positive inserts-ground

Chip breaker name and geometry		Applications and features
FF	 <p>CCGT 0301</p> 	<ul style="list-style-type: none"> <li>• For finish to medium applications</li> <li>• For small component machining</li> <li>• Excellent surface finish</li> </ul>
GF	 <p>CCET 0602</p> 	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Steel, stainless steel and alloy steel machining</li> </ul>
GW	 <p>CCET 0602</p> 	<ul style="list-style-type: none"> <li>• For super finish applications</li> <li>• Wiper geometry for good surface finish</li> <li>• Steel, stainless steel and alloy steel machining</li> </ul>
FGS	 <p>VBG 1604</p> 	<ul style="list-style-type: none"> <li>• Lower cutting resistance and heat generation in heat resistant super alloys machining</li> <li>• High rake angle for smooth chip formation</li> </ul>
SL	 <p>CCGT 09T3</p> 	<ul style="list-style-type: none"> <li>• High performance in low depth of cut and low feed machining</li> <li>• Excellent chip segmentation due to wave geometry edge and special inclined design</li> </ul>

## Positive inserts-ground



Chip breaker name and geometry		Applications and features
SA	 <p>CCGT 09T3</p> 	<ul style="list-style-type: none"> <li>• For finish to medium applications</li> <li>• Steel &amp; aluminum machining</li> <li>• Low cutting force</li> </ul>
SM	 <p>CCGT 09T3</p> 	<ul style="list-style-type: none"> <li>• 1st recommended chip breaker for Swiss type automatic lathe</li> <li>• Stable cutting edge and low cutting resistance</li> </ul>
SH	 <p>CCGT 09T3</p> 	<ul style="list-style-type: none"> <li>• Suitable for deep depth of cut machining</li> <li>• Excellent chip control in a wide machining range</li> </ul>
FL	 <p>CCGT 1204</p> 	<ul style="list-style-type: none"> <li>• For finish to medium applications</li> <li>• Aluminum machining</li> <li>• Very high positive rake geometry to minimize built-up-edge</li> </ul>

# Turning Toolholders



**P**   **C**   **L**   **N**   **R**

**1**   **2**   **3**   **4**   **5**

## 1 Clamping system

Lever lock	Top clamp	Screw clamp	Multi lock	T-holder	Wedge clamp	Hook lever

## 2 Insert shape

C	D	E	H	K	R	S	T	V	W

## 3 Approach angle

Symbol	Shape	Offset	Symbol	Shape	Offset	Symbol	Shape	Offset
A		x	J		o	V		x
			K		o	W		o
B		x	L		o	X	Special angle	
			M		x	C*		x
D		x	N		x	H*		o
E		x	R		o	Q*		o
F		o	S		o			
G		o	T		o			
			U		o			

\* TaeguTec standard

## 5 Hand of tool

<b>R: Right hand</b>
<b>N: Neutral</b>
<b>L: Left hand</b>

## 4 Insert clearance angle

<b>N</b>	<b>B</b>	<b>C</b>	<b>P</b>

**25** **25** **M** **12** -    

6            7            8            9            10            11

## 6 Shank height

Integers to be preceded by 0  
e.g.: H=8mm indicated by 08

## 7 Shank width

Integers to be preceded by 0  
e.g.: B=8mm indicated by 08

## 8 Tool length

LF (mm)	Symbol	LF (mm)	Symbol
32	A	160	N
40	B	170	P
50	C	180	Q
60	D	200	R
70	E	250	S
80	F	300	T
90	G	350	U
100	H	400	V
110	J	450	W
125	K	500	Y
140	L	Special	X
150	M		

## 9 Cutting edge length

See page A265

## 10 Qualified tool

Q:  $WF \pm 0.08$ ,  $LF \pm 0.08$

F:  $WF \pm 0.08$ ,  $LF \pm 0.08$

B:  $WF \pm 0.08$ ,  $WF \pm 0.08$ ,  $LF \pm 0.08$

## 11 Manufacturer's type designation

Unique to manufacturer

**T-holder type** **T**

- ① Insert
- ② Shim screw
- ③ Shim
- ④ Clamp screw
- ⑤ Clamp
- ⑥ Spring

**Top clamp type** **C**

- ① Insert
- ② Shim
- ③ Shim pin
- ④ Clamp set

**Top clamp type** **C**

- ① Insert
- ② Shim
- ③ Shim screw
- ④ Clamp
- ⑤ Clamp screw
- ⑥ Pin and spring
- ⑦ Clamp spring

**Multi lock type** **M**

- ① Insert
- ② Shim
- ③ Lock pin
- ④ Clamp
- ⑤ Clamp screw

**Lever lock type** **P**

- ① Insert
- ② Shim
- ③ Lever
- ④ Shim pin
- ⑤ Screw

**Screw clamp type** **S**

- ① Insert
- ② Shim
- ③ Screw
- ④ Shim screw

**Wedge clamp type** **W**

- ① Insert
- ② Shim
- ③ Pin screw
- ④ Wedge set

**Ceramic T-holder** **T**

- ① Insert
- ② Shim screw
- ③ Shim
- ④ Clamp screw
- ⑤ Clamp
- ⑥ Spring


**Ceramic dimple holder** **T**




- ① Insert
- ② Shim screw
- ③ Shim
- ④ Clamp screw
- ⑤ Clamp
- ⑥ Spring

**Hook lever type** **H**

- ① Insert
- ② Shim pin
- ③ Shim
- ④ Hook lever
- ⑤ Screw

## Top clamp type holders

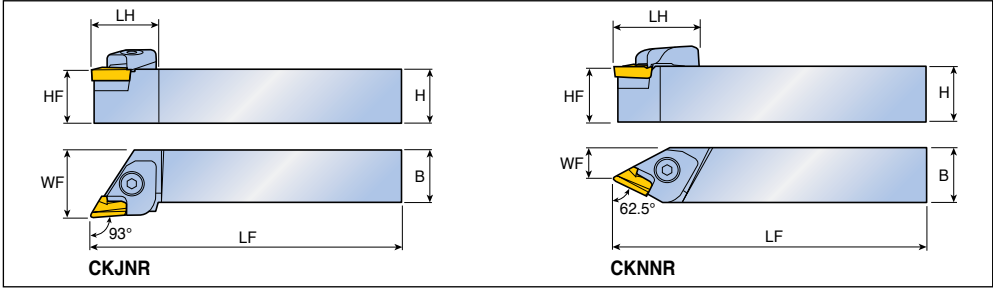


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>CKJNR/L 2020 K16</b>	20	20	20	125	35	25	KNUX 1604...R/L 11 KNUX 1604...R/L 12 
	<b>2020 M16</b>	20	20	20	150	35	25	
	<b>2525 M16</b>	25	25	25	150	32	32	
	<b>3225 P16</b>	32	32	25	170	33.3	32	
	<b>3232 M16</b>	32	32	32	150	33.3	40	
	<b>3232 P16</b>	32	32	32	170	33.3	40	
	<b>4040 R16</b>	40	40	40	200	33.3	50	
<b>62.5°</b> 	<b>CKNNR/L 2525 M16</b>	25	25	25	150	44.7	14.4	
	<b>3225 M16</b>	32	32	25	150	44.7	14.4	

## Spare parts

Designation	Clamp	Screw	Clamp spring	Pin	Pin spring	Shim	Shim screw	Wrench
<b>...16</b>	CL 16KR/L	CLS 16K	KSP 90	KP 48S	KSP 48	CSK 1604R/L	FH M3x0.5x10	L-W 4 L-W 2

## Top clamp type holders

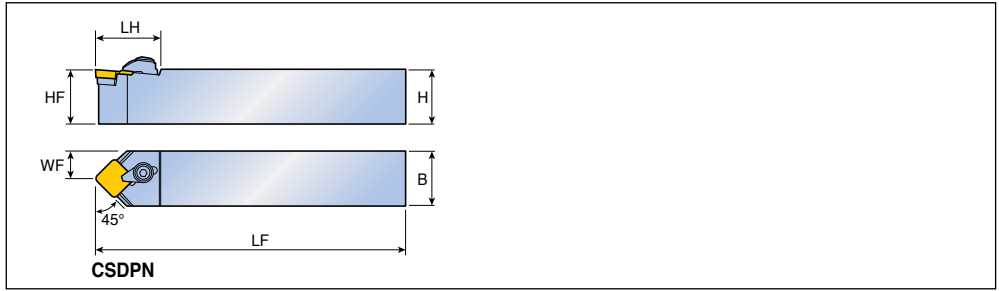


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
45° 	<b>CSDPN 1616 H09</b>	16	16	16	100	24	8.0	SPMR,SP...N 0903...
	<b>2020 K12</b>	20	20	20	125	29	10	SPMR,SP...N 1203...  A322, A352
	<b>2525 M12</b>	25	25	25	150	29	12.5	

## Spare parts

Designation	Clamp	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>...09</b>	CL 2	CLS 2	CSS 32	CSP 3	CSR 2	L-W 2.5		
<b>...12</b>	CL 3	CLS 3	CSS 42	CSP 3	WSR 4	L-W 3		

## Top clamp type holders

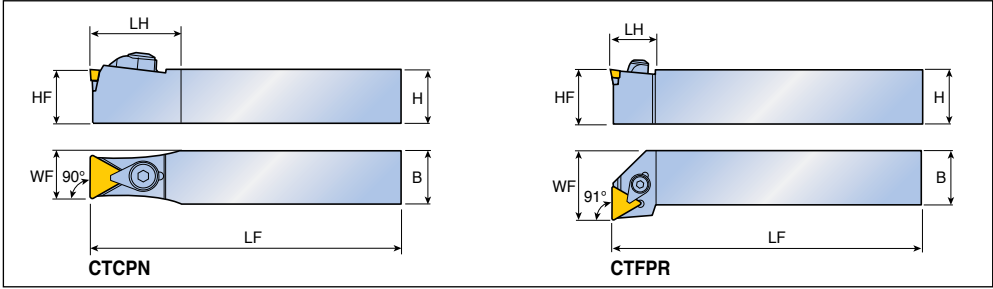


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>90°</b> 	<b>CTCPN 2009 K11</b>	20	20	9	125	20	9.4	TPMR,TP...N 1103...
	<b>2513 Q16</b>	25	25	13	180	30	14.1	TPMR,TP...N 1603... <b>A327-A329</b>
	<b>2525 M22</b>	25	25	25	150	50	19.4	TPMR,TP...N 2204... <b>A363, A364</b>
<b>91°</b> 	<b>CTFPR/L 1616 H11</b>	16	16	16	100	14.4	20	TPMR,TP...N 1103...
	<b>2020 K11</b>	20	20	20	125	16	25	
	<b>2020 K16</b>	20	20	20	125	20	25	TPMR,TP...N 1603...
	<b>2525 M16</b>	25	25	25	150	20	32	

## Spare parts

Designation	Clamp			Screw		Shim	Shim pin	Snap ring	Wrench
<b>CTCPN ...11</b>	CL 2C	-	-	CLS 2C	-	-	-	CSR 2C	L-W 2.5
<b>CTCPN ...16</b>	CL 3C	-	-	CLS 3C	-	CST 32	CSP 3	CSR 2	L-W 3
<b>CTCPN ...22</b>	-	CLM 12	-	-	XNSM 0825	CST 43	CSP 16K	CSR 4	L-W 4
<b>CTFPR/L...11</b>	-	-	CL 2	CLS 2	-	-	-	CSR 2	L-W 2.5
<b>CTFPR/L...16</b>	-	-	CL 3	CLS 3	-	CST 32	CSP 3	WSR 4	L-W 3

## Top clamp type holders

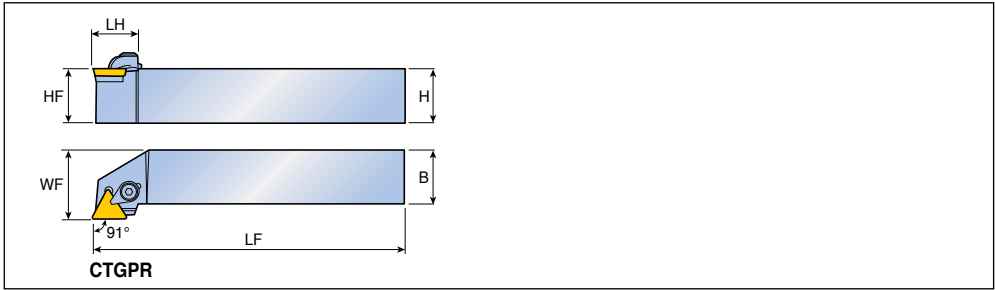

Approach angle	Designation	Dimension (mm)						Insert	
		H	HF	B	LF	LH	WF		
<b>91°</b> 	<b>CTGPR/L 1212 F11</b>	12	12	12	80	19	16	TPMR,TP...N 1103...  A327-A329, A363, A364	
	<b>1616 H11</b>	16	16	16	100	18	20		
	<b>2020 K11</b>	20	20	20	125	19	25		
		<b>2020 K16</b>	20	20	20	125	25	25	TPMR,TP...N 1603...
		<b>2525 M16</b>	25	25	25	150	25	32	TPMR,TP...N 2204...
		<b>2525 M22</b>	25	25	25	150	30	32	
		<b>3232 P22</b>	32	32	32	170	30	40	


## Spare parts





Designation	Clamp	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>...11</b>	CL 2	CLS 2	-	-	CSR 2	L-W 2.5		
<b>...16</b>	CL 3	CLS 3	CST 32	CSP 3	WSR 4	L-W 3		
<b>...22</b>	CL 4	CLS 4	CST 43	CSP 16K	CSR 4	L-W 4		

# HCLNR/L-RS HCLNR/L





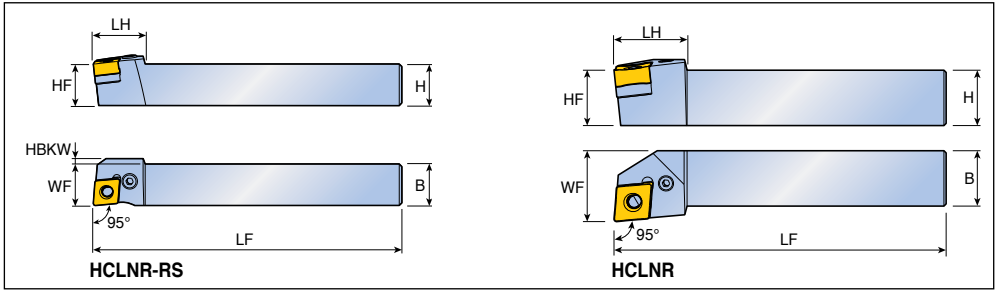


## Hook lever type holders







Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
 95°	<b>HCLNR/L 1212 K0904-RS</b>	12	12	16	125	18	12	2	CN... 0904...  A266, A268-A273
	<b>1616 K0904-RS</b>	16	16	16	125	20	16	-	
 95°	<b>HCLNR/L 1616 H0904</b>	16	16	16	100	22	20	-	CN... 0904... 
	<b>2020 H0904</b>	20	20	20	100	22	25	-	
	<b>2020 K0904</b>	20	20	20	125	22	25	-	
	<b>2525 M0904</b>	25	25	25	150	22	32	-	

## Spare parts



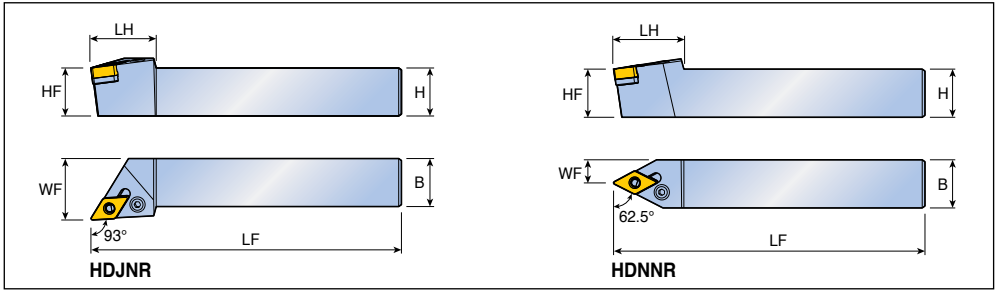


Designation	Lever	Screw	Snap ring	Shim	Shim pin	Wrench	
<b>...1212...0904</b>	LCL 09B-NX 	LCS 3B 	LSR 3B 	- 	- 	L-W 2 	
<b>...0904</b>	LCL 09-NX	LCS 3	-	LSC 32A	LSP 3A	L-W 2.5	

## Hook lever type holders



Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>HDJNR/L 2020 H1305</b>	20	20	20	100	34	25	DN... 1305...  A276-A281
	<b>2020 K1305</b>	20	20	20	125	34	25	
	<b>2525 M1305</b>	25	25	25	150	34	32	
<b>62.5°</b> 	<b>HDNNR/L 2020 K1305</b>	20	20	20	125	36.5	10	
	<b>2525 M1305</b>	25	25	25	150	36.5	12	


## Spare parts




Designation	Lever	Screw	Shim	Shim pin	Wrench		
...1305	 LCL 11-NX	 LCS 4	 LSD 3.52	 LSP 4	 L-W 3		

# HDQNR/L HDUNR/L



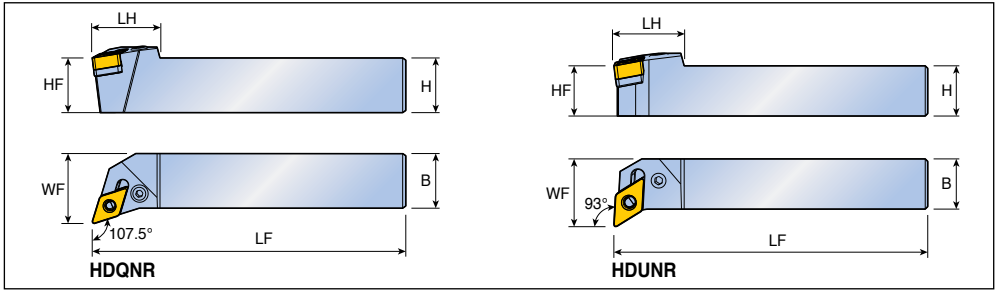




## Hook lever type holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>107.5°</b> 	<b>HDQNR/L 2020 K1305</b>	20	20	20	125	31	25	DN... 1305...  A276-A281
	<b>2525 M1305</b>	25	25	25	150	31	32	
<b>93°</b> 	<b>HDUNR/L 2020 K1305</b>	20	20	20	125	28	27	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench		
	...1305	 LCL 11-NX	 LCS 4	 LSD 3.52	 LSP 4	 L-W 3	

## Hook lever type holders

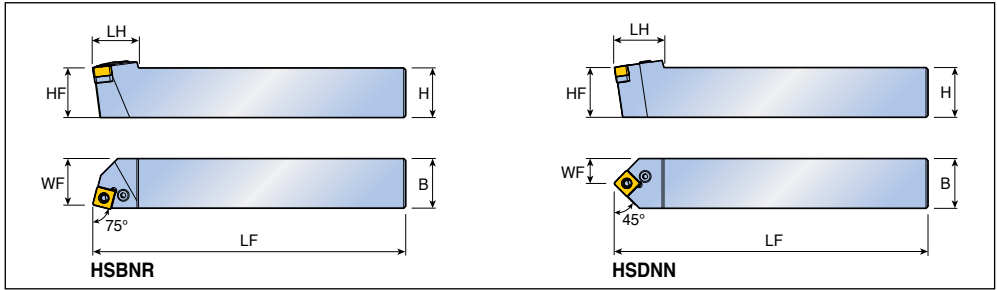





Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
75°	<b>HSBNR/L 4040 S3109</b>	40	40	40	250	55	35	SNMD 3109... A284, A285
	<b>5050 T3109</b>	50	50	50	300	55	43	
45°	<b>HSDNN 4040 S3109</b>	40	40	40	250	60	20	SNMD 3109...
	<b>5050 T3109</b>	50	50	50	300	60	25	

## Spare parts



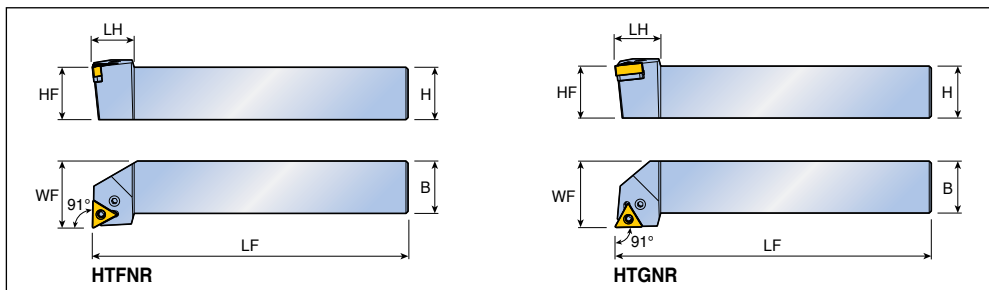


Designation	Lever	Screw	Shim	Shim pin	Wrench		
	...3109	LCL 32-NX	LCS 8	LSS 104	LSP 8	L-W 5	

## Hook lever type holders



Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>91°</b> 	<b>HTFNR/L 2020 K1304</b>	20	20	20	125	20	25	TN... 1304...  A291-A296
	<b>2525 M1304</b>	25	25	25	150	20	32	
<b>91°</b> 	<b>HTGNR/L 1616 H1304</b>	16	16	16	100	22	20	
	<b>2020 H1304</b>	20	20	20	100	22	25	
	<b>2020 K1304</b>	20	20	20	125	22	25	
	<b>2525 M1304</b>	25	25	25	150	22	32	


## Spare parts



Designation	Lever	Screw	Shim	Shim pin	Wrench		
	...						
<b>...1304</b>	LCL 08-NX	LCS 3-NX	LST 2.51.8	LSP 3B	L-W 2.5		

# HVJNR/L HVQNR/L



## Hook lever type holders

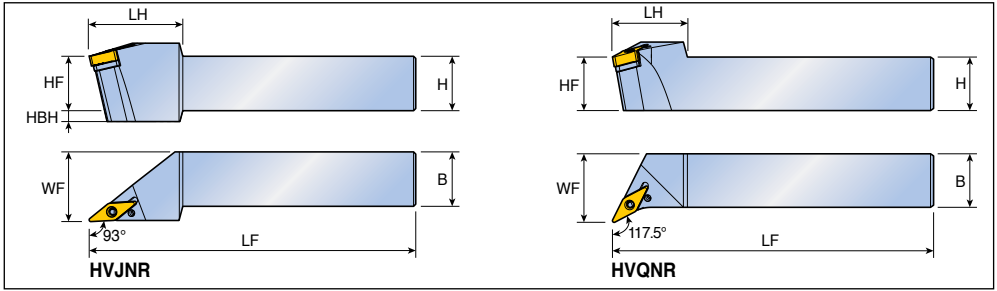


Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBH	
<b>93°</b> 	<b>HVJNR/L 1616 H1304</b>	16	16	16	100	30	20	5	VN...X 1304... YNMG 1304... A297-A299, RHINO TURN A305
	<b>2020 K1304</b>	20	20	20	125	35	25	-	
	<b>2525 M1304</b>	25	25	25	150	43	32	-	
<b>117.5°</b> 	<b>HVQNR/L 2020 K1304</b>	20	20	20	125	35	25	-	
	<b>2525 M1304</b>	25	25	25	150	35	32	-	


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...1304</b>	LCL 08-NX	LCS 4-DH	LSV 2.51.8H	LSP 3B	L-W 2.5			

## Hook lever type holders

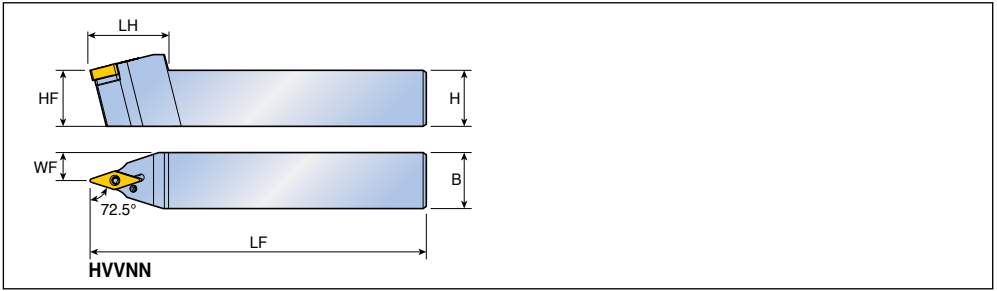


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>72.5°</b>	<b>HVVNN 2020 K1304</b>	20	20	20	125	35	10	VN...X 1304...
	<b>2525 M1304</b>	25	25	25	150	35	12.5	YNMG 1304...  A297-A299, A305



## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...1304</b>	LCL 08-NX	LCS 4-DH	LSV 2.51.8H	LSP 3B	L-W 2.5			

## Hook lever type holders

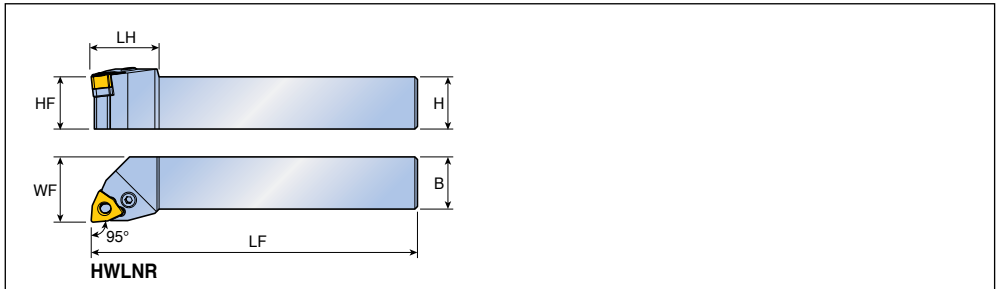







Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>95°</b> 	<b>HWLNRL/L 1616 H0604</b>	16	16	16	100	26	20	WN...X 0604... A303, A304
	<b>2020 K0604</b>	20	20	20	125	26	25	
	<b>2525 M0604</b>	25	25	25	150	26	32	

## Spare parts



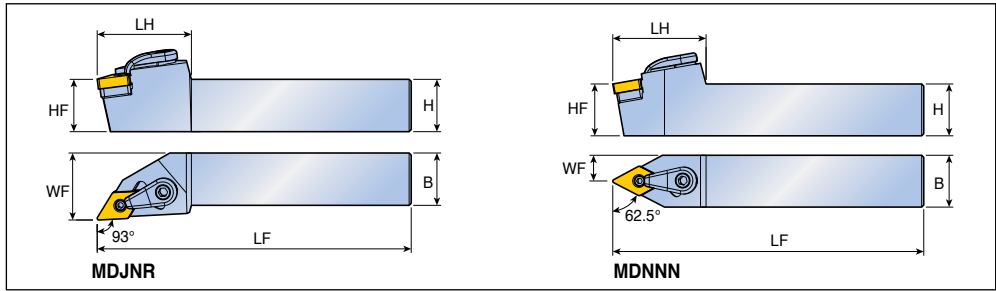







Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...0604</b>	LCL 09-NX	LCS 3	LSW 32A	LSP 3A	L-W 2.5			

## Multi lock type holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>MDJNR/L 2020 K15</b>	20	20	20	125	45	25	DN... 1504... 
	<b>2525 M15</b>	25	25	25	150	45	32	DN... 1506...  A276-A281,  A343, A354
	<b>2020 K15A</b>	20	20	20	125	45	25	
	<b>2525 M15A</b>	25	25	25	150	45	32	
	<b>3232 P15A</b>	32	32	32	170	45	40	
<b>62.5°</b> 	<b>MDNNN 2525 M15</b>	25	25	25	150	45	12.5	DN... 1504...
	<b>3225 P15</b>	32	32	25	170	45	12.5	DN... 1506...
	<b>2525 M15A</b>	25	25	25	150	45	12.5	

## Spare parts

Designation	Clamp	Screw	Shim	Lock pin	Wrench			
<b>...15</b>	 CLM 30	 XNSM 0825	 S 45	 MLP 4	 L-W 2.5, L-W 4			
<b>...15A</b>	 CLM 30	 XNSM 0825	 MSD 43	 MLP 4-06	 L-W 2.5, L-W 4			

## Multi lock type holders

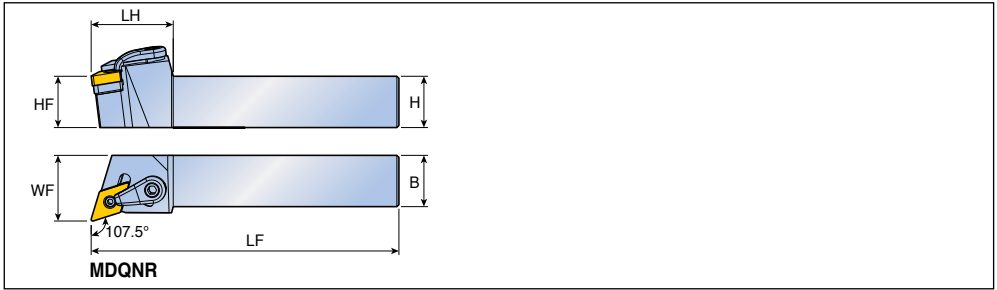


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>107.5°</b> 	<b>MDQNR/L 2020 K15</b>	20	20	20	125	40	25	DN... 1504...
	<b>2525 M15</b>	25	25	25	150	40	32	A276-A281,
	<b>2525 M15A</b>	25	25	25	150	40	32	DN... 1506... A343, A354

## Spare parts

Designation	Clamp	Screw	Shim	Lock pin	Wrench			
<b>...15</b>	CLM 30	XNSM 0825	S 45	MLP 4	L-W 2.5, L-W 4			
<b>...15A</b>	CLM 30	XNSM 0825	MSD 43	MLP 4-06	L-W 2.5, L-W 4			

## Multi lock type holders

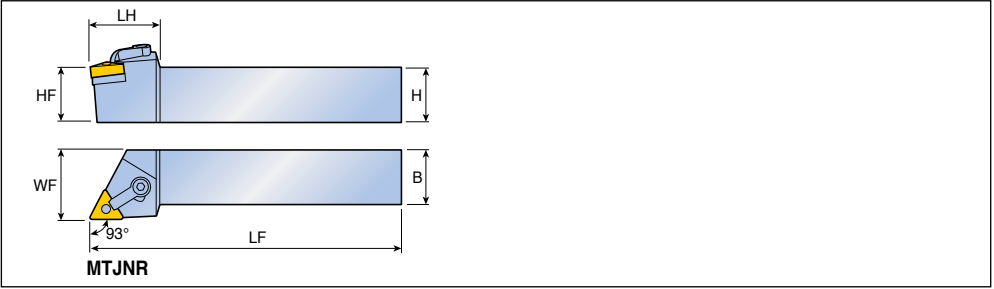





Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b>	<b>MTJNR/L 2020 K16</b>	20	20	20	125	28	25	TN... 1603...
	<b>2525 M16</b>	25	25	25	150	28	32	A291-A296,
	<b>2525 M1604</b>	25	25	25	150	28	32	TN... 1604... A349, A357

## Spare parts



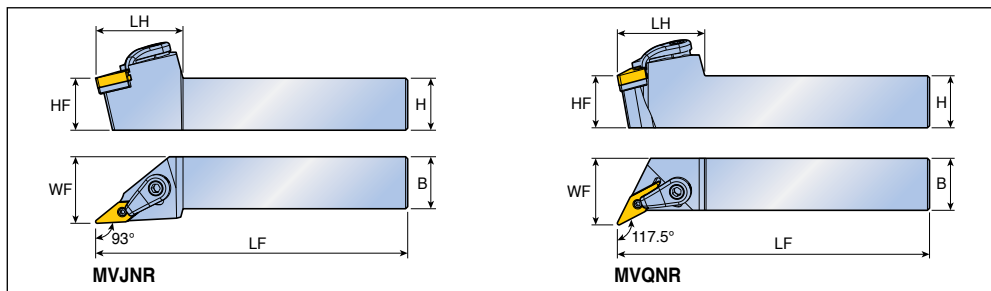


Designation	Clamp	Screw	Shim	Lock pin	Wrench			
<b>...16</b>	CLM 6	XNSM 0520	S 3	MLP 3	L-W 2, L-W 2.5			
<b>...1604</b>	CLM 6	XNSM 0520	S 31	MLP 3	L-W 2, L-W 2.5			

## Multi lock type holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>MVJNR/L 2020 K16</b>	20	20	20	125	42	25	VN... 1604...  A297-A299, A350, A358
	<b>2525 M16</b>	25	25	25	150	42	32	
	<b>3225 P16</b>	32	32	25	170	42	32	
	<b>3232 P16</b>	32	32	32	170	42	40	
<b>117.5°</b> 	<b>MVQNR/L 2020 K16</b>	20	20	20	125	42	25	
	<b>2525 M16</b>	25	25	25	150	42	32	
	<b>3232 P16</b>	32	32	32	170	42	40	

## Spare parts

Designation	Clamp	Screw	Shim	Lock pin	Wrench			
<b>...16</b>	 CLM 30	 XNSM 0825	 IVSN 324	 MLP 3	 L-W 2, L-W 4			

## Multi lock type holders

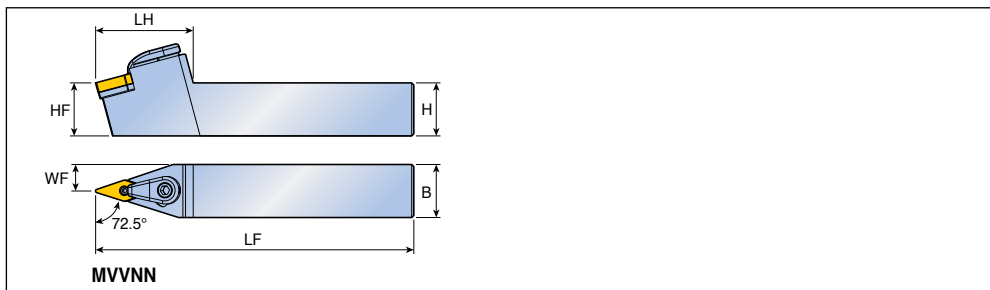


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
72.5°	<b>MVVNN 2020 K16</b>	20	20	20	125	46	10.0	VN... 1604...  A297-A299, A350, A358
	<b>2525 M16</b>	25	25	25	150	46	12.5	

## Spare parts

Designation	Clamp	Screw	Shim	Lock pin	Wrench			
...	CLM 30	XNSM 0825	IVSN 324	MLP 3	L-W 2, L-W 4			

## Multi lock type holders

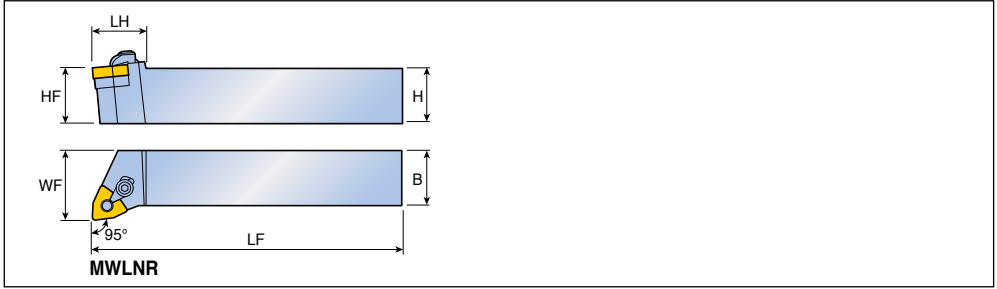


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
95°	<b>MWLN/L 1616 H06</b>	16	16	16	100	19.4	16	WN... 0604...
	<b>2020 K08</b>	20	20	20	125	25	25	WN... 0804...
	<b>2525 M08</b>	25	25	25	150	25	32	A300-A303, A350-A359

## Spare parts

Designation	Clamp	Screw	Shim	Lock pin	Snap ring	Wrench		
...06	CL 2	CLS 2	MSW 32	MLP 3	CSR 2	L-W 2, L-W 2.5		
...08	CL 2	CLS 2	MSW 43	MLP 4	CSR 2	L-W 2.5		

## Lever lock type holders

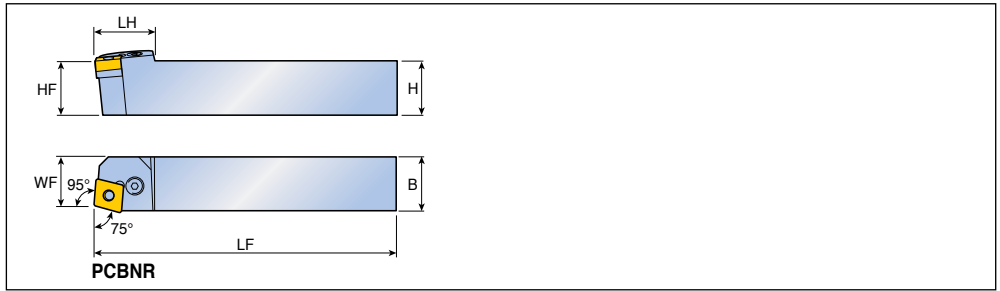

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
75° 	<b>PCBNR/L 2020 K12</b>	20	20	20	125	28	17.5	CN... 1204...  A266-A275, A341, A342, A353
	<b>2525 M12</b>	25	25	25	150	28	22.5	
	<b>3225 P12</b>	32	32	25	170	28	22.5	
	<b>2525 M16</b>	25	25	25	150	32	22	CN... 1606...
	<b>3232 P16</b>	32	32	32	170	32	27	CN... 1906...
	<b>3232 P1906D</b>	32	32	32	170	37	27	CN... 1906...
	<b>4040 S1906D</b>	40	40	40	250	37	37	CN... 2509...
	<b>4040 S2509D</b>	40	40	40	250	50	37	CN... 2509...
	<b>5050 T2509D</b>	50	50	50	300	50	47	


• CNMD, CNMM, CNMG type insert can be mounted on "-D" holder

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...12</b>	LCL 4	LCS 4	LSC 42	LSP 4	L-W 3			
<b>...16</b>	LCL 5	LCS 5	LSC 53	LSP 5	L-W 3			
<b>...1906</b>	LCL 6D	LCS 25C	LSC 64D	LSP 6	L-W 4			
<b>...2509</b>	LCL 8	LCS 8	LSC 84D	LSP 8	L-W 5			

• LSC 85D Shim can be used for CN...2507... insert

## Lever lock type holders

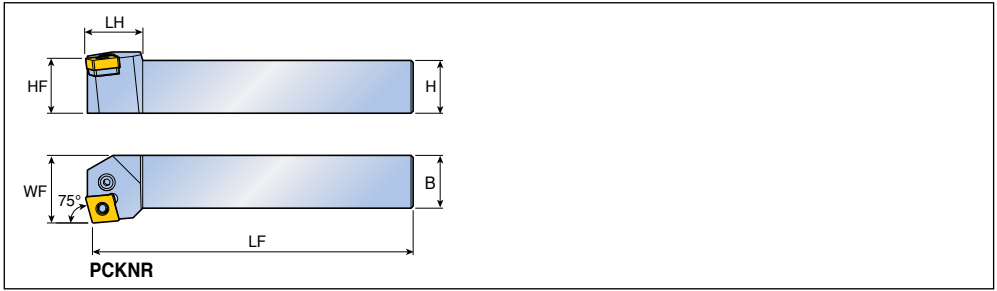


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>75°</b>	<b>PCKNR/L 2020 K12</b>	20	20	20	125	27	25	CN... 1204... A266, A268-A273, A275, A341, A342, A353
	<b>2525 M12</b>	25	25	25	150	24	32	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
...12	 LCL 4	 LCS 4	 LSC 42	 LSP 4	 L-W 3			

## Lever lock type holders

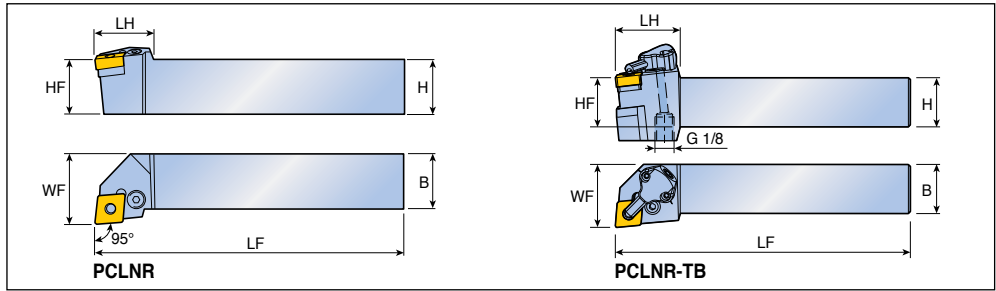

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>PCLNR/L 1616 H12</b>	16	16	16	100	27	20	CN... 1204...  A266-A275, A341, A342, A353
	<b>2020 K12</b>	20	20	20	125	27	25	
	<b>2525 M12</b>	25	25	25	150	27	32	
	<b>3225 P12</b>	32	32	25	170	27	32	CN... 1606...
	<b>3232 P12</b>	32	32	32	170	27	40	
	<b>2525 M16</b>	25	25	25	150	33	32	
	<b>3225 P16</b>	32	32	25	170	33	32	CN... 1906...
	<b>3232 P16</b>	32	32	32	170	33	40	
	<b>2525 M1906D</b>	25	25	25	150	38	32	
	<b>3225 P1906D</b>	32	32	25	170	38	32	CN... 2509...
	<b>3232 P1906D</b>	32	32	32	170	38	40	
	<b>4040 S1906D</b>	40	40	40	250	38	50	
	<b>4040 S2509D</b>	40	40	40	250	47	50	CN... 1204...
<b>5050 T2509D</b>	50	50	50	300	47	60		
<b>3232 P12-TB</b>	32	32	32	170	33	40		
<b>PCLNR/L 2525 M12-TB</b>	25	25	25	150	33	32		

• CNMD, CNMM, CNMG type insert can be mounted on "-D" holder

## Spare parts


Designation	Lever	Screw	Shim	Shim pin	Cooling unit	O-ring	Plug	Wrench	
<b>1616...12</b>	LCL 4	LCS 4S	LSC 42	LSP 4	-	-	-	-	L-W 3
<b>...12</b>	LCL 4	LCS 4	LSC 42	LSP 4	-	-	-	-	L-W 3
<b>...16</b>	LCL 5	LCS 5	LSC 53	LSP 5	-	-	-	-	L-W 3
<b>...1906</b>	LCL 6D	LCS 25C	LSC 64D	LSP 6	-	-	-	-	L-W 4
<b>...2509</b>	LCL 8	LCS 8	LSC 84D	LSP 8	-	-	-	-	L-W 5
<b>PCLNR/L...TB</b>	LCS 4	LCS 4	LSC 42	LSP 4	CU-CW-TB	ID 6.4x0.9	SS M4x0.7x4-NL	T 8	L-W 2, L-W 3




- LSC 85D Shim can be used for CN...2507... insert
- Please refer to A164 page for COOL-BURST accessories

# PDJNR/L PDJNR/L-TB





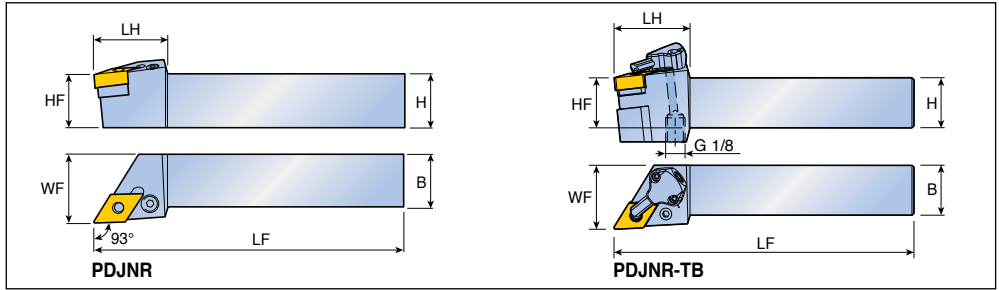






## Lever lock type holders




Approach angle	Designation	Dimension (mm)						Insert	
		H	HF	B	LF	LH	WF		
 93°	<b>PDJNR/L 1616 H11</b>	16	16	16	100	30	20	DN... 1104...	
	<b>2020 K11</b>	20	20	20	125	30	25	DN... 1506...  A276-A281, A343, A354	
	<b>2525 M11</b>	25	25	25	150	30	32		
	<b>2020 K15</b>	20	20	20	125	34	25		
	<b>2525 M15</b>	25	25	25	150	34	32		
	<b>3225 P15</b>	32	32	25	170	34	32		
	<b>3232 P15</b>	32	32	32	170	34	40		
		<b>2020 K15A</b>	20	20	20	125	34	25	DN... 1504...
		<b>2525 M15A</b>	25	25	25	150	34	32	
 93°	<b>PDJNR/L 2525 M1504-TB</b>	25	25	25	150	37	32	DN... 1504...	
	<b>2525 M1506-TB</b>	25	25	25	150	37	32	DN... 1506...	

## Spare parts


Designation	Lever	Screw	Shim	Shim pin	Cooling unit	O-ring	Plug	Wrench	
...11	 LCL 12C	 LCS 3	 LSD 32	 LSP 3A	 -	 -	 -	 -	 L-W 2.5
...15	LCL 4A	LCS 4	LSD 42	LSP 4	-	-	-	-	L-W 3
...M1504-TB	LCL 4A	LCS 4	LSD 43	LSP 4	CU-D-TB	ID 6.4x0.9	SS M4x0.7x4-NL	T 8	L-W 2, L-W 3
...M1506-TB	LCL 4A	LCS 4	LSD 42	LSP 4	CU-D-TB	ID 6.4x0.9	SS M4x0.7x4-NL	T 8	L-W 2, L-W 3

• Please refer to A164 page for COOL-BURST accessories

## Lever lock type holders

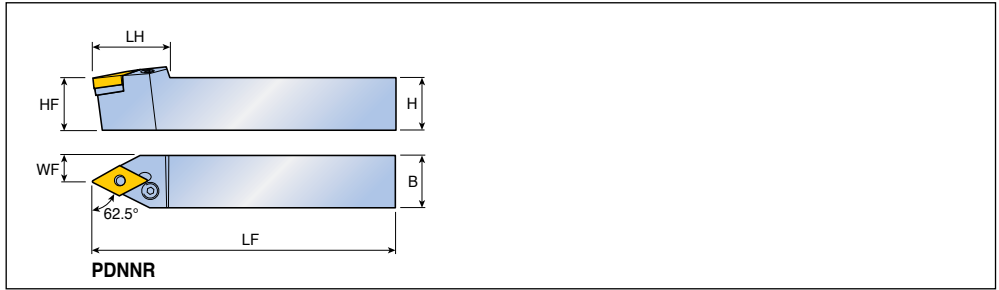


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>62.5°</b>	<b>PDNNR/L 2020 K15</b>	20	20	20	125	36.5	10	DN... 1506...  A276-A281, A343, A354
	<b>2525 M15</b>	25	25	25	150	36.5	12	
	<b>3232 P15</b>	32	32	32	170	36.5	16.8	



## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...15</b>	LCL 4A	LCS 4	LSD 42	LSP 4	L-W 3			

## Lever lock type holders

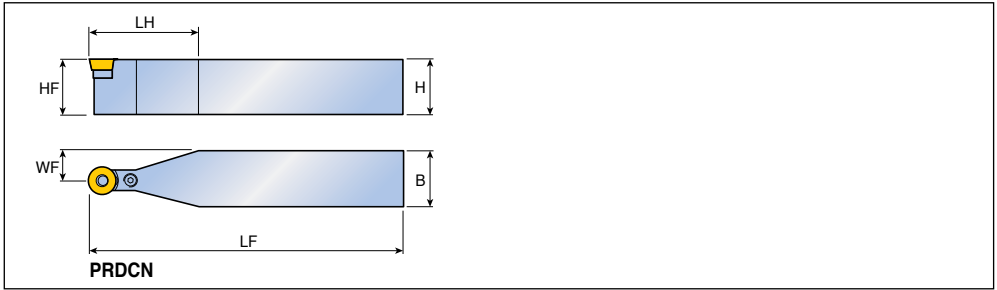


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>45°</b> 	<b>PRDCN 2020 M10</b>	20	20	20	150	50	10.0	RC...X 1003... A320
	<b>2525 M10</b>	25	25	25	150	50	12.5	
	<b>2020 K12</b>	20	20	20	125	50	10.0	
	<b>2525 M12</b>	25	25	25	150	50	12.5	RC...X 1204...
	<b>3225 Q12</b>	32	32	25	180	50	12.5	
	<b>2525 Q16</b>	25	25	25	180	50	12.5	RC...X 1606...
	<b>3225 Q16</b>	32	32	25	180	50	12.5	
	<b>3232 Q16</b>	32	32	32	180	50	16.0	RC...X 2006...
	<b>3232 S20</b>	32	32	32	250	60	16.0	
	<b>4040 S20</b>	40	40	40	250	70	20.0	RC...X 2507...
	<b>4040 S25</b>	40	40	40	250	80	20.0	
	<b>4040 T25</b>	40	40	40	300	80	20.0	RC...X 3209...
	<b>5050 U32</b>	50	50	50	350	90	25.0	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...10</b>	LCL 10C	LCS 2	LSR 32	LSP 3A	L-W 2			
<b>...12</b>	LCL 12C	LCS 3	LSR 1203	LSP 3A	L-W 2.5			
<b>...16</b>	LCL 16C	LCS 16C	LSR 1604	LSP 16C	L-W 2.5			
<b>...20</b>	LCL 20C	LCS 5	LSR 2004	LSP 5	L-W 3			
<b>...25</b>	LCL 25C	LCS 25C	LSR 2506	LSP 6	L-W 4			
<b>...32</b>	LCL 32C	LCS 8	LSR 3206	LSP 8	L-W 5			

## Lever lock type holders

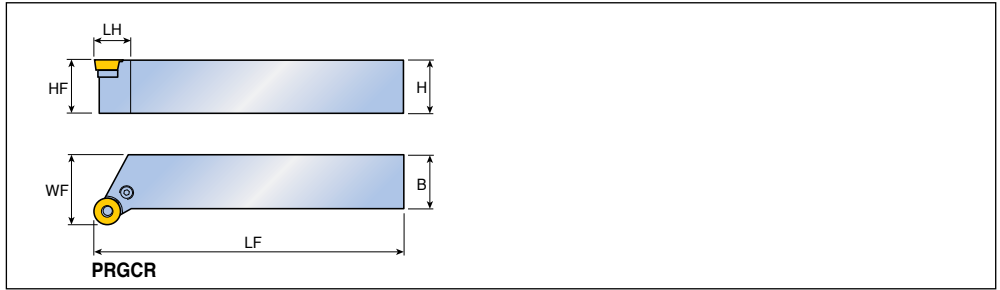


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>90°</b> 	<b>PRGCR/L 2020 K10</b>	20	20	20	125	14.5	25	RC...X 1003...  A320
	<b>2525 M10</b>	25	25	25	150	17.5	32	
	<b>3225 P10</b>	32	32	25	170	17	32	
	<b>2020 K12</b>	20	20	20	125	18	25	RC...X 1204...
	<b>2525 M12</b>	25	25	25	150	18	32	
	<b>3225 P12</b>	32	32	25	170	18	32	
	<b>2525 M16</b>	25	25	25	150	23	32	RC...X 1606...
	<b>3225 P16</b>	32	32	25	170	23	32	
	<b>3232 P16</b>	32	32	32	170	23	40	
	<b>4040 P16</b>	40	40	40	170	23	50	RC...X 2006...
	<b>3232 P20</b>	32	32	32	170	27.5	40	
	<b>4040 S25</b>	40	40	40	250	33.5	50	
	<b>4040 S32</b>	40	40	40	250	41	50	RC...X 2507...
								RC...X 3209...


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...10</b>	LCL 10C	LCS 2	LSR 32	LSP 3A	L-W 2			
<b>...12</b>	LCL 12C	LCS 3	LSR 1203	LSP 3A	L-W 2.5			
<b>...16</b>	LCL 16C	LCS 16C	LSR 1604	LSP 16C	L-W 2.5			
<b>...20</b>	LCL 20C	LCS 5	LSR 2004	LSP 5	L-W 3			
<b>...25</b>	LCL 25C	LCS 25C	LSR 2506	LSP 6	L-W 4			
<b>...32</b>	LCL 32C	LCS 8	LSR 3206	LSP 8	L-W 5			

## Lever lock type holders

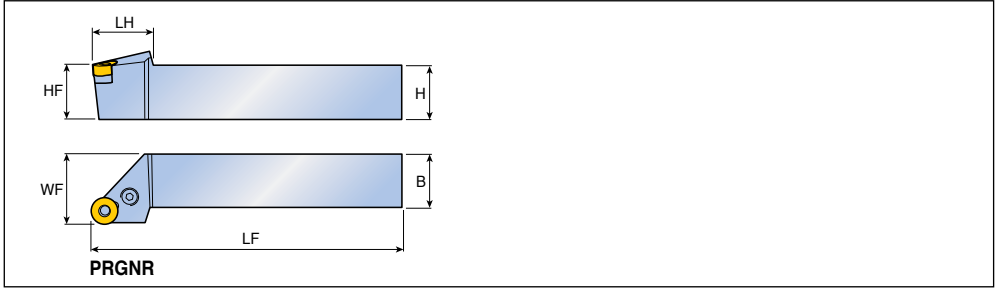


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>90°</b>	<b>PRG NR/L 2525 M12</b>	25	25	25	150	28	32	RNMG 120400
	<b>3225 P15</b>	32	32	25	170	35	32	RNMG 150600
	<b>3232 P19</b>	32	32	32	170	38	40	RNMG 190600






## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench		
...09	LCL 3	LCS 3	LSR 32	LSP 3A	L-W 2.5		
...12	LCL 4	LCS 4	LSR 42	LSP 4	L-W 3		
...15	LCL 5	LCS 5	LSR 53	LSP 5	L-W 3		
...19	LCL 6D	LCS 6	LSR 63	LSP 6	L-W 4		

## Lever lock type holders

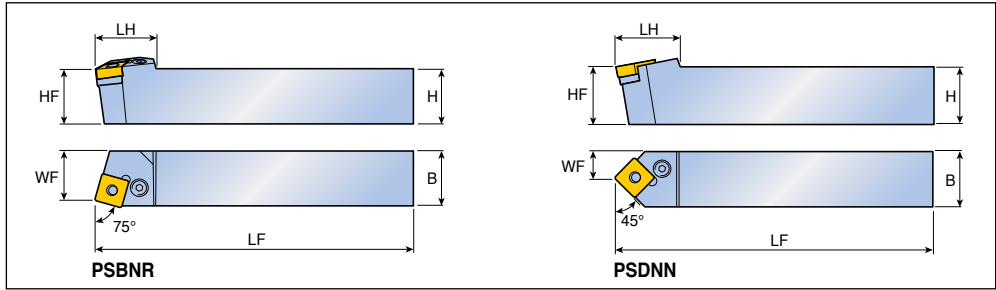

Approach angle	Designation	Dimension (mm)						Insert	
		H	HF	B	LF	LH	WF		
<b>75°</b> 	<b>PSBNR/L</b>	<b>2020 K12</b>	20	20	20	125	28	17	SN... 1204...  A284-A290, A346, A347, A356
		<b>2525 M12</b>	25	25	25	150	28	22	
		<b>3225 P12</b>	32	32	25	170	28	22	
		<b>2525 M15</b>	25	25	25	150	34	22	
		<b>3232 P1906D</b>	32	32	32	170	39	27	
		<b>4040 S1906D</b>	40	40	40	250	39	35	
		<b>4040 S2509D</b>	40	40	40	250	48	35	
		<b>5050 T2509D</b>	50	50	50	300	48	43	
<b>45°</b> 	<b>PSDNN</b>	<b>2020 K12</b>	20	20	20	125	28	10.0	SN... 1204...
		<b>2525 M12</b>	25	25	25	150	28	12.5	
		<b>3225 P12</b>	32	32	25	170	28	12.5	
		<b>2020 K15</b>	20	20	20	125	34	10.0	SN... 1506...
		<b>2525 M15</b>	25	25	25	150	34	12.5	
		<b>3225 P1906D</b>	32	32	25	170	40.5	12.5	SN... 1906...
		<b>3232 P1906D</b>	32	32	32	170	40.5	16.0	
		<b>4040 S1906D</b>	40	40	40	250	40.5	20.0	
		<b>5050 S1906D</b>	50	50	50	250	40.5	25.0	
		<b>4040 S2509D</b>	40	40	40	250	49	20.0	SN... 2509...
		<b>5050 T2509D</b>	50	50	50	300	49	25.0	


• SNMD, SNMM, SNMG type insert can be mounted on "-D" holder

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...12</b>	LCL 4	LCS 4	LSS 42	LSP 4	L-W 3			
<b>...15</b>	LCL 5	LCS 5	LSS 53	LSP 5	L-W 3			
<b>...1906</b>	LCL 6D	LCS 25C	LSS 64D	LSP 6	L-W 4			
<b>...2509</b>	LCL 8	LCS 8	LSS 84D	LSP 8	L-W 5			

• LSS 85D Shim can be used for SN... 2507... insert

## Lever lock type holders

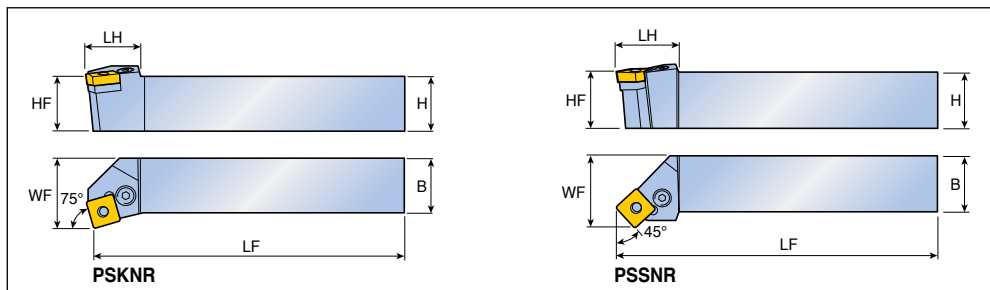

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>PSKNR/L 2020 K12</b>	20	20	20	125	25	25	SN... 1204...
	<b>2525 M12</b>	25	25	25	150	25	32	SN... 1506... A284-A290, A346, A347, A356
	<b>2525 M15</b>	25	25	25	150	32	32	
	<b>3232 P15</b>	32	32	32	170	32	40	SN... 1906...
	<b>3232 P1906D</b>	32	32	32	170	38	40	SN... 1906...
	<b>4040 S1906D</b>	40	40	40	250	38	50	SN... 2509...
	<b>4040 S2509D</b>	40	40	40	250	42	50	SN... 2509...
	<b>5050 T2509D</b>	50	50	50	300	42	60	
	<b>PSSNR/L 2020 K12</b>	20	20	20	125	30	25	SN... 1204...
	<b>2525 K12</b>	25	25	25	125	30	32	SN... 1506...
	<b>2525 M12</b>	25	25	25	150	30	32	
	<b>3225 P12</b>	32	32	25	170	30	32	SN... 1906...
	<b>3232 P12</b>	32	32	32	170	32	40	SN... 1506...
	<b>3232 P15</b>	32	32	32	170	37	40	SN... 1906...
	<b>4040 S1906D</b>	40	40	40	250	42	50	SN... 2509...
	<b>4040 S2509D</b>	40	40	40	250	53	50	SN... 2509...


• SNMD, SNMM, SNMG type insert can be mounted on "-D" holder

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
...12	LCL 4	LCS 4	LSS 42	LSP 4	L-W 3			
...15	LCL 5	LCS 5	LSS 53	LSP 5	L-W 3			
...1906	LCL 6D	LCS 25C	LSS 64D	LSP 6	L-W 4			
...2509	LCL 8	LCS 8	LSS 84D	LSP 8	L-W 5			

• LSS 85D Shim can be used for SN... 2507... insert

## Lever lock type holders

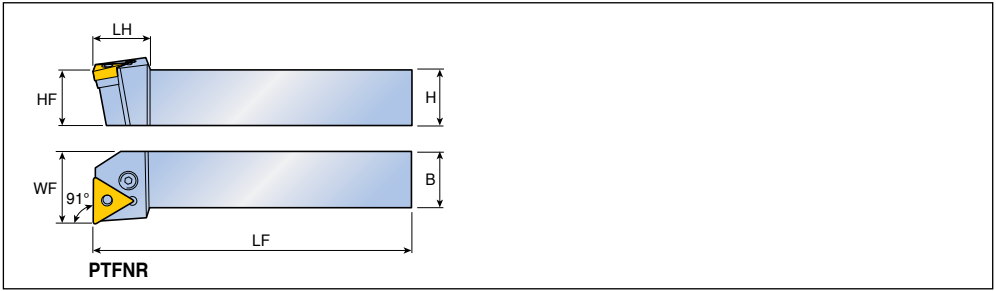




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>91°</b>	<b>PTFNR/L 2020 K16</b>	20	20	20	125	20	25	TN... 1604...  A291-A296, A349, A357
	<b>2525 M16</b>	25	25	25	150	20	32	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
<b>...16</b>	LCL 3	LCS 3	LST 31.8	LSP 3A	L-W 2.5			

## Lever lock type holders

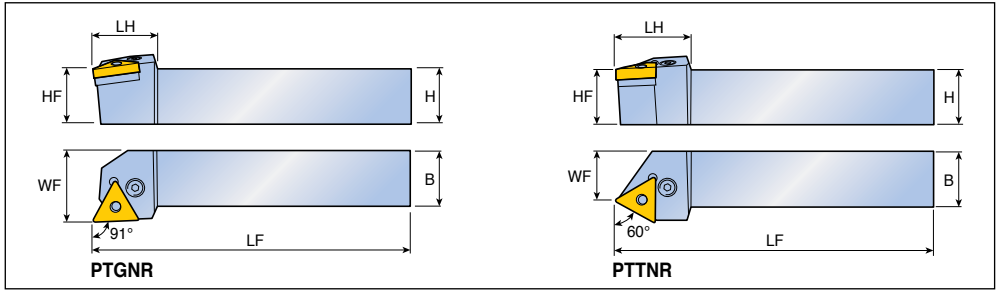

Approach angle	Designation	Dimension (mm)						Insert				
		H	HF	B	LF	LH	WF					
<b>91°</b> 	<b>PTGNR/L</b>	<b>1010 E11</b>	10	10	10	70	15	12	TN... 1103... A291-A296			
		<b>1212 F11</b>	12	12	12	80	15	16				
		<b>2525 M11</b>	25	25	25	150	30	32				
				<b>1616 H16</b>	16	16	16	100	22	20	TN... 1604...	
				<b>2020 K16</b>	20	20	20	125	22	25		
				<b>2525 M16</b>	25	25	25	150	22	32		
				<b>3232 P16</b>	32	32	32	170	22	40		
				<b>2525 M22</b>	25	25	25	150	29	32		TN... 2204...
				<b>3232 P22</b>	32	32	32	170	29	40		
<b>60°</b> 	<b>PTTNR/L</b>	<b>1616 H16</b>	16	16	16	100	24	13	TN... 1604...			
		<b>2020 K16</b>	20	20	20	125	24	17				
		<b>2525 M16</b>	25	25	25	150	24	22				


## Spare parts

Designation	Lever	Screw	Shim	Snap ring	Shim pin	Wrench		
...11	LCL 2B	LCS 2B	-	LSR 2B	-	L-W 2		
...16	LCL 3	LCS 3	LST 31.8	-	LSP 3A	L-W 2.5		
...22	LCL 4	LCS 4	LST 42	-	LSP 4	L-W 3		

# PWLNLR/L-TB



## Lever lock type holders

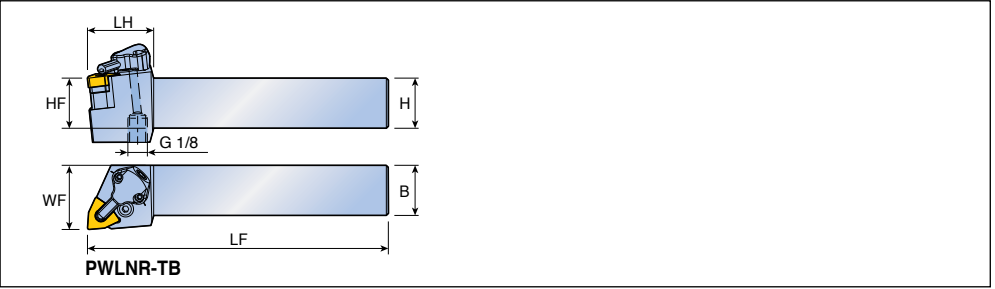

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
95°	<b>PWLNLR/L 2525 M08-TB</b>	25	25	25	150	33	32	WN... 0804... A300-A303, A350, A359
	<b>3232 P08-TB</b>	32	32	32	170	33	40	

### Spare parts


Designation	Lever	Screw	Shim	Shim pin	Cooling unit	O-ring	Plug	Wrench	
	<b>PWLNLR/L...TB</b>	LCL 4	LCS 4	TWN 423(T)	LSP 4	CU-CW-TB	ID 6.4x0.9	SS M4x0.7x4-NL	T 8



• Please refer to A164 page for COOL-BURST accessories

# SCACR/L-SH SCACR/L-SH-TB



## Screw type holders

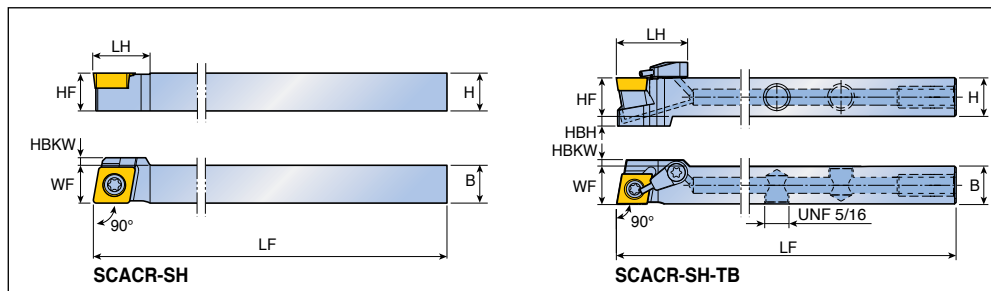






Approach angle	Designation	Dimension (mm)								Insert
		H	HF	HBH	B	LF	LH	WF	HBKW	
 90°	# SCACR/L <b>1010 K06-SH</b>	10	10	-	10	125	10	10	-	CC... 0602...
	<b>1010 K09-SH</b>	10	10	-	10	125	15	10	2	CC... 09T3...
	<b>1212 K09-SH</b>	12	12	-	12	125	15	12	-	
	<b>1616 K09-SH</b>	16	16	-	16	125	16	16	-	
 90°	# SCACR/L <b>1212 K09-SH-TB</b>	12	12	3	12	125	23	12	2	
	<b>1616 K09-SH-TB</b>	16	16	-	16	125	23	16	-	


  
 A309-A312,  
 A360

• # Marked: TOP-MINI holders

## Spare parts


Designation	Screw	Cooling unit	Plug	Wrench			
							
...06-SH	SO 25065l	-	-	T 7	-		
...09-SH	SO 35080l	-	-	T 15	-		
<b>SCACR/L-SH-TB</b>	SO 35080l	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32		




• Please refer to A165 page for COOL-BURST accessories

# SCLCR/L-SH SCLCR/L-SH-TB





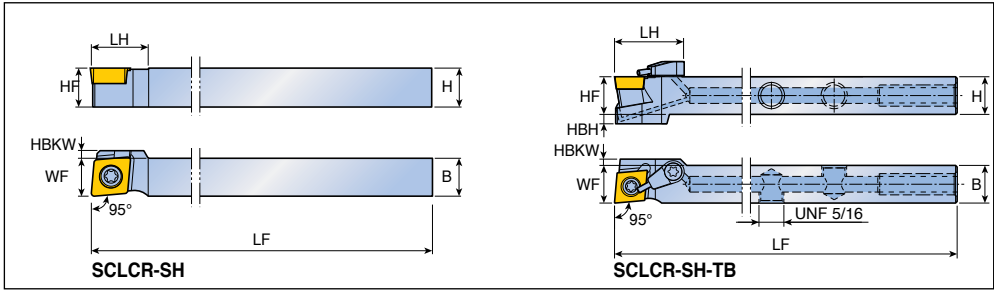


## Screw type holders



Approach angle	Designation	Dimension (mm)								Insert
		H	HF	HBH	B	LF	LH	WF	HBKW	
95° 	# SCLCR/L 0808 K06-SH	8	8	-	8	125	8	8	-	CC... 0602...
	1010 K06-SH	10	10	-	10	125	10	10	-	
	1010 K09-SH	10	10	-	10	125	15	10	2	CC... 09T3...  A309-A312, A360
	1212 K09-SH	12	12	-	12	125	15	12	-	
	1616 K09-SH	16	16	-	16	125	16	16	-	
95°  COOLBURST	# SCLCR/L 1212 K09-SH-TB	12	12	3	12	125	23	12	2	
	1616 K09-SH-TB	16	16	-	16	125	23	16	-	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
					
...06-SH	SO 25065l	-	-	T 7	-
...09-SH	SO 35080l	-	-	T 15	-
SCLCR/L-SH-TB	SO 35080l	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

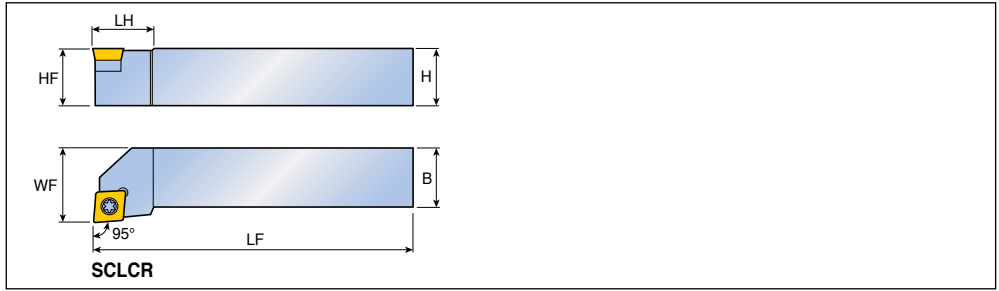


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>SCLCR/L 0808 F06</b>	8	8	8	80	10	10	CC... 0602... A309-A312, A360
	<b>1010 F06</b>	10	10	10	80	10	12	
	<b>1212 F09</b>	12	12	12	80	16	16	
	<b>1616 H09</b>	16	16	16	100	16	20	CC... 09T3... CC... 1204...
	<b>2020 K09</b>	20	20	20	125	20	25	
	<b>2525 M09</b>	25	25	25	150	20	32	
	<b>2020 K12</b>	20	20	20	125	25	25	
		<b>2525 M12</b>	25	25	25	150	26	32

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
...06	SO 25065I	-	-	T 7			
...F09	SO 35080I	-	-	T 15			
...09	SO 35124I	SSC 32	SO 50090S	T 15			
...12	SO 45130I	SSC 43N	SO 60105S	T 20			

## Screw type holders

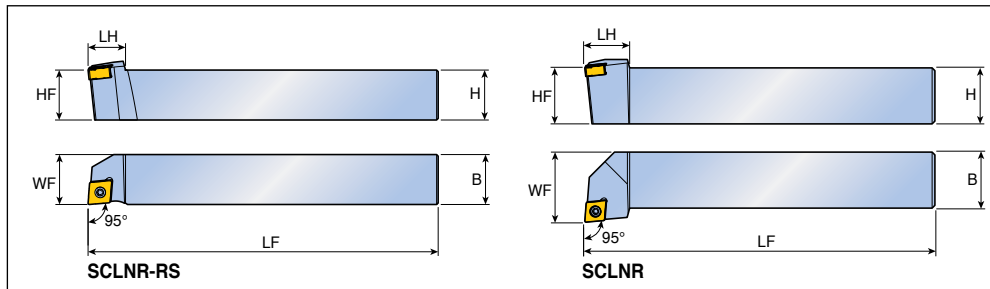






Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
95°	<b>SCLNR/L 1212 K0703-RS</b>	12	12	12	125	12	12	CNMX 0703... A275
	<b>1616 K0703-RS</b>	16	16	16	125	12	16	
95°	<b>SCLNR/L 1616 H0703</b>	16	16	16	100	12	20	
	<b>2020 K0703</b>	20	20	20	125	16	25	

## Spare parts



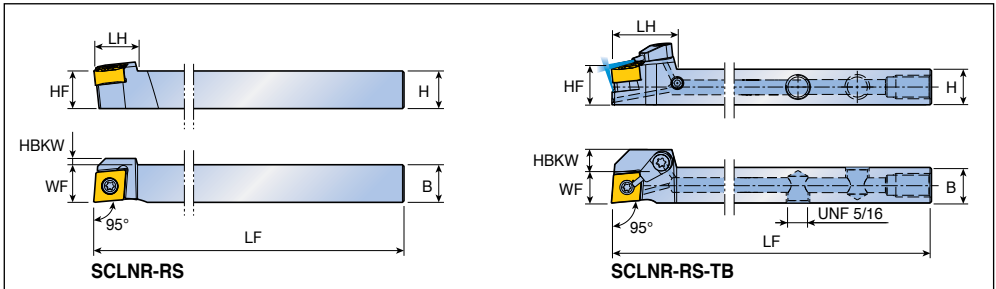


Designation	Screw	Wrench				
	...0703...	TS 25D060/HG-P	T 7P			

## Screw type holders



Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
 95°	<b>SCLNR 1212 K0904-RS</b>	12	12	12	125	14	12	2	CN... 0904  RHINOTURN A266, A268-A273
	<b>1616 K0904-RS</b>	16	16	16	125	14	16	-	
	<b>2020 K0904-RS</b>	20	20	20	125	14	20	-	
 95°	<b>SCLNR 1212 K0904-RS-TB</b>	12	12	12	125	22	12	6	COOLBURST 
	<b>1616 K0904-RS-TB</b>	16	16	16	125	22	16	2	
	<b>2020 K0904-RS-TB</b>	20	20	20	125	22	20	-	

## Spare parts


Designation	Screw	Cooling unit	Plug	Wrench			
							
<b>SCLNR-RS</b>	TS 35083I/HG	-	-	T 10	-		
<b>SCLNR-RS-TB</b>	TS 35083I/HG	S-CU-TB	PLG 5/16 UNF	T 10	L-W 5/32		





• Please refer to A165 page for COOL-BURST accessories

# SDJCR/L-SH SDJCR/L-SH-TB



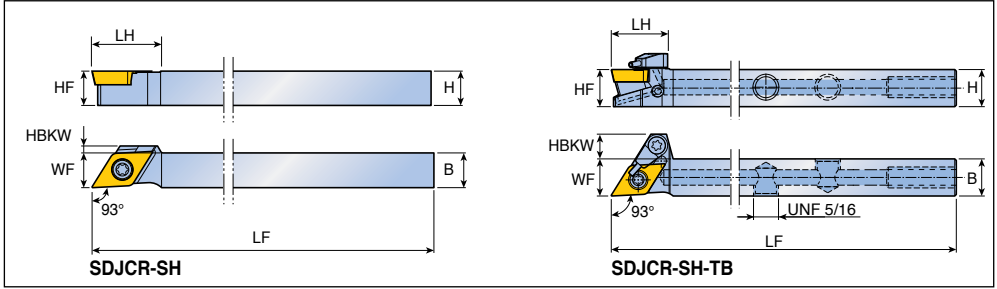




## Screw type holders



Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
<b>93°</b> 	# <b>SDJCR/L 0808 K07-SH</b>	8	8	8	125	12.7	8	-	DC... 0702...  DC... 11T3...  A314-A317, A361
	<b>1010 K07-SH</b>	10	10	10	125	15	10	-	
	<b>1010 K11-SH</b>	10	10	10	125	20	10	2	
	<b>1212 K11-SH</b>	12	12	12	125	20	12	-	
	<b>1616 K11-SH</b>	16	16	16	125	20	16	-	
	<b>2020 K11-SH</b>	20	20	20	125	20	20	-	
<b>93°</b> 	# <b>SDJCR/L 1212 K11-SH-TB</b>	12	12	12	125	19	12	8	
	<b>1616 K11-SH-TB</b>	16	16	16	125	19	16	4	
	<b>2020 K11-SH-TB</b>	20	20	20	125	20	20	-	


• # Marked: TOP-MINI holders

## Spare parts


Designation	Screw	Cooling unit	Plug	Wrench	
					
<b>...07</b>	SO 25065I	-	-	T 7	-
<b>...11-SH</b>	SO 35080I	-	-	T 15	-
<b>SDJCR/L-SH-TB</b>	SO 35080I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

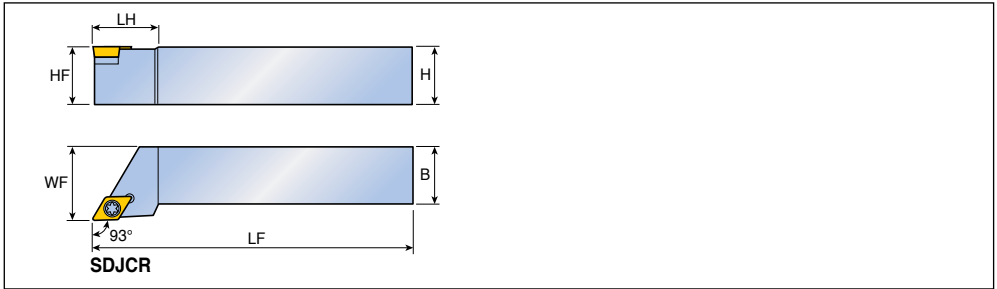


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
93°	<b>SDJCR/L 1212 F07</b>	12	12	12	80	15	16	DC... 0702... A314-A317, A361 DC... 11T3...
	<b>1616 H07</b>	16	16	16	100	15	20	
	<b>2020 K07</b>	20	20	20	125	20	25	
	<b>1616 H11</b>	16	16	16	100	24	20	
	<b>2020 K11</b>	20	20	20	125	24	25	
	<b>2525 M11</b>	25	25	25	150	28	32	



## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
...07	SO 250651	-	-	T 7				
...11	SO 351241	SSD 32	SO 50090S	T 15				

## Screw type holders

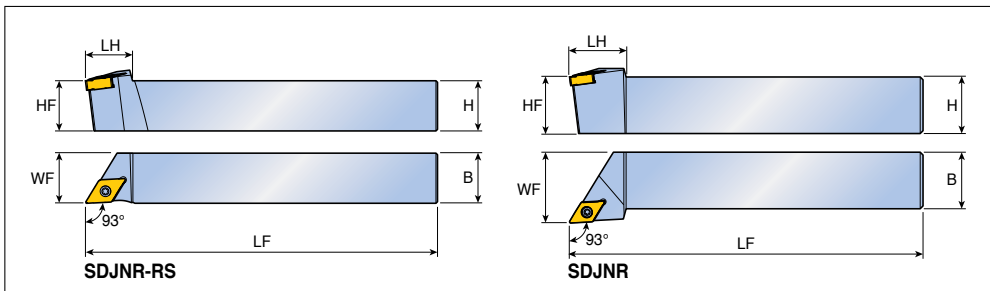


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>SDJNR/L 1212 K0803-RS</b>	12	12	12	125	15	12	DN...X 0803...   A276, A281
	<b>1616 K0803-RS</b>	16	16	16	125	15	16	
<b>93°</b> 	<b>SDJNR/L 1616 H0803</b>	16	16	16	100	16	20	DN... 1104...  A276-A278, A280
	<b>2020 K0803</b>	20	20	20	125	20	25	
	<b>SDJNR/L 1616 H11</b>	16	16	16	100	25	20	
	<b>2020 K11</b>	20	20	20	125	25	25	
	<b>2525 M11</b>	25	25	25	150	25	32	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
...0803...	TS 25D060/HG-P	-	-	T 7P			
...1104...	SO 35120I	SSD 32	SO 50090S	T 10			

## Screw type holders

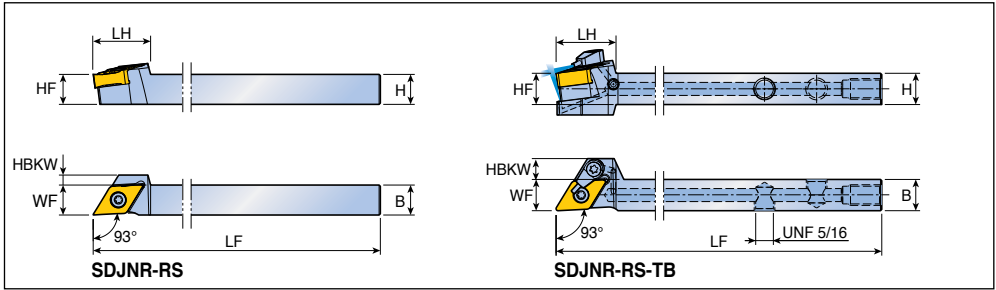


Approach angle	Designation	Dimension (mm)							Insert	
		H	HF	B	LF	LH	WF	HBKW		
<b>93°</b> 	<b>SDJNR 1212 K1305-RS</b>	12	12	12	125	23	12	4	DN... 1305...  A276-A281	
	<b>1616 K1305-RS</b>	16	16	16	125	23	16	-		
	<b>2020 K1305-RS</b>	20	20	20	125	23	20	-		
<b>93°</b>  COOLBURST	<b>SDJNR 1212 K1305-RS-TB</b>	12	12	12	125	23	12	8		
	<b>1616 K1305-RS-TB</b>	16	16	16	125	23	16	4		





## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench				
<b>SDJNR-RS</b>	TS 40G110I	-	-	T 15	-			
<b>SDJNR-RS-TB</b>	TS 40G110I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32			

• Please refer to A165 page for COOL-BURST accessories

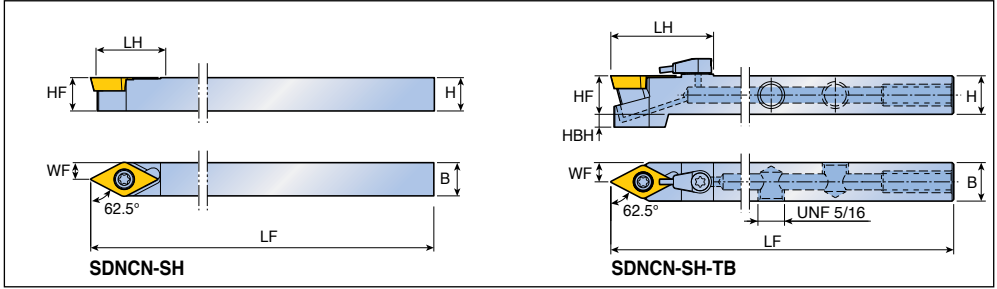




## Screw type holders



Approach angle	Designation	Dimension (mm)							Insert
		H	HF	HBH	B	LF	LH	WF	
<b>62.5°</b> 	# SDNCN 0808 K07-SH	8	8	-	8	125	15	4	DC... 0702...  DC... 11T3...  A314-A317, A361
	1010 K07-SH	10	10	-	10	125	15	5	
	1010 K11-SH	10	10	-	10	125	22	5	
	1212 K11-SH	12	12	-	12	125	22	6	
	1616 K11-SH	16	16	-	16	125	22	8	
<b>62.5°</b>  COOLBURST	# SDNCN 1212 K11-SH-TB	12	12	4	12	125	32	6	
	1616 K11-SH-TB	16	16	-	16	125	32	8	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench				
...07	SO 25065I 	- 	- 	T 7 	- 			
...11-SH	SO 35080I	-	-	T 7	-			
SDNCN-SH-TB	SO 35080I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32			

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

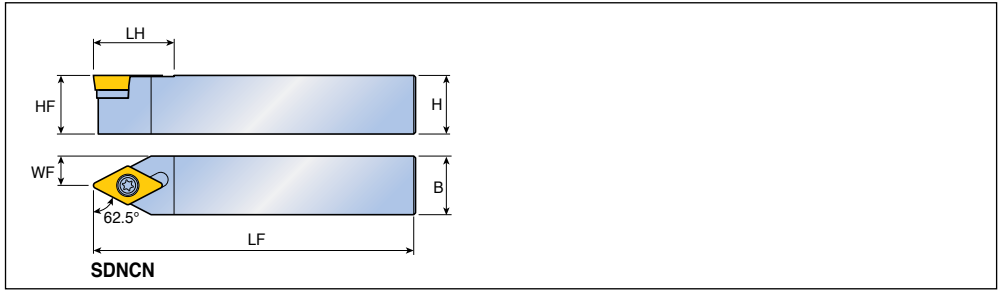


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
62.5°	<b>SDNCN 0808 F07</b>	8	8	8	80	15	4	DC... 0702... A314-A317, A361
	<b>1010 F07</b>	10	10	10	80	15	5	
	<b>1616 H11</b>	16	16	16	100	22	8	
	<b>2525 M11</b>	25	25	25	150	22	12.5	


## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
...07	SO 25065I	-	-	T 7			
...11	SO 35124I	SSD 32	SO 50090S	T 15			

## Screw type holders

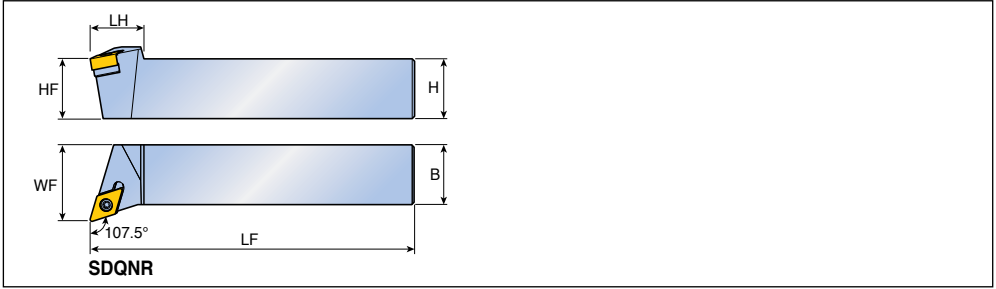


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>107.5°</b>	<b>SDQNR/L 1616 H11</b>	16	16	16	100	22	20	DN... 1104...  A276-A278, A280
	<b>2020 K11</b>	20	20	20	125	22	25	
	<b>2525 M11</b>	25	25	25	150	22	32	



## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
...11	SO 35120I	SSD 32	SO 50090S	T 10				

## Screw type holders for FCMX high feed inserts

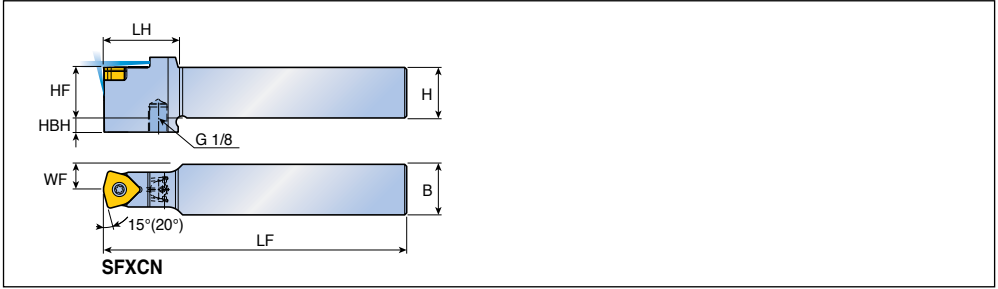


Approach angle	Designation	Dimension (mm)								Insert
		H	HF	B	LF	LH	WF	HBH		
<b>15°</b>	<b>SFXCN 2525 M1006</b>	25	25	25	150	37	12.5	7	FCMX 1006... A319	
	<b>3232 P1006</b>	32	32	32	170	37	16	-		
<b>15°</b>										
<b>20°</b>										

## Spare parts

Designation	Screw	Wrench					
<b>...1006</b>	SO 45130I	T 20					

## Screw type holders

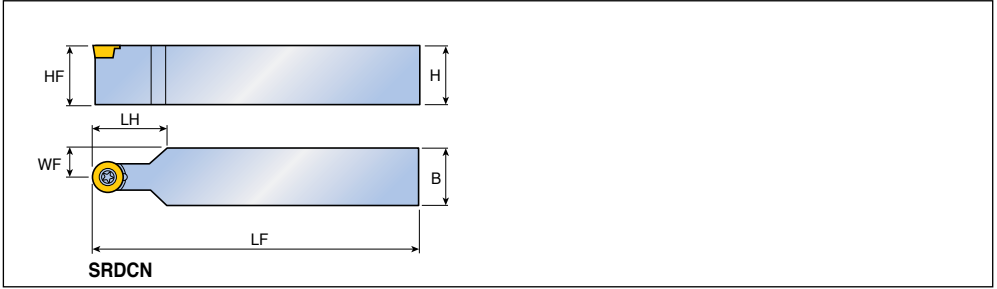

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
45°	SRDCN 1616 H10	16	16	16	100	17.2	8	RC...T 10T3... A320
	2020 K10	20	20	20	125	22.5	10	
	2525 M10	25	25	25	150	27.5	12.5	
	2525 M12	25	25	25	150	27.5	12.5	


## Spare parts




Designation	Screw	Wrench					
...10	TS 40097I	T 15					
...12	SO 40050I	T 15					

# SRGCR/L SRGCR/L-TB





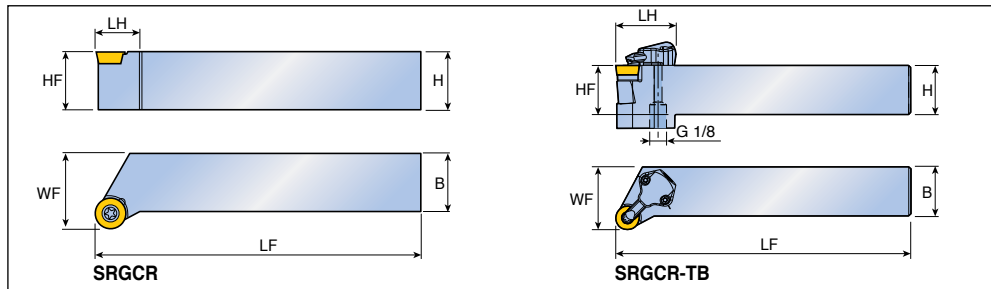





## Screw type holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
90° 	<b>SRGCR/L 1616 H10</b>	16	16	16	100	12.3	20	RC...T 10T3...  A320
	<b>2020 K10</b>	20	20	20	125	14	25	
	<b>2525 M10</b>	25	25	25	150	14	32	
90°  COOLBURST	<b>SRGCR/L 2525 M12-TB</b>	25	25	25	150	30	32	RC...T 1204...

## Spare parts

Designation	Screw	Shim	Shim screw	Cooling unit	O-ring	Plug	Wrench	
...10	 TS 400971	 -	 -	 -	 -	 -	 T 15	 -
<b>SRGCR/L...TB</b>	TS 351101	SSR 32	TS 5035062S	CU-R-TB	ID 6.4x0.9	SS M4x0.7x4-NL	T 8, T 15	L-W 2, L-W 3.5

• Please refer to A164 page for COOL-BURST accessories

## Screw type holders

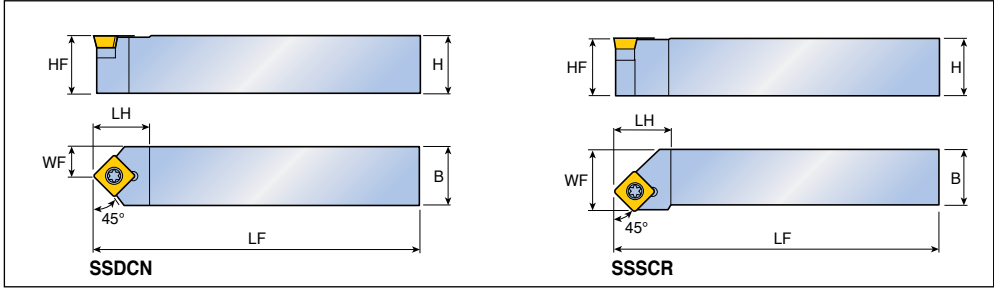


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
45°	<b>SSDCN 1212 F09</b>	12	12	12	80	15.5	6	SC... 09T3... A321, A362
	<b>1616 H09</b>	16	16	16	100	15.5	8	
45°	<b>SSSCR/L 1212 F09</b>	12	12	12	80	15.5	14	SC... 09T3...
	<b>1616 H09</b>	16	16	16	100	15.5	17	
	<b>2020 K12</b>	20	20	20	125	24	22	SC... 1204... A321
	<b>2525 M12</b>	25	25	25	150	24	27	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
<b>...F09</b>	SO 35080I	-	-	T 15			
<b>...H09</b>	SO 35124I	SSS 32	SO 50090S	T 15			
<b>...12</b>	SO 45130I	SSS 43N	SO 60105S	T 20			

## Screw type holders

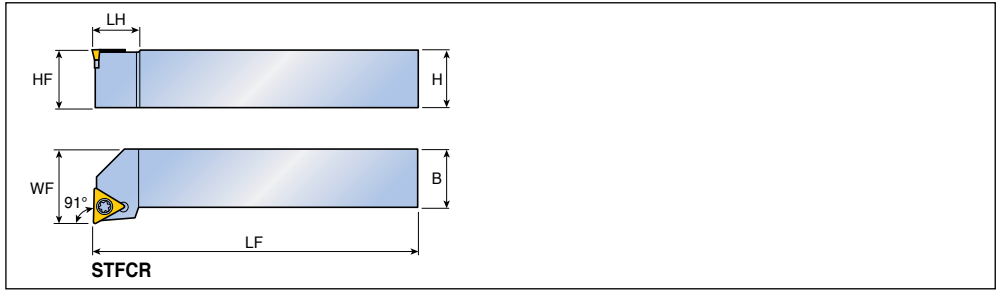

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
91°	<b>STFCR/L 1212 F11</b>	12	12	12	80	14	16	TC... 1102...
	<b>1616 H11</b>	16	16	16	100	14	20	
	<b>1616 H16</b>	16	16	16	100	19	20	A363, A364
	<b>2020 K16</b>	20	20	20	125	19	25	
	<b>2525 M16</b>	25	25	25	150	20	32	


## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
...11	SO 25065I	-	-	T 7				
...16	SO 35124I	SST 32	SO 50090S	T 15				

# STGCR/L-SH STGCR/L-SH-TB



## Screw type holders

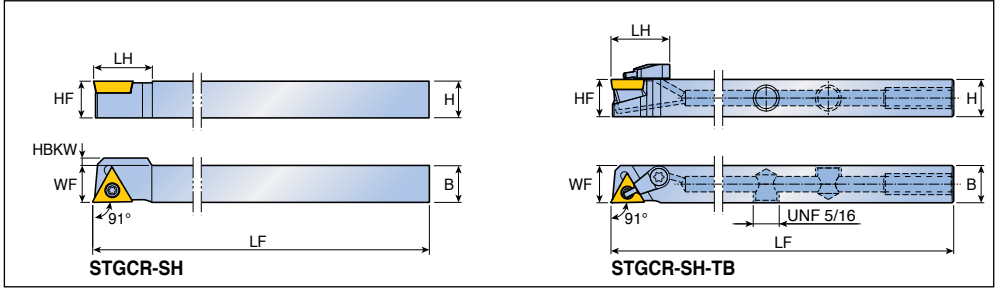

Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
 91°	# <b>STGCR/L 0808 E08-SH</b>	8	8	8	70	11	8	2	TC...T 0802... TC... 1103... A324, A363, A364
	<b>1010 F08-SH</b>	10	10	10	80	11	10	-	
	<b>1010 K11-SH</b>	10	10	10	125	16	10	2	
	<b>1212 K11-SH</b>	12	12	12	125	16	12	-	
	<b>1616 K11-SH</b>	16	16	16	125	16	16	-	
 91°	# <b>STGCR/L 1212 K11-SH-TB</b>	12	12	12	125	20	12	-	
	<b>1616 K11-SH-TB</b>	16	16	16	125	20	16	-	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench			
<b>...08-SH</b>	TS 20043I/HG-P	-	-	T 6P	-		
<b>...11-SH</b>	SO 25065I	-	-	T 7	-		
<b>STGCR/L-SH-TB</b>	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32		

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

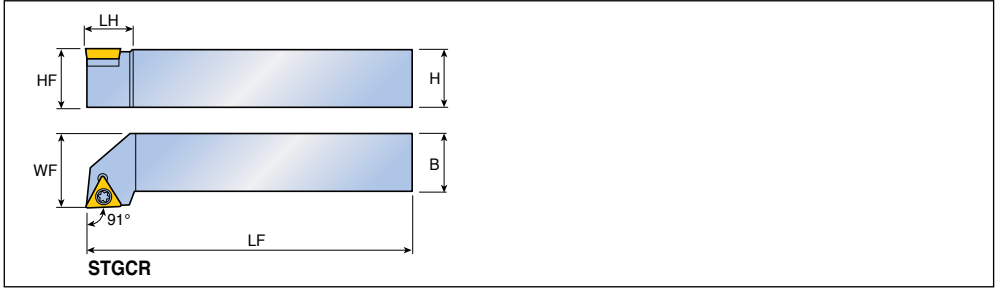


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>STGCR/L 0808 E08</b>	8	8	8	70	10	10	TC...T 0802...
	<b>1010 F08</b>	10	10	10	80	10	12	 A324, A325, A363, A364
	<b>1010 E09</b>	10	10	10	70	11	12	
	<b>1212 F11</b>	12	12	12	80	14.3	16	TC...T 0902...
	<b>1616 H11</b>	16	16	16	100	14.3	20	TC...T 1102...
	<b>1616 H16</b>	16	16	16	100	21	20	TC...T 16T3...
	<b>2020 K16</b>	20	20	20	125	21	25	
	<b>2525 M16</b>	25	25	25	150	21	32	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
...09	SO 22050I	-	-	T 7			
...11	SO 25065I	-	-	T 7			
...16	SO 35124I	SST 32	SO 50090S	T 15			

## Screw type holders

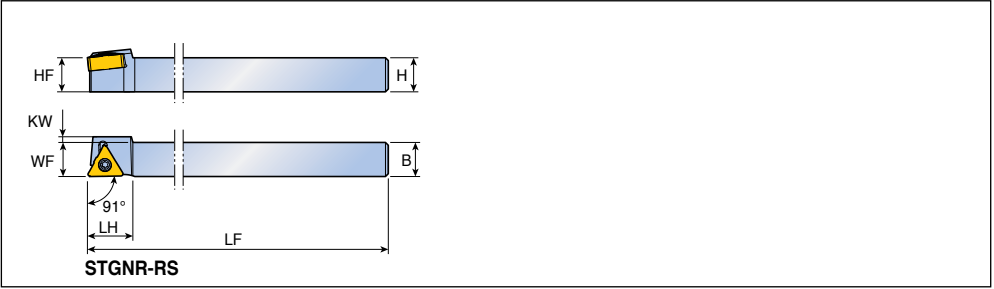





Approach angle	Designation	Dimension (mm)								Insert
		H	HF	B	LF	LH	WF	HBKW		
91°	<b>STGNR 1212 K1304-RS</b>	12	12	12	125	16	12	2	TN... 1304... A291-A296	
	<b>1616 K1304-RS</b>	16	16	16	125	16	16	-		
	<b>2020 K1304-RS</b>	20	20	20	125	16	20	-		

## Spare parts

Designation	Screw	Wrench					
<b>STGNR-RS</b>	TS 300801/HG	T 9					



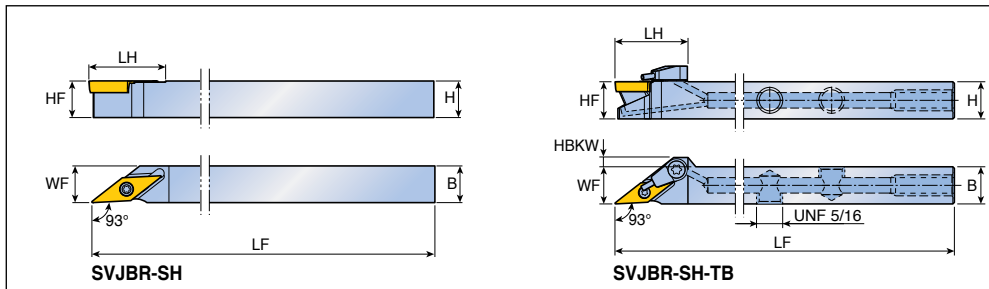


## Screw type holders



Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
<b>93°</b> 	# SVJBR/L <b>1010 K11-SH</b>	10	10	10	125	21	10	-	VB... 1103...  A330, A331, A365
	<b>1212 K11-SH</b>	12	12	12	125	21	12	-	
	<b>1616 K11-SH</b>	16	16	16	125	21	16	-	
<b>93°</b> 	# SVJBR/L <b>1212 K11-SH-TB</b>	12	12	12	125	23.6	12	3	
	<b>1616 K11-SH-TB</b>	16	16	16	125	23.6	16	-	


• # Marked: TOP-MINI holders




## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench			
							
...11	SO 25065I	-	-	T 7	-		
<b>SVJBR/L-SH-TB</b>	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32		

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

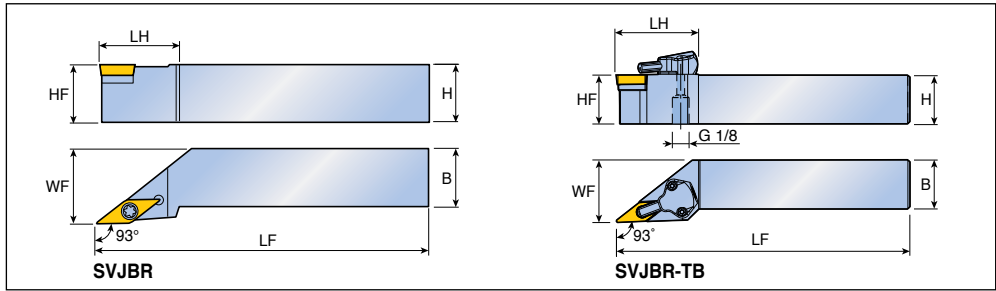


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>SVJBR/L 2020 K16</b>	20	20	20	125	35	25	VB... 1604...  A330, A331, A365
	<b>2525 M16</b>	25	25	25	150	35	32	
	<b>3225 P16</b>	32	32	25	170	35	32	
	<b>3232 P16</b>	32	32	32	170	35	40	
<b>93°</b>  COOLBURST	<b>SVJBR/L 2525 M16-TB</b>	25	25	25	150	42	32	

## Spare parts

Designation	Screw	Shim	Shim screw	Cooling unit	O-ring	Wrench	
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	-	-	T 15	-
<b>SVJBR/L-TB</b>	SO 35124I	SSV 32	TS 5035062S	CU-V-TB	ID 6.4x0.9	T 8, T 15	L-W 3.5

• Please refer to A164 page for COOL-BURST accessories

## Screw type holders

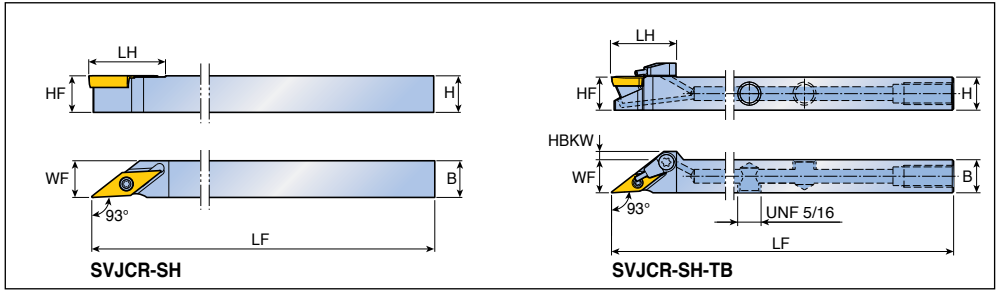

Approach angle	Designation	Dimension (mm)							Inserts
		H	HF	B	LF	LH	WF	HBKW	
<p>93°</p>	# SVJCR/L 1010 K11-SH	10	10	10	125	21	10	-	VC... 1103... A332, A333
	1212 K11-SH	12	12	12	125	21	12	-	
	1616 K11-SH	16	16	16	125	21	16	-	
	2020 K11-SH	20	20	20	125	21	20	-	
<p>93°</p> <p>COOLBURST</p>	# SVJCR/L 1212 K11-SH-TB	12	12	12	125	23.6	12	3	
	1616 K11-SH-TB	16	16	16	125	23.6	16	-	
	2020 K11-SH-TB	20	20	20	125	23.6	20	-	


• # Marked: TOP-MINI holders

## Spare parts


Designation	Screw	Cooling unit	Plug	Wrench			
...11-SH	SO 25065I	-	-	T 7	-		
SVJCR/L-SH-TB	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32		

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

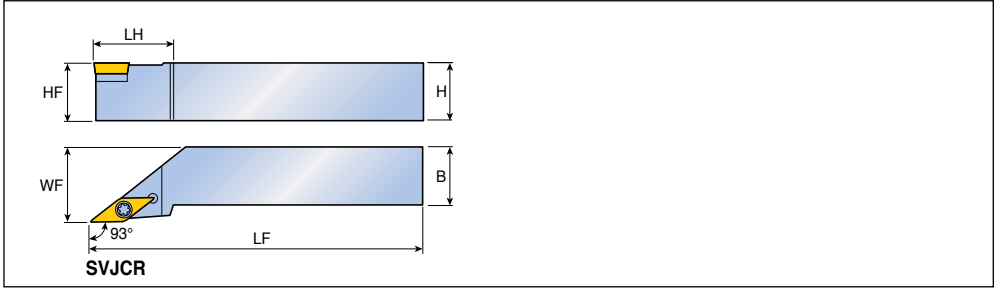


Approach angle	Designation	Dimension (mm)						Inserts
		H	HF	B	LF	LH	WF	
93°	<b>SVJCR/L 2020 K16</b>	20	20	20	125	35	25	VC... 1604...  A332, A333
	<b>2525 M16</b>	25	25	25	150	35	32	
	<b>3225 P16</b>	32	32	25	170	35	32	
	<b>3232 P16</b>	32	32	32	170	47	40	






## Spare parts



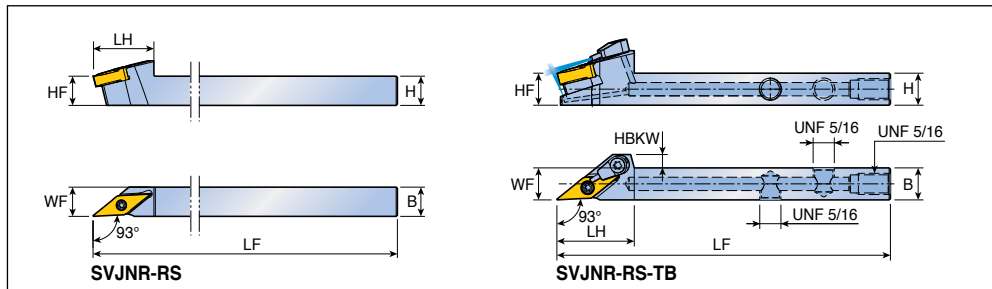


Designation	Screw	Shim	Shim screw	Wrench			
...16	SO 35124I	SSV 32	SO 50090S	T 10			

## Screw type holders




Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
<b>93°</b> 	<b>SVJNR 1212 K1304-RS</b>	12	12	12	125	25	12	-	VN...X 1304... YNMG 1304...  A297, A299, A305
	<b>1616 K1304-RS</b>	16	16	16	125	25	16	-	
	<b>2020 K1304-RS</b>	20	20	20	125	25	20	-	
<b>93°</b> 	<b>SVJNR 1212 K1305-RS-TB</b>	12	12	12	125	29	12	5	
	<b>1616 K1305-RS-TB</b>	16	16	16	125	29	16	1	

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench			
							
<b>SVJNR-RS</b>	TS 300801/HG	-	-	T 9	-		
<b>SVJNR-RS-TB</b>	TS 300801/HG	S-CU-TB	PLG 5/16 UNF	T 9	L-W 5/32		

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

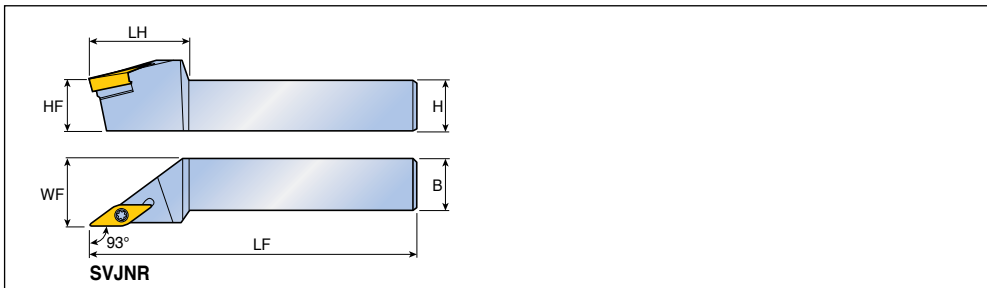


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>SVJNR/L 1616 H13</b>	16	16	16	100	30	20	VN... 1304... A297, A298
	<b>2020 K13</b>	20	20	20	125	35	25	
	<b>2525 M13</b>	25	25	25	150	43	32	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
<b>...13</b>	SO 35120I	SSVN 2.522	TS 5035062S	T 10	L-W 3.5			

## Screw type holders

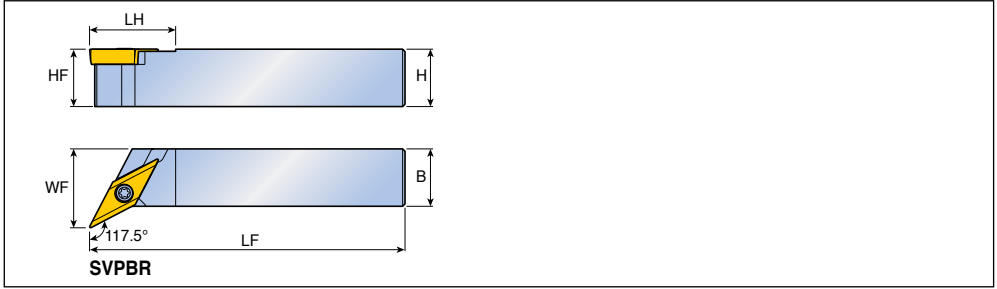





Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>117.5</b> 	<b>SVPBR/L 1010 E11</b>	10	10	10	70	18	14.5	VB... 1103...  A330, A331, A365
	<b>1212 F11</b>	12	12	12	80	18	16.5	
	<b>1616 F11</b>	16	16	16	80	18	20.5	
	<b>2020 K11</b>	20	20	20	125	18	25	
	<b>2525 M11</b>	25	25	25	150	18	32	VB... 1604...
	<b>2020 K16</b>	20	20	20	125	25	25	
	<b>2525 M16</b>	25	25	25	150	25	32	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
<b>...11</b>	SO 25065I	-	-	T 7	-			
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	T 15	L-W 3.5			



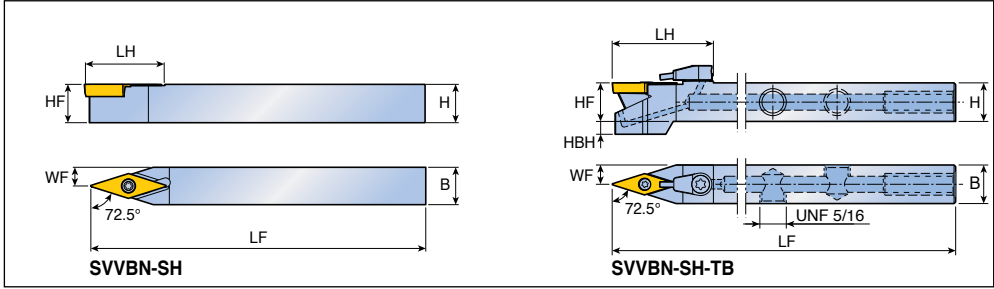


## Screw type holders



Approach angle	Designation	Dimension (mm)							Insert
		H	HF	HBH	B	LF	LH	WF	
72.5° 	# <b>SVVBN 1010 K11-SH</b>	10	10	-	10	125	22	5	VB... 1103...  A330, A331, A365
	<b>1212 K11-SH</b>	12	12	-	12	125	22	6	
	<b>1616 K11-SH</b>	16	16	-	16	125	22	8	
72.5°  COOLBURST	# <b>SVVBN 1212 K11-SH-TB</b>	12	12	2	12	125	31.5	6	
	<b>1616 K11-SH-TB</b>	16	16	-	16	125	31.5	8	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench				
								
...11	SO 25065I	-	-	T 7	-			
<b>SVVBN-SH-TB</b>	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32			

• Please refer to A165 page for COOL-BURST accessories

## Screw type holders

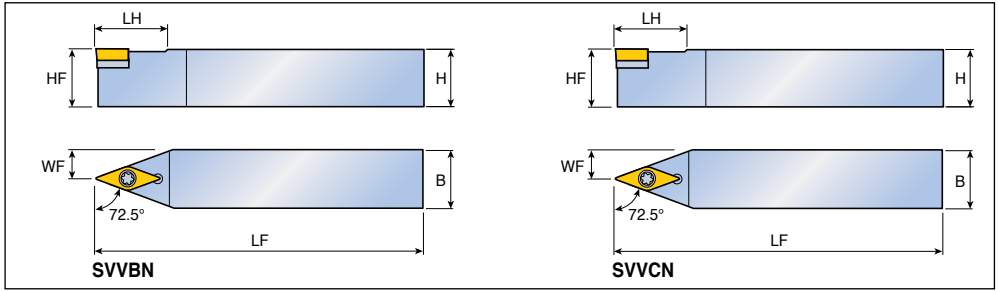


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>72.5°</b> 	<b>SVBNC 2020 K16</b>	20	20	20	125	31.5	10.0	VB... 1604...  A330, A331, A365
	<b>2525 M16</b>	25	25	25	150	31.5	12.5	
	<b>3225 P16</b>	32	32	25	170	31.5	12.5	
<b>72.5°</b> 	<b>SVVCN 2020 K16</b>	20	20	20	125	31.5	10.0	VC...T 1604...
	<b>2525 M16</b>	25	25	25	150	31.5	12.5	
	<b>3225 P16</b>	32	32	25	170	31.5	12.5	
	<b>3232 P16</b>	32	32	32	170	32	16.0	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	T 15			

## Screw type holders

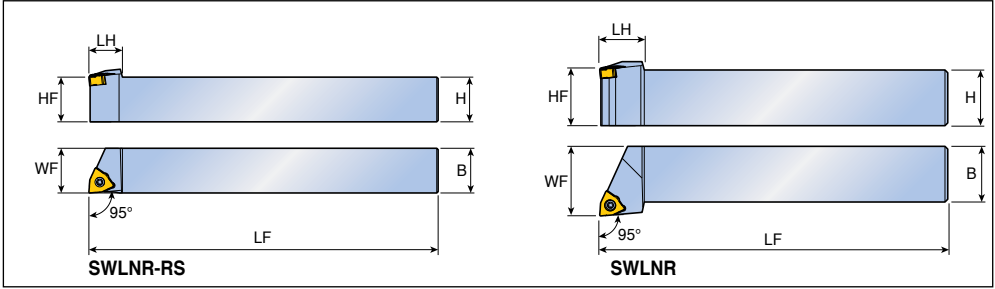


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
95°	<b>SWLNR/L 1212 K0403-RS</b>	12	12	12	125	12	12	WNMX 0403... A303
	<b>1616 K0403-RS</b>	16	16	16	125	12	16	
95°	<b>SWLNR/L 1616 H0403</b>	16	16	16	100	16	20	
	<b>2020 K0403</b>	20	20	20	125	16	25	

## Spare parts

Designation	Screw	Wrench					
	...0403...	TS 25D060/HG-P	T 7P				

## Screw type back turning holders

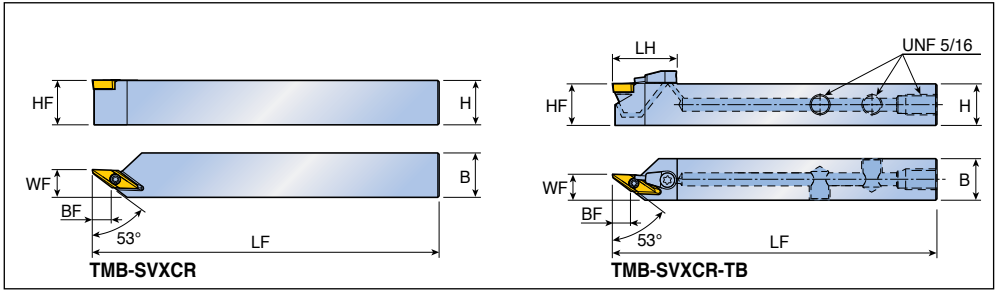

Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	BF	
53°	# TMB-SVXCR 1212 K11	12	12	12	125	-	10	7.2	BTVC 1103... A308
	1616 K11	16	16	16	125	-	10	7.2	
53°	# TMB-SVXCR 1212 K11-TB	12	12	12	125	25	10	7.2	
	1616 K11-TB	16	16	16	125	25	10	7.2	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
TMB-SVXCR	SO 25065I	-	-	T 7	-
TMB-SVXCR-TB	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Sleeve holders

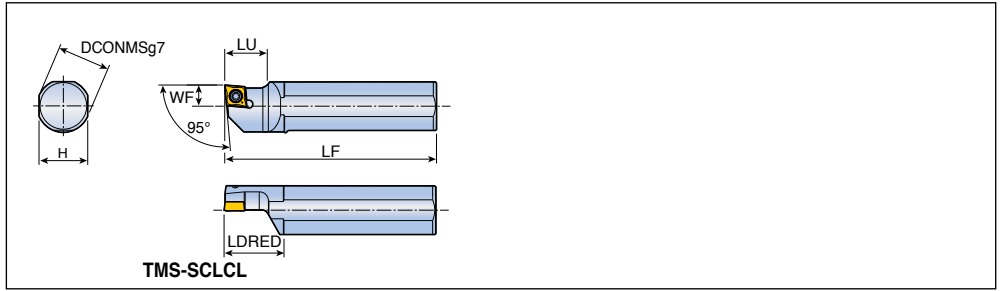


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LU	LDRED	WF	
95°	# TMS-19.05H SCLCL 09	19.05	17	100	20	28	10	CC... 09T3...  A309-A312, A360
	20H SCLCL 09	20	18	100	20	28	10	
	22H SCLCL 09	22	20	100	20	28	10	
	25H SCLCL 09	25	23	100	20	28	10	

• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Wrench				
TMS-SCLCL	SO 35080I	T 15				

## Sleeve holders

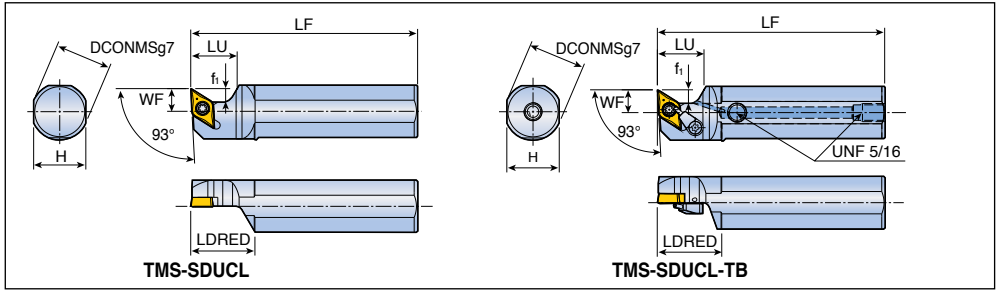

Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	f <sub>1</sub>	LU	LDRED	WF	
<b>93°</b> 	# <b>TMS-16X SDUCL 11</b>	16	15	85	6	20	28	10	DC... 11T3...  A314-A317, A361
	<b>19.05H SDUCL 11</b>	19.05	17	100	6	20	28	10	
	<b>20H SDUCL 11</b>	20	18	100	6	20	28	10	
	<b>22H SDUCL 11</b>	22	20	100	6	20	28	10	
	<b>25H SDUCL 11</b>	25	23	100	6	20	28	10	
<b>93°</b> 	# <b>TMS-16X SDUCR 11- TB</b>	16	15	85	6	20	28	10	
	<b>19.05H SDUCL 11-TB</b>	19.05	17	100	6	20	28	10	
	<b>20H SDUCL 11-TB</b>	20	18	100	6	20	28	10	
	<b>22H SDUCL 11-TB</b>	22	20	100	6	20	28	10	
	<b>25H SDUCL 11-TB</b>	25	23	100	6	20	28	10	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
<b>TMS-SDUCL</b>	SO 35080I	-	-	T 15	-
<b>TMS-SDUCL-TB</b>	SO 35080I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Sleeve holders

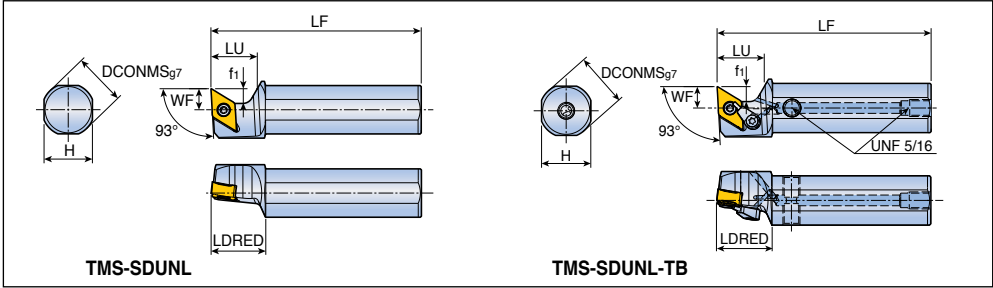


Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	f1	LU	LDRED	WF	
 93°	<b>TMS- 16X SDUNL 1305</b>	16	15	85	7	22	26	10	DN...1305...
	<b>19.05H SDUNL 1305</b>	19.05	17	100	7	22	26	10	
	<b>20H SDUNL 1305</b>	20	18	100	7	22	26	10	 A276-A281
	<b>22H SDUNL 1305</b>	22	20	100	7	22	26	10	
	<b>25H SDUNL 1305</b>	25	23	100	7	22	26	10	
 93°	<b>TMS- 25H SDUNL 1305-TB</b>	25	23	100	7	22	26	10	




## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
<b>TMS-SDUNL</b>	TS 40G110I	-	-	T 15	-
<b>TMS-SDUNL-TB</b>	TS 40G110I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories



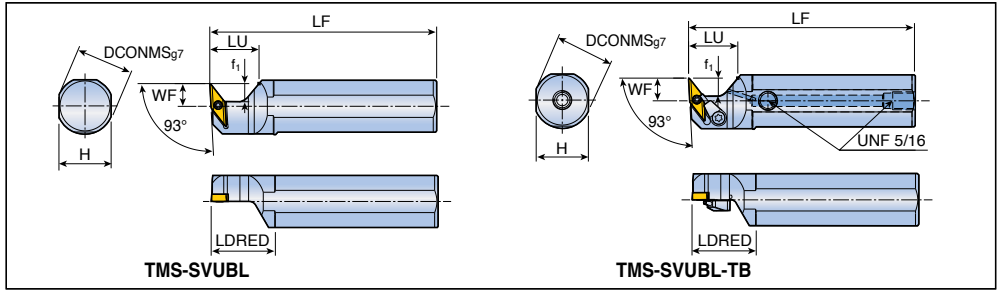


## Sleeve holders



Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	f <sub>1</sub>	LU	LDRED	WF	
 93°	# TMS- 19.05H SVUBL 11	19.05	17	100	8	21	25	10	VB... 1103...  A330, A331, A365
	20H SVUBL 11	20	18	100	8	21	25	10	
	22H SVUBL 11	22	20	100	8	21	25	10	
	25H SVUBL 11	25	23	100	8	21	28	10	
 93°	# TMS- 16X SVUBR 11-TB	16	15	85	8	21	25	10	
	19.05H SVUBL 11-TB	19.05	17	100	8	21	25	10	
	20H SVUBL 11-TB	20	18	100	8	21	25	10	
	22H SVUBL 11-TB	22	20	100	8	21	25	10	
	25H SVUBL 11-TB	25	23	100	8	21	28	10	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
					
TMS-SVUBL	SO 25065I	-	-	T 7	-
TMS-SVUBR/L-TB	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Y-axis holders

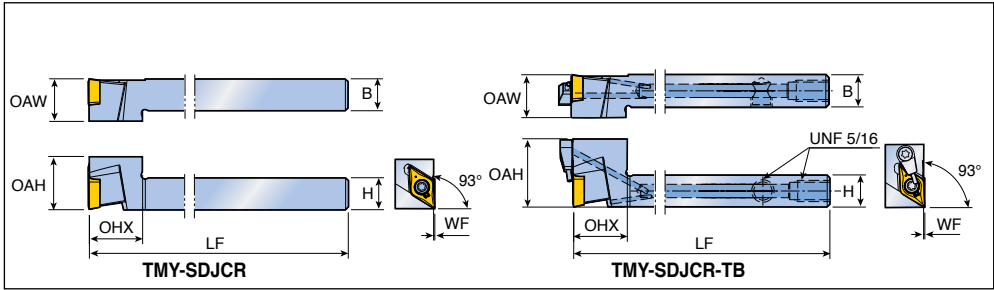

Approach angle	Designation	Dimension (mm)							Insert
		H	B	LF	OHX	OAH	OAW	WF	
<b>93°</b>  27° max. 	# TMY- SDJCR 1212 K11	12	12	125	21	20	16	0	DC... 11T3...  A314-A317, A361
	SDJCR 1616 K11	16	16	125	21	20	16	0	
<b>93°</b>  27° max. COOLBURST 	# TMY- SDJCR 1212 K11-TB	12	12	125	21	25.5	16	0	
	SDJCR 1616 K11-TB	16	16	125	21	25.5	16	0	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
TMY-SDJCR	SO 35080I	-	-	T 15	-
TMY-SDJCR-TB	SO 35080I	S-CU-TB	PLG 5/16 UNF	T 15	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Y-axis holders

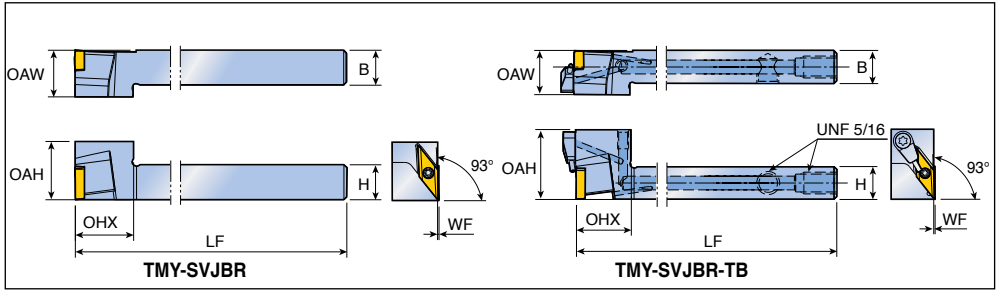

Approach angle	Designation	Dimension (mm)							Insert
		H	B	LF	OHX	OAH	OAW	WF	
<b>93°</b>  	# <b>TMY-SVJBR 1212 K11</b>	12	12	125	20	20	16	0	VB... 1103...  A330, A331, A365
	<b>SVJBR 1616 K11</b>	16	16	125	20	20	16	0	
<b>93°</b>  	# <b>TMY-SVJBR 1212 K11-TB</b>	12	12	125	20	25.5	16	0	VB... 1103...  A330, A331, A365
	<b>SVJBR 1616 K11-TB</b>	16	16	125	20	25.5	16	0	


• # Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Cooling unit	Plug	Wrench	
<b>TMY-SVJBR</b>	SO 25065I	-	-	T 7	-
<b>TMY-SVJBR-TB</b>	SO 25065I	S-CU-TB	PLG 5/16 UNF	T 7	L-W 5/32

• Please refer to A165 page for COOL-BURST accessories

## Shift holders

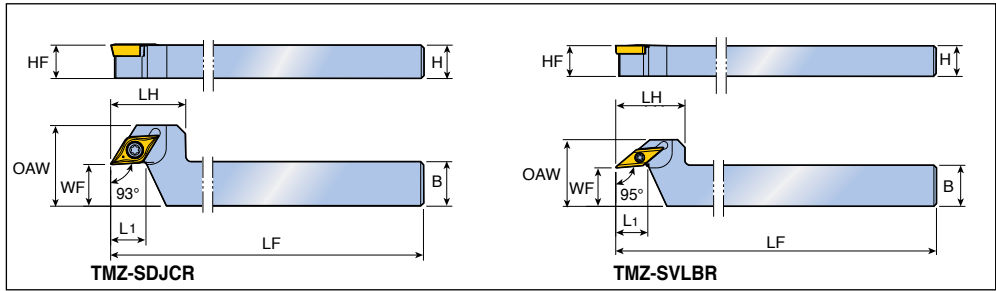


Approach angle	Designation	Dimension (mm)								Insert
		H	HF	B	LF	L1	OAW	LH	WF	
<b>93°</b> 	# TMZ- SDJCR 1216 K11-F15	12	12	16	125	12.5	29	27	15	DC... 11T3...  A314-A317, A361
	SDJCR 1620 K11-F15	16	16	20	125	16.3	29	30	15	
<b>95°</b> 	# TMZ- SVLBR 1216 K11-F15	12	12	16	125	12.3	26	27	15	VB... 1103...  A330, A331, A365
	SVLBR 1620 K11-F15	16	16	20	125	16.2	26	30	15	

# Marked: TOP-MINI holders

## Spare parts

Designation	Screw	Wrench				
TMZ-SDJCR	SO 35080I	T 15				
TMZ-SVLBR	SO 25065I	T 7				

## T-holders

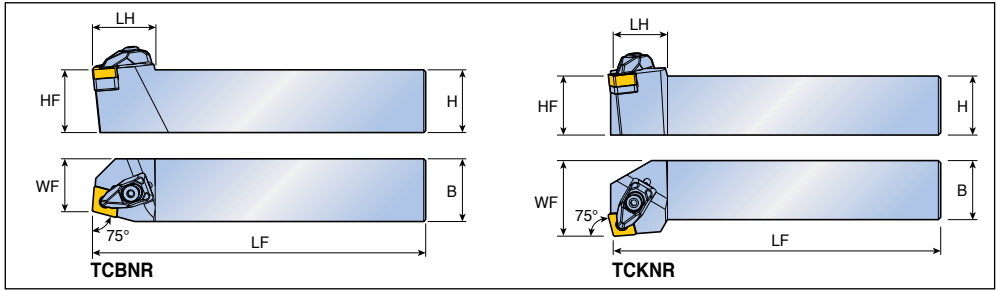


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
75°	<b>TCBNR/L 2525 M12</b>	25	25	25	150	32	22.5	CN... 1204...
	<b>3232 P19</b>	32	32	32	170	42	27	CN... 1906...
75°								
75°	<b>TCKNR/L 2525 M12</b>	25	25	25	150	25	32	CN... 1204...

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw		Wrench	
...12	DLM 4	DLS 4	DSP 4	TSC 44	SO 40050I	-	L-W 3	T 15
...19	DLM 6	DLS 5	DSP 5	LSC 63	-	SO 80180I	L-W 4	-

## T-holders

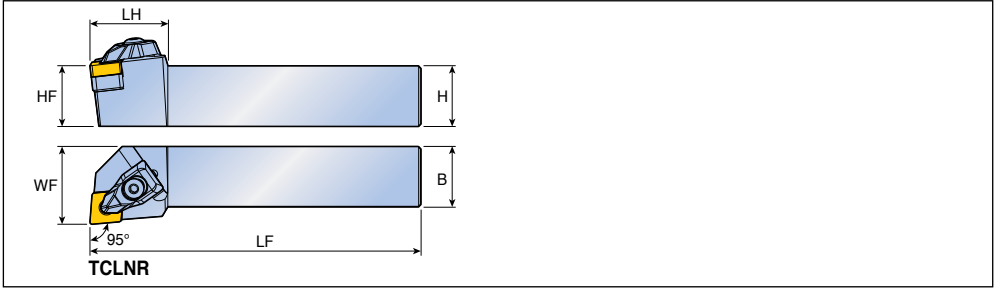


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<p style="text-align: center;"><b>95°</b></p>	<b>TCLNR/L 2020 H0904</b>	20	20	20	100	25	25	CN... 0904... A266, A268-A273
	<b>2020 K0904</b>	20	20	20	125	25	25	
	<b>2525 M0904</b>	25	25	25	150	25	32	
	<b>TCLNR/L 2020 K12</b>	20	20	20	125	32	25	CN... 1204...
	<b>2525 M12</b>	25	25	25	150	32	32	
	<b>3225 P12</b>	32	32	25	170	32	32	
	<b>3232 P12</b>	32	32	32	170	32	40	
	<b>2525 M16</b>	25	25	25	150	36	32	CN... 1606...
	<b>3232 P16</b>	32	32	32	170	36	40	
	<b>3232 P19</b>	32	32	32	170	42	40	CN... 1906...
<b>4040 S19</b>	40	40	40	250	42	50		

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw		Wrench	
<b>...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSC 32A	SO 40085I	-	L-W 2.5	T 15
<b>...12</b>	DLM 4	DLS 4	DSP 4	TSC 44	SO 40050I	-	L-W 3	T 15
<b>...16</b>	DLM 5	DLS 5	DSP 5	TSC 54	SO 50090I	-	L-W 4	T 20
<b>...19</b>	DLM 6	DLS 5	DSP 5	LSC 63	-	SO 80180I	L-W 4	-

## T-holders with high pressure coolant

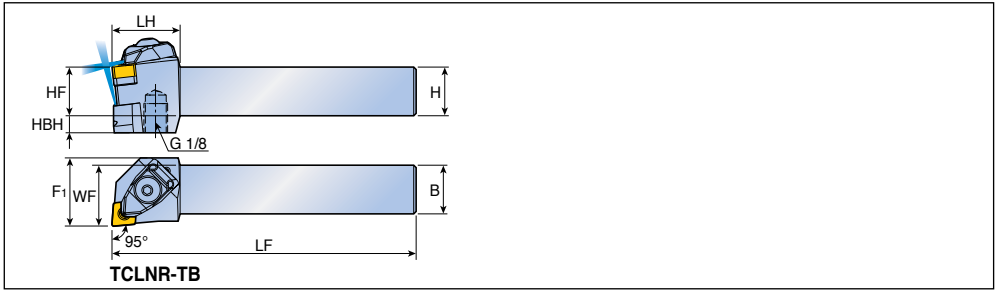


Approach angle	Designation	Dimension (mm)								Insert
		H	HF	B	LF	LH	WF	HBH	F1	
95°	<b>TCLNR/L 2020 K0904-TB</b>	20	20	20	125	28	25	7	28	CN... 0904...  A266, A268-A273
	<b>2525 M0904-TB</b>	25	25	25	150	28	32	7	32	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Upper O-ring	Lower O-ring	Shim	Shim screw	Wrench	
<b>TCLNR/L-TB</b>	DLM 3-NX-TB	BH M4x0.7x 16-TB	DSP 3	O-RING ID4.47x 1.78	O-RING ID6.07x 1.78	LSC 32A	SO 40085I	L-W 3	T 15

• Please refer to A164 page for COOL-BURST accessories

## T-holders

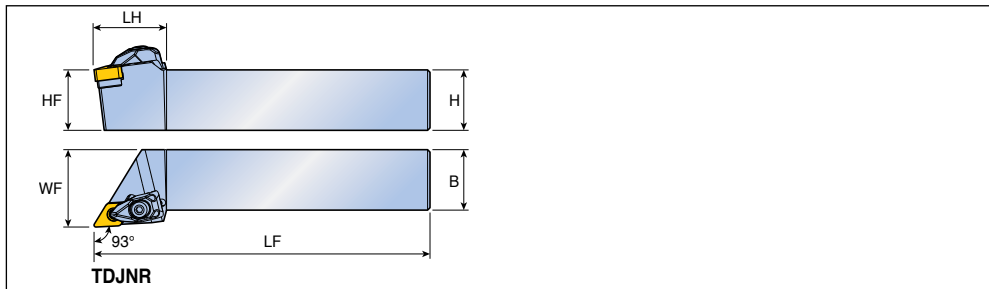


Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF		
 93°	<b>TDJNR/L 2020 K11</b>	20	20	20	125	30	25	DN... 1104...	
	<b>2525 M11</b>	25	25	25	150	30	32	A276-A281	
	<b>TDJNR/L 2020 H1305</b>	20	20	20	100	33	25	DN... 1305...	
	<b>2020 K1305</b>	20	20	20	125	33	25	RHINO TURN	
	<b>2525 M1305</b>	25	25	25	150	36	32		
	<b>TDJNR/L 2020 K15</b>	20	20	20	125	39	25	DN... 1506...	
	<b>2525 M15</b>	25	25	25	150	39	32		
	<b>3232 P15</b>	32	32	32	170	39	40		
	<b>2020 K1504</b>	20	20	20	125	39	25	DN... 1504...	
	<b>2525 M1504</b>	25	25	25	150	39	32		


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim		Shim screw	Wrench	
<b>...11</b>	DLM 3	DLS 3	DSP 3	LSD 32	-	SO 40085I	L-W 2.5	T 15
<b>...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52	-	SO 50090I	L-W 3	T 20
<b>...15</b>	DLM 4	DLS 4	DSP 4	-	TSD 43	SO 40050I	L-W 3	T 15
<b>...1504</b>	DLM 4	DLS 4	DSP 4	-	TSD 44	SO 40050I	L-W 3	T 15

## T-holders with high pressure coolant

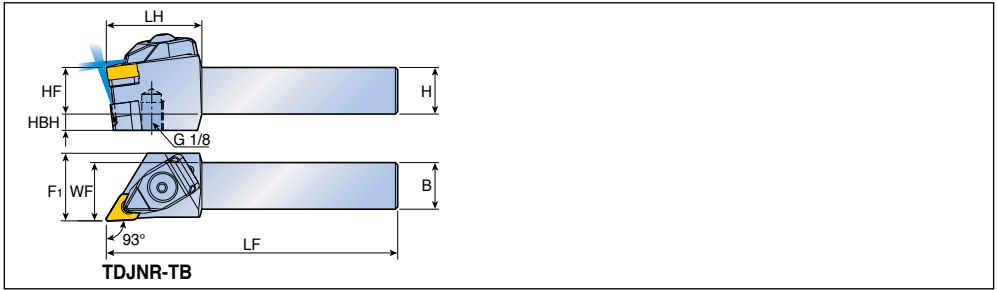

Approach angle	Designation	Dimension (mm)									Insert
		H	HF	B	LF	LH	WF	HBH	F1		
93°	TDJNR/L 2020 K1305-TB	20	20	20	125	41	25	7	29	DN... 1305...	
	2525 M1305-TB	25	25	25	150	41	32	7	32	RHINO TURN A276-A281	




## Spare parts


Designation	Clamp	Clamp screw	Spring	Upper O-ring	Lower O-ring	Shim	Shim screw	Wrench	
...2020-TB	DLM 3.5-NX-TB	BH M5x0.8x 21-MO-TB	DSP 4	O-RING ID5.28x 1.78	O-RING ID7.59x 2.62	LSD 3.52	SO 50090I-MO	L-W 3	T 20
...2525-TB	DLM 3.5-NX-TB	BH M5x0.8x 21-MO-TB	DSP 4	O-RING ID5.28x 1.78	O-RING ID7.59x 2.62	LSD 3.52	SO 50090I	L-W 3	T 20

• Please refer to A164 page for COOL-BURST accessories

## T-holders

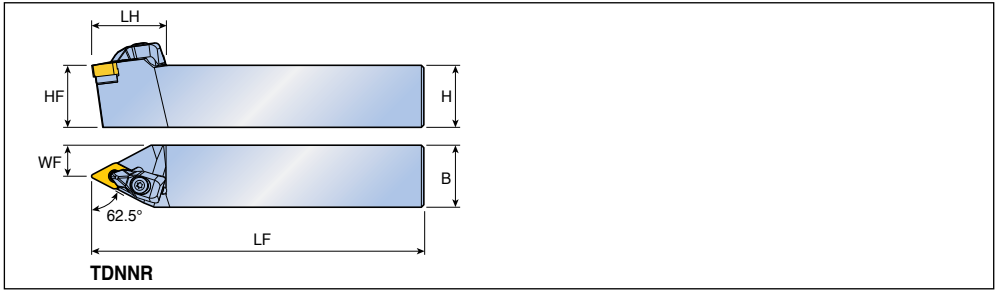

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
62.5°	TDNNR/L <b>2525 M11</b>	25	25	25	150	30	12.5	DN... 1104...
	TDNNR/L <b>2020 K1305</b>	20	20	20	125	34	10	DN... 1305...
	TDNNR/L <b>2525 M1305</b>	25	25	25	150	34	12.5	RHINO TURN







A276-A281

## Spare parts





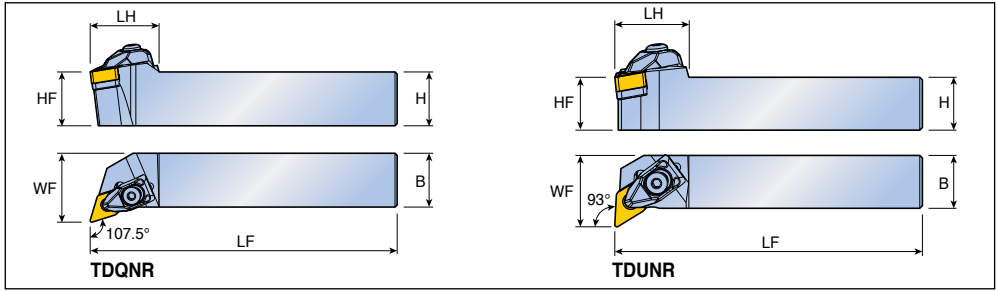

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...11	DLM 3	DLS 3	DSP 3	LSD 32	SO 400851	L-W 2.5	T 15
...1305	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52	SO 500901	L-W 3	T 20

## T-holders






Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>107.5°</b> 	<b>TDQNR/L 2020 K1305</b>	20	20	20	125	32	25	DN... 1305...  A276-A281
	<b>2525 M1305</b>	25	25	25	150	32	32	
<b>93°</b> 	<b>TDUNR/L 2020 K1305</b>	20	20	20	125	28	27	
	<b>2525 M1305</b>	25	25	25	150	28	32	

## Spare parts




Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1305	 DLM 3.5-NX	 DLS 4	 DSP 4	 LSD 3.52	 SO 50090I	 L-W 3	 T 20
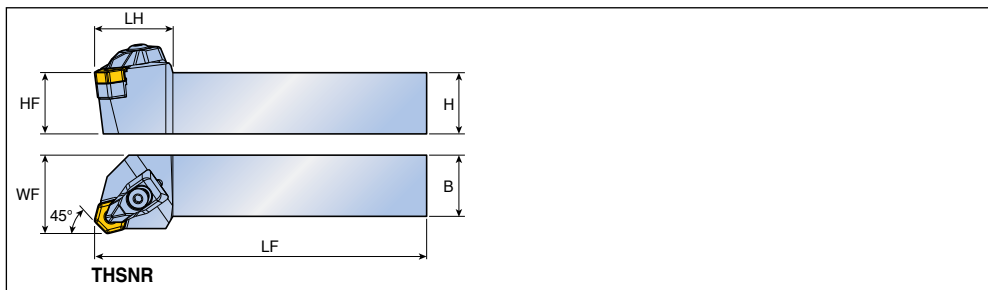
## T-holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>45°</b> 	<b>THSNR/L 2525 M05</b>	25	25	25	150	32	32	HN... 0504... HN... 1006...  A282
	<b>3232 P05</b>	32	32	32	170	32	40	
	<b>2525 M10</b>	25	25	25	150	42	32	
	<b>3232 P10</b>	32	32	32	170	42	40	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...05</b>							
<b>...10</b>	DLM 6	DLS 5	DSP 5	TSH 64	SO 50090I	L-W 4	T 20

## T-holders

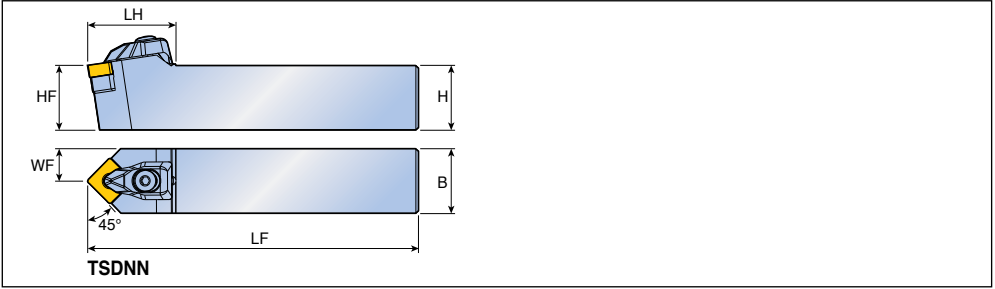





Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
45°	<b>TSDNN 2020 K0904</b>	20	20	20	125	28	10	SN... 0904...
	<b>2525 M0904</b>	25	25	25	150	28	12.5	A284-A290,
	<b>TSDNN 2525 M12</b>	25	25	25	150	34	12.5	SN... 1204... A346, A347,
	<b>3232 P19</b>	32	32	32	170	44	16	SN... 1906... A356

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw		Wrench	
<b>...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32A	SO 40085I	-	L-W 2.5	T 15
<b>...12</b>	DLM 4	DLS 4	DSP 4	TSS 44	SO 40050I	-	L-W 3	T 15
<b>...19</b>	DLM 6	DLS 5	DSP 5	LSS 63	-	SO 80180I	L-W 4	-

## T-holders

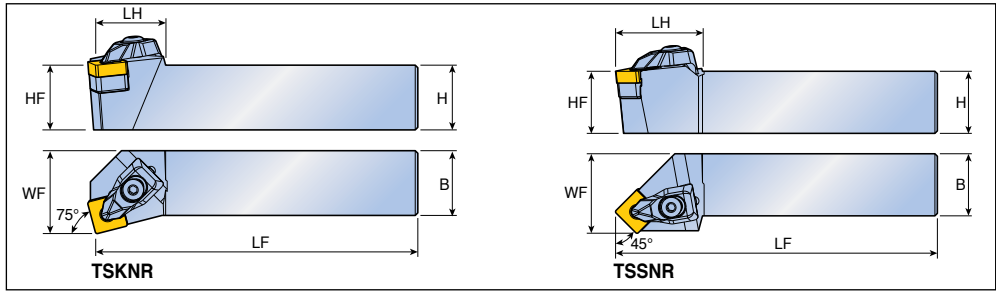









Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
75° 	<b>TSKNR/L 2525 M12</b>	25	25	25	150	27	32	SN... 1204...  A284-A290, A346, A347, A356
45° 	<b>TSSNR/L 2020 K0904</b>	20	20	20	125	23	25	SN... 0904...
	<b>2525 M0904</b>	25	25	25	150	23	32	<b>RHINO TURN</b>
	<b>TSSNR/L 2525 M12</b>	25	25	25	150	35	32	SN... 1204...

## Spare parts

Designation	Clamp 	Clamp screw 	Spring 	Shim 	Shim screw 	Wrench 	
<b>...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32A	SO 40085I	L-W 2.5	T 15
<b>...12</b>	DLM 4	DLS 4	DSP 4	TSS 44	SO 40050I	L-W 3	T 15
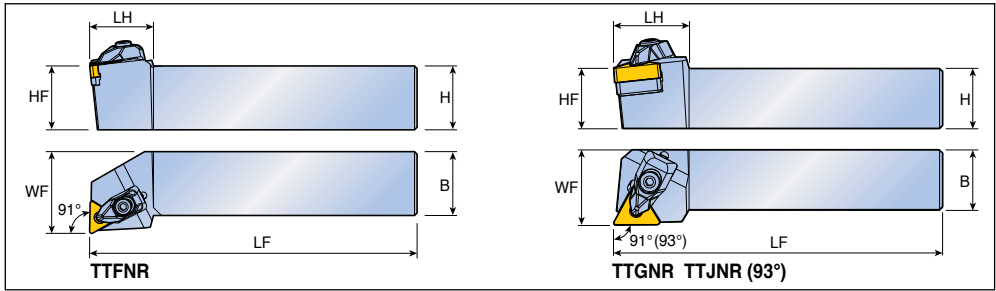
## T-holders




Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>91°</b> 	<b>TTFNR/L 2020 K1304</b>	20	20	20	125	25	25	TN... 1304... 
	<b>2525 M1304</b>	25	25	25	150	25	32	 A291-A296
<b>91°(93°)</b> 	<b>TTGNR/L 2020 H1304</b>	20	20	20	100	25	25	TN... 1304... 
	<b>2020 K1304</b>	20	20	20	125	25	25	
	<b>2525 M1304</b>	25	25	25	150	25	32	
	<b>TTJNR/L 2525 M1304</b>	25	25	25	150	25	32	
	<b>TTGNR/L 2525 M16</b>	25	25	25	150	25	32	TN... 1604... 
	<b>TTJNR/L 2020 K16</b>	20	20	20	125	25	25	
	<b>2525 M16</b>	25	25	25	150	25	32	 A291-A296, A349, A357

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1304	 DLM 2.5-NX	 DLS 3	 DSP 3	 LST 2.52	 SO 400851	 L-W 2.5	 T 15
...16	 DLM 3	 DLS 3	 DSP 3	 TST 33	 SO 350801	 L-W 2.5	 T 15

## T-holders

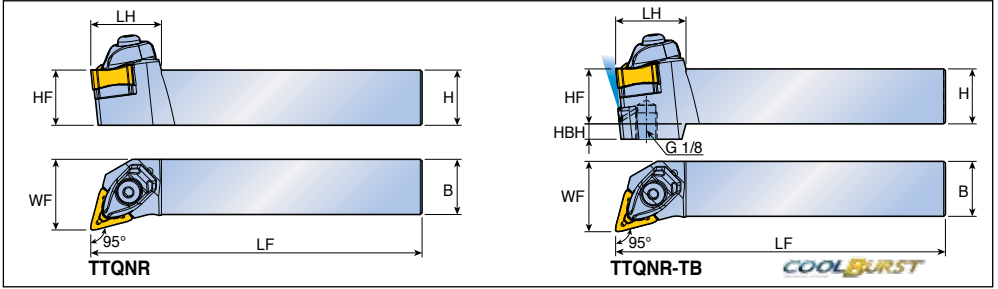

Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBH	
<b>95°</b> 	<b>TTQNR/L 2525 M2109</b>	25	25	25	150	32	32	-	TNMV 2109... 
	<b>3232 P2109</b>	32	32	32	170	32	40	-	
	<b>TTQNR/L 2525 M2109-TB</b>	25	25	25	150	32	32	7	
	<b>3232 P2109-TB</b>	32	32	32	170	32	40	-	


- BWT: Backward turning
- FWT: Forward turning

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...2109</b>	DLM 4.4T-NV	DLS 5	DSP 5	TSTV 210510	TS 35083I/HG	L-W 4	T 10
<b>...2109-TB</b>	DLM 4.4T-NV	DLS 5	DSP 5	TSTV 210510	TS 35083I/HG	L-W 4	T 10

• Please refer to A164 page for COOL-BURST accessories

## T-holders

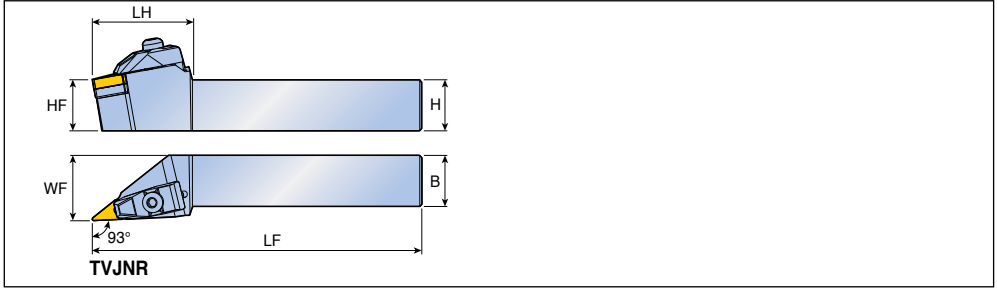


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
 44° max.	<b>TVJNR/L 2020 K13</b>	20	20	20	125	49	25	VN... 1304...  A297, A298
	<b>2525 M13</b>	25	25	25	150	49	32	
	<b>2020 K16</b>	20	20	20	125	49	25	VN... 1604...  A297, A298, A358
	<b>2525 M16</b>	25	25	25	150	49	32	
	<b>TVJNR/L 2020 K1304</b>	20	20	20	125	42	25	VN...X 1304...  A297, A299, YNMG 1304...  A305 <i>RHINO TURN</i>
	<b>2525 M1304</b>	25	25	25	150	42	32	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw		Wrench	
<b>...13</b>	DLM 3V	DLS 5	DSP 5	MSV 2.522	SC 4-SH	-	L-W 4	T 15
<b>...16</b>	DLM 3V	DLS 5	DSP 5	TSV 33	-	SO 35080I	L-W 4	T 15
<b>...1304</b>	DLM 2.5V-NX	DLS 4	DSP 4	MSVI 2.522	-	SO 40085I	L-W 3	T 15

## T-Holders with high pressure coolant

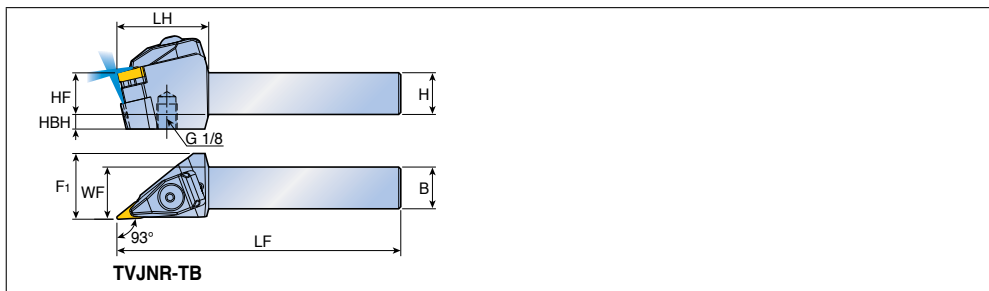

Approach angle	Designation	Dimension (mm)									Insert
		H	HF	B	LF	LH	WF	HBH	F1		
93°	<b>TVJNR/L 2020 K1304-TB</b>	20	20	20	125	44	25	7	31.5	VN...X 1304... YNMG 1304... A297, A299, A305	
	<b>2525 M1304-TB</b>	25	25	25	150	44	32	7	32.0		




## Spare parts

Designation	Clamp	Clamp screw	Spring	Upper O-ring	Lower O-ring	Shim	Shim screw	Wrench	
<b>TVJNR/L-TB</b>	DLM 2.5V-NX-TB	BH M5X-0.8X21-MO-TB	DSP 4	O-RING ID5.28x 1.78	O-RING ID7.59x 2.62	MSV1 2.522	SO 40085I	L-W 3	T 15

• Please refer to A164 page for COOL-BURST accessories

## T-holders

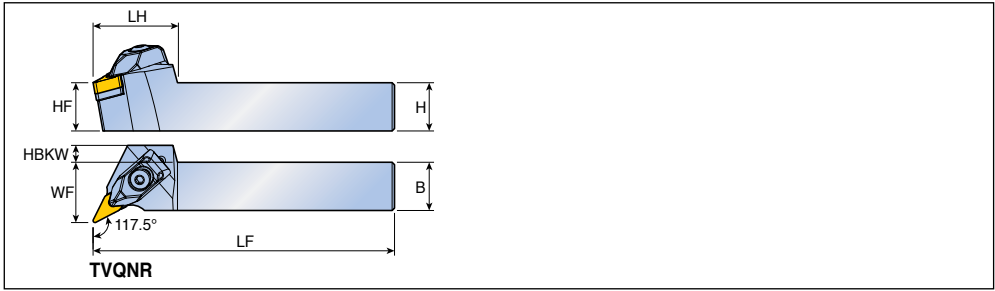


Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBKW	
<b>117.5°</b> 	<b>TVQNR/L 2020 K16</b>	20	20	20	125	42	25	8	VN... 1604...  A297, A298, A358
	<b>2525 M16</b>	25	25	25	150	42	32	2	
	<b>TVQNR/L 2020 K1304</b>	20	20	20	125	35	25	7	VN...X 1304...  A297, A299, A305 YNMG 1304... <i>RHINOTURN</i>
	<b>2525 M1304</b>	25	25	25	150	35	32	-	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...16</b>	DLM 3V	DLS 5	DSP 5	TSV 33	SO 35080I	L-W 4	T 15
<b>...1304</b>	DLM 2.5V-NX	DLS 4	DSP 4	MSVI 2.522	SO 40085I	L-W 3	T 15

## T-holders

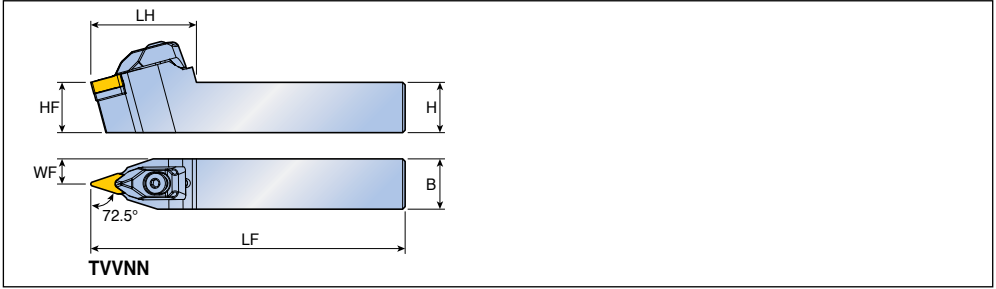


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>72.5°</b>	<b>TVVNN 2020 K1304</b>	20	20	20	125	42	10	VN...X 1304...
	<b>2525 M1304</b>	25	25	25	150	42	12.5	YNMG 1304... <i>RHINO TURN</i>
								A297, A299, A305



## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...1304</b>	DLM 2.5V-NX	DLS 4	DSP 4	MSVI 2.522	SO 40085I	L-W 3	T 15

## T-holders

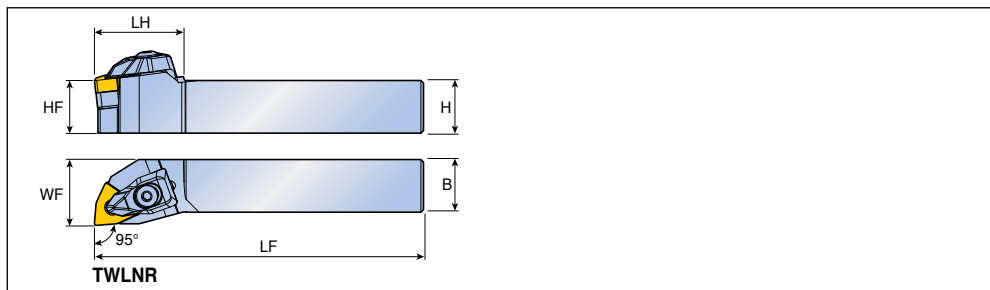


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>TWLNLR/L 2020 K0604</b>	20	20	20	125	26	25	WN...X 0604...
	<b>2525 M0604</b>	25	25	25	150	26	32	A300-A304, A350, A359
	<b>TWLNLR/L 2020 K06</b>	20	20	20	125	26	25	WN...G 0604...
	<b>2525 M06</b>	25	25	25	150	26	32	
	<b>2020 K08</b>	20	20	20	125	34.2	25	WN... 0804...
	<b>2525 M08</b>	25	25	25	150	34.2	32	
	<b>3232 P08</b>	32	32	32	170	34.2	40	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...0604</b>	DLM 3-NX	DLS 3	DSP 3	LSW 32A	SO 40085I	L-W 2.5	T 15
<b>...06</b>	DLM 3	DLS 3	DSP 3	PSW 32	SO 40090I	L-W 2.5	T 15
<b>...08</b>	DLM 4	DLS 4	DSP 4	TSW 44	SO 40050I	L-W 3	T 15

## T-holders with high pressure coolant

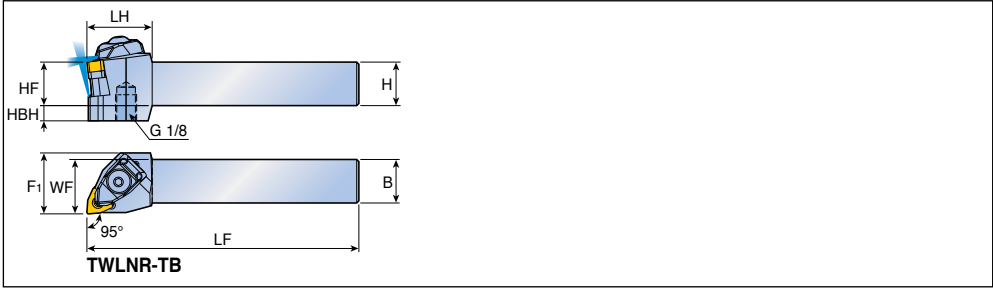


Approach angle	Designation	Dimension (mm)								Insert	
		H	HF	B	LF	LH	WF	HBH	F <sub>1</sub>		
<p><b>95°</b></p>	<b>2020 K0604-TB</b>	20	20	20	125	30	25	7	28	WN...X 0604...  A303, A304	
	<b>2525 M0604-TB</b>	25	25	25	150	30	32	7	32		

## Spare parts

Designation	Clamp	Clamp screw	Spring	Upper O-ring	Lower O-ring	Shim	Shim screw	Wrench	
<b>TWLNLR/L-TB</b>	DLM 3-NX-TB	BH M4x0.7x16-TB	DSP 3	O-RING ID4.47x1.78	O-RING ID6.07x1.78	LSW 32A	SO 400851	L-W 3	T 15

• Please refer to A164 page for COOL-BURST accessories

## T-holders

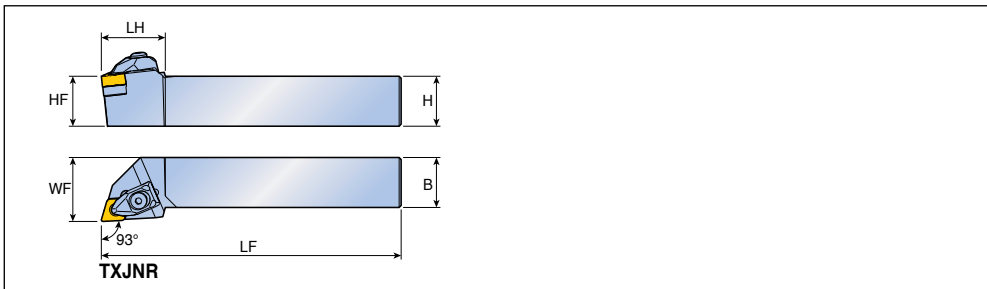


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>TXJNR/L 2020 K0904</b>	20	20	20	125	25	25	XNMG 0904... <i>RHINOXTURN</i>
	<b>2525 M0904</b>	25	25	25	150	25	32	 XN... 1105... A305, A306 <i>RHINOXTURN</i> <i>POSTTURN</i>
	<b>2020 K1105</b>	20	20	20	125	32	25	
	<b>2525 M1105</b>	25	25	25	150	32	32	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...0904	DLM 2.5-NX	DLS 3	DSP 3	TSX 2.73	SO 400851	L-W 2.5	T 15
...1105	DLM 3.5-NX	DLS 4	DSP 4	TSX 3.53	SO 500901	L-W 3	T 20



## T-holders

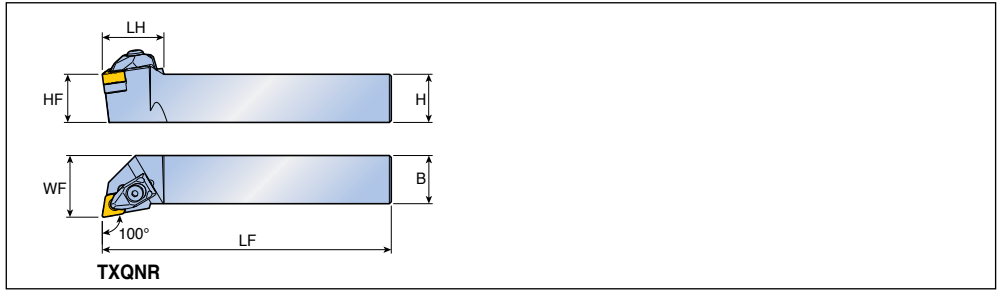


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>TXQNR/L 2020 K0904</b>	20	20	20	125	25	25	XNMG 0904...
	<b>2525 M0904</b>	25	25	25	150	25	32	<i>RHINOXTURN</i>
	<b>2020 K1105</b>	20	20	20	125	30	25	XNMG 1105...
	<b>2525 M1105</b>	25	25	25	150	32	32	<i>RHINOXTURN</i>

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...0904</b>	DLM 2.5-NX	DLS 3	DSP 3	TSX 2.73	SO 40085I	L-W 2.5	T 15
<b>...1105</b>	DLM 3.5-NX	DLS 4	DSP 4	TSX 3.53	SO 50090I	L-W 3	T 20

# TZQNR/L TZQNR-TB

## T-holders for ZNMV insert

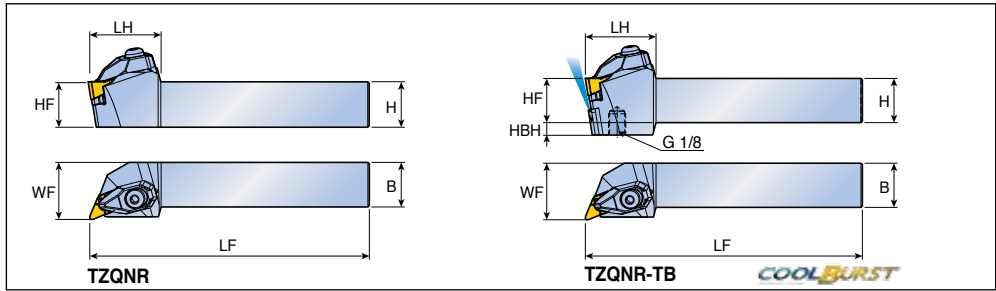

Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBH	
<b>ZNMV</b> 23°(BWT) 95°(FWT)	<b>TZQNR/L 2525 M1410</b>	25	25	25	150	40	32	-	ZNMV 1410... A307
	<b>3232 P1410</b>	32	32	32	170	40	40	-	
 <b>ZNMV</b>	<b>TZQNR/L 2525 M1410-TB</b>	25	25	25	150	40	32	7	
	<b>3232 P1410-TB</b>	32	32	32	170	40	40	-	
 <b>ZNMV Y-BF</b>	 <b>ZNMV</b>								
	 <b>ZNMV Y-BF</b>								


- BWT: Backward turning
- FWT: Forward turning

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...1410</b>	DLM 3.3Z-NV	DLS 5	DSP 5	TSZ 140310	TS 350831/HG	L-W 4	T 10
<b>...1410-TB</b>	DLM 3.3Z-NV	DLS 5	DSP 5	TSZ 140310	TS 350831/HG	L-W 4	T 10

- Please refer to A164 page for COOL-BURST accessories

## T-holders for ZNMV Y-BF insert

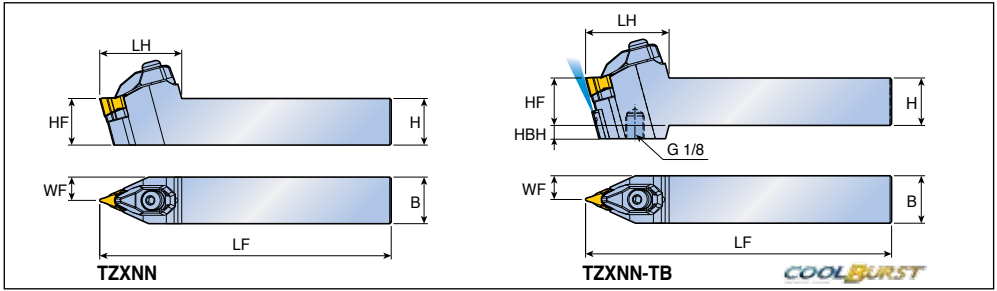


Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF	HBH	
<b>73°</b> 	<b>TZXNN 2525 M1410</b>	25	25	25	150	44	12.5	-	ZNMV 1410...Y-BF 
	<b>3232 P1410</b>	32	32	32	170	44	16	-	
	<b>TZXNN 2525 M1410-TB</b>	25	25	25	150	44	12.5	7	
	<b>3232 P1410-TB</b>	32	32	32	170	44	16	-	



## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...1410</b>	DLM 3.3Z-NV	DLS 5	DSP 5	TSZ 140310	TS 350831/HG	L-W 4	T 10
<b>...1410-TB</b>	DLM 3.3Z-NV	DLS 5	DSP 5	TSZ 140310	TS 350831/HG	L-W 4	T 10

• Please refer to A164 page for COOL-BURST accessories

## Wedge clamp type holders

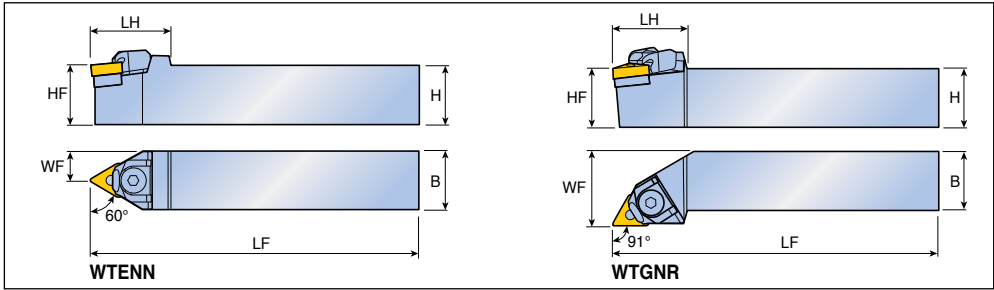


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>60°</b> 	<b>WTENN 2020 K1304</b>	20	20	20	125	28	10.0	TN... 1304...
	<b>2525 M1304</b>	25	25	25	150	28	12.5	<b>RHINOTURN</b> A291-A296,
	<b>WTENN 2020 K16</b>	20	20	20	125	35	10.0	TN... 1604... A349, A357
	<b>2525 M16</b>	25	25	25	150	35	12.5	
	<b>2525 M22</b>	25	25	25	150	38	12.5	TN... 2204...
	<b>3225 P22</b>	32	32	25	170	38	12.5	
	<b>3232 P22</b>	32	32	32	170	38	16.0	
<b>91°</b> 	<b>WTGNR/L 2020 K1304</b>	20	20	20	125	27	25	TN... 1304...
	<b>2525 M1304</b>	25	25	25	150	27	32	<b>RHINOTURN</b>
	<b>WTGNR/L 2020 K16</b>	20	20	20	125	32	25	TN... 1604...
	<b>2525 M16</b>	25	25	25	150	32	32	
	<b>2525 M22</b>	25	25	25	150	38	32	TN... 2204...
	<b>3232 P22</b>	32	32	32	170	38	40	

## Spare parts

Designation	Wedge clamp	Screw	Snap ring	Shim	Pin screw	Wrench	
<b>...1304</b>	WC 2.53	WCS 2.5	CSR 2	WST 2.52	WSS 2.52	L-W 2.5	
<b>...16</b>	WC 33	WCS 4	WSR 4	WST 33	WSS 33	L-W 3, L-W 2.5	
<b>...22</b>	WC 43	WCS 4	WSR 4	WST 43	WSS 43	L-W 3	

## Wedge clamp type holders

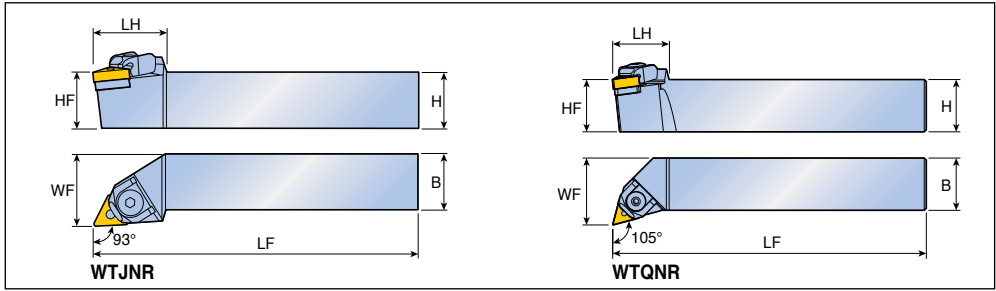


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>93°</b> 	<b>WTJNR/L 2020 K1304</b>	20	20	20	125	27	25	TN... 1304...
	<b>2525 M1304</b>	25	25	25	150	27	32	A291-A296,
	<b>WTJNR/L 2020 K16</b>	20	20	20	125	32	25	TN... 1604... A349, A357
	<b>2525 M16</b>	25	25	25	150	32	32	
	<b>3225 P16</b>	32	32	25	170	32	32	
	<b>3232 P16</b>	32	32	32	170	38	40	
	<b>2525 M22</b>	25	25	25	150	38	32	TN... 2204...
	<b>3232 P22</b>	32	32	32	170	38	40	
<b>105°</b> 	<b>WTQNR/L 2020 K1304</b>	20	20	20	125	27	25	TN... 1304...
	<b>2525 M1304</b>	25	25	25	150	27	32	

## Spare parts

Designation	Wedge clamp	Screw	Snap ring	Shim	Pin screw	Wrench	
<b>...1304</b>	WC 2.53	WCS 2.5	CSR 2	WST 2.52	WSS 2.52	L-W 2.5	
<b>...16</b>	WC 33	WCS 4	WSR 4	WST 33	WSS 33	L-W 3, L-W 2.5	
<b>...22</b>	WC 43	WCS 4	WSR 4	WST 43	WSS 43	L-W 3	

## Top clamp type holders for V bottom insert

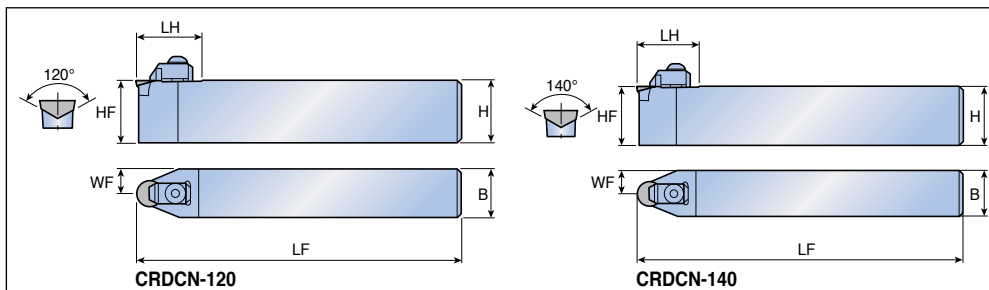

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>45°</b> 	<b>CRDCN 2525 M06-120</b>	25	25	25	150	28	12.5	RCGX 0606... A351
	<b>3225 P06-120</b>	32	32	25	170	28	12.5	
	<b>3225 P09-120</b>	32	32	25	170	30	12.5	RCGX 0907...
	<b>3225 P12-120</b>	32	32	25	170	32	12.5	RCGX 1207...
<b>45°</b> 	<b>CRDCN 2525 M06-140</b>	25	25	25	150	28	12.5	RCGX 0603...FT A362
	<b>3225 P06-140</b>	32	32	25	170	28	12.5	
	<b>3225 P09-140</b>	32	32	25	170	30	12.5	RCGX 0903...FT
	<b>3225 P12-140</b>	32	32	25	170	32	12.5	RCGX 1204...FT


## Spare parts







Designation	Clamp	Clamp screw	Shim	Shim screw		Wrench	
<b>...06-120</b>	BCL 6-20A	BH M6x1x25	CERS 06	SO 22050I	-	L-W 4	T 7
<b>...09-120</b>	BCL 6-20A	BH M6x1x25	CERS 09	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-
<b>...12-120</b>	BCL 6	BH M6x1x25	CERS 12	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-
<b>...06-140</b>	BCL 6-20A	BH M6x1x25	CBRS 06	SO 22050I	-	L-W 4	T 7
<b>...09-140</b>	BCL 6-20A	BH M6x1x25	CBRS 09	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-
<b>...12-140</b>	BCL 6	BH M6x1x25	CBRS 12	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-

# CRDCN-T CRDCR/L-T

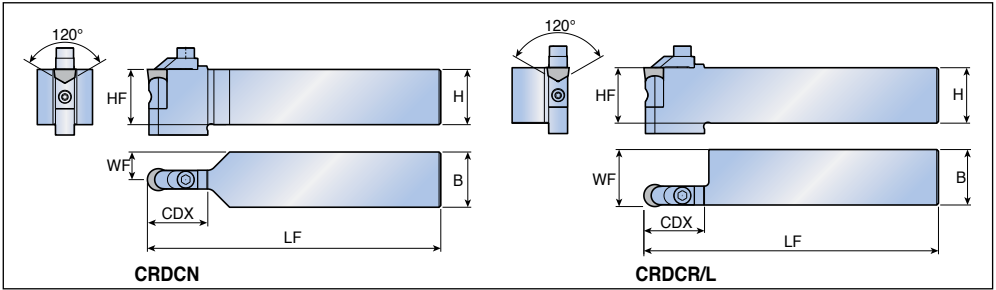







Narrow top clamp type holders for V bottom insert




Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	CDX	WF		
	<b>CRDCN 3232 P0907-120-T30</b>	32	32	32	170	30	16	RCGX 0907... 	
	<b>3232 P1207-120-T35</b>	32	32	32	170	35	16	RCGX 1207...  A351	
	<b>CRDCR/L 3232 P0907-120-T30</b>	32	32	32	170	30	32.8	RCGX 0907... 	
	<b>CRDCR 3225 P0907-120-T30</b>	32	32	25	170	30	32.8	 A362	
	<b>CRDCL 3232 P1207-120-T35</b>	32	32	32	170	35	32.9	RCGX 1207...	

## Spare parts

Designation	Clamp	Clamp screw	Shim	Shim screw	Wrench	
						
...0907...	HCL 09-M	SH M5X0.8X12	CERS 09-T	SO 35124I	L-W 4	T 15
...1207...	HCL 12-M	SH M6X1X16	CERS 12-T	TS 40140AJ/HG	L-W 5	T 20

## Top clamp type holders for V bottom insert

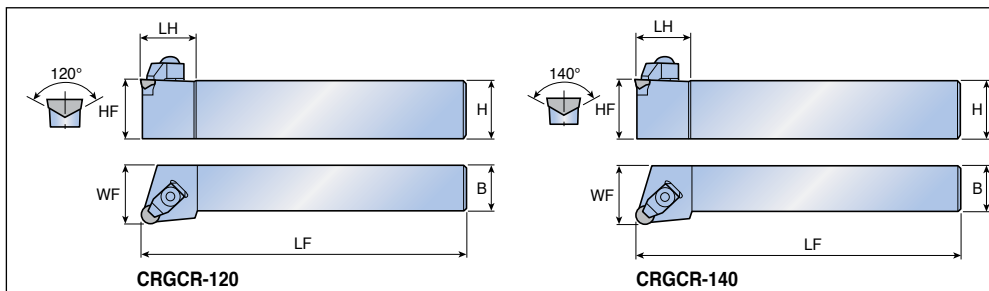


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
	<b>CRGCR/L 2525 M06-120</b>	25	25	25	150	28	32	RCGX 0606...
	<b>3225 P06-120</b>	32	32	25	170	28	32	RCGX 0907...
	<b>3225 P09-120</b>	32	32	25	170	30	32	RCGX 1207...
	<b>3225 P12-120</b>	32	32	25	170	32	32	
	<b>CRGCR/L 3225 P06-140</b>	32	32	25	170	28	32	RCGX 0603...FT
	<b>3225 P09-140</b>	32	32	25	170	30	32	RCGX 0903...FT
	<b>3225 P12-140</b>	32	32	25	170	32	32	RCGX 1204...FT

## Spare parts

Designation	Clamp	Clamp screw	Shim	Shim screw		Wrench	
<b>...06...</b>	BCL 6-20A	BH M6x1x25	CERS 06	SO 22050I	-	L-W 4	T 7
<b>...09...</b>	BCL 6-20A	BH M6x1x25	CERS 09	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-
<b>...12...</b>	BCL 6	BH M6x1x25	CERS 12	-	BH M2.5x0.45x10	L-W 4, L-W 1.5	-

# CCLNR/L-F

## Combi Clamp Top holders for flat inserts

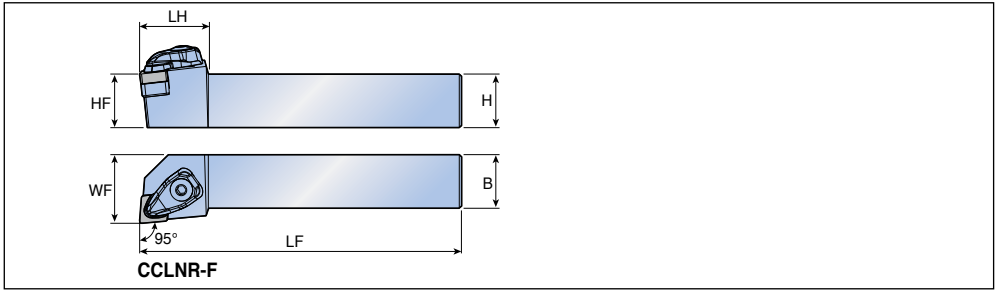

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
 <b>95°</b>	<b>CCLNR/L 2525 M1204-F</b>	25	25	25	150	32	32	CNGN 1204...  A341, A342, A353


### Spare parts


Designation	Clamp set	Shim	Shim screw	Wrench			
<b>CCLNR/L...-F</b>	CCL S-4F	TSC 44	SO 40050I	L-W 4	T 15		

# TCBNR/L-CH TCKNR/L-CH





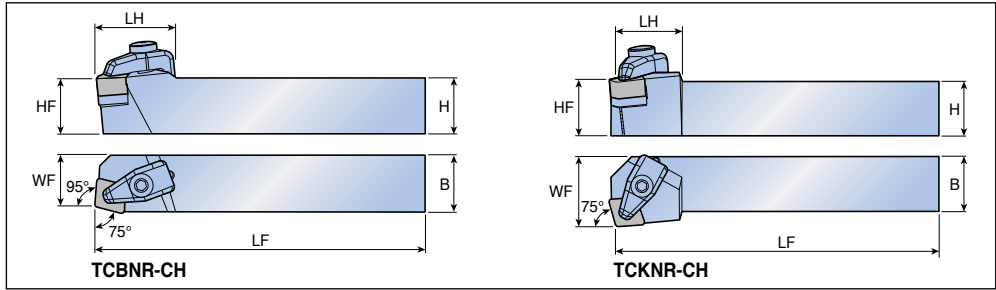


T-holders for CH dimple insert




Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF		
75°	<b>TCBNR/L 2525 M12-CH</b>	25	25	25	150	34.7	23	CNGX 1207...CH  A342	
	<b>3225 P12-CH</b>	32	32	25	170	34	24		
75°	<b>TCKNR/L 2525 M12-CH</b>	25	25	25	150	28	32		

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
							
<b>...12-CH</b>	CCL-4	CSC 4	DSP 5	TSC 43	SO 400501	L-W 4	T 15

## T-holders for CH dimple insert

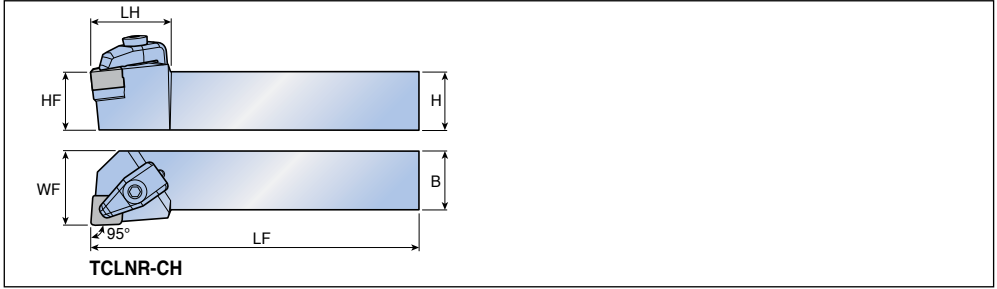

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
95°	<b>TCLNR/L 2525 M12-CH</b>	25	25	25	150	33	32	CNGX 1207...CH  A342
	<b>3225 P12-CH</b>	32	32	25	170	33	32	


## Spare parts



Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...12-CH	CCL-4	CSC 4	DSP 5	TSC 43	SO 400501	L-W 4	T 15

# TDJNR/L-CH TDNNN-CH



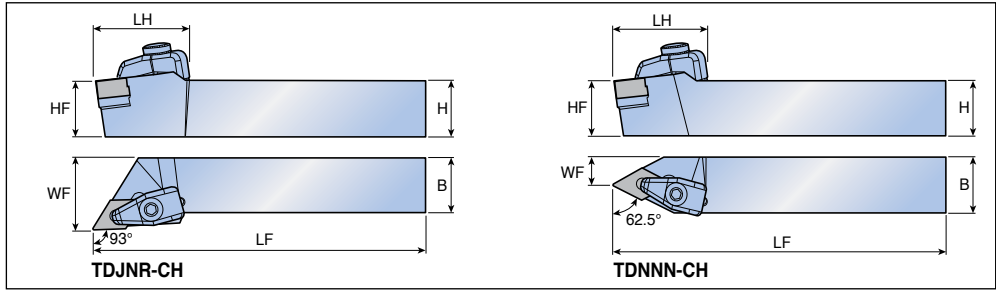






## T-holders for CH dimple insert




Approach angle	Designation	Dimension (mm)							Insert
		H	HF	B	LF	LH	WF		
93°	<b>TDJNR/L 2525 M15-CH</b>	25	25	25	150	38	32	DNGX 1507...CH 	
	<b>3225 P15-CH</b>	32	32	25	170	38	32		
62.5°	<b>TDNNN 2525 M15-CH</b>	25	25	25	150	40	12.5	A343 	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
							
<b>...15-CH</b>	CCL-4	CSC 4	DSP 5	TSD 43	SO 400501	L-W 4	T 15

## T-holders for CH dimple insert

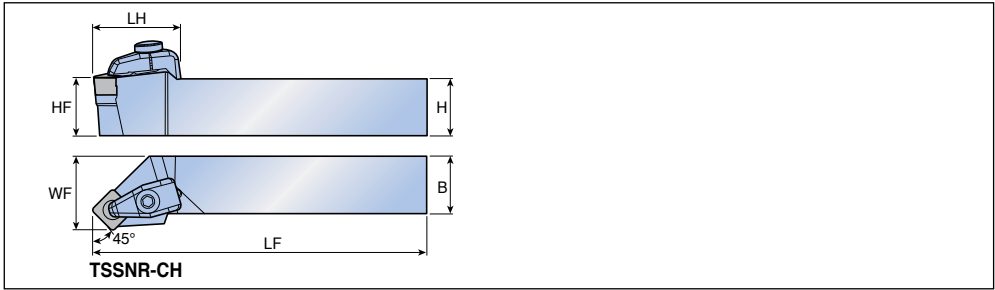

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
45° 	<b>TSSNR/L 2525 M12-CH</b>	25	25	25	150	35	32	SNGX 1207...CH SNGX 1507...CH 
	<b>3232 P12-CH</b>	32	32	32	170	35	40	
	<b>3225 P15-CH</b>	32	32	25	170	35	32	

## Spare parts


Designation	Clamp	Clamp screw	Spring	Shim	Shim screw		Wrench	
<b>...12-CH</b>	CCL-4	CSC 4	DSP 5	TSS 43	SO 400501	-	L-W 4	T 15
<b>...15-CH</b>	CCL-4	CSC 4	DSP 5	S 50	-	BH M5x0.8x10	L-W 4, L-W 3	-







# TSDNN-DA TSKNR-DA



Combi clamp T-holders for DA dimple inserts

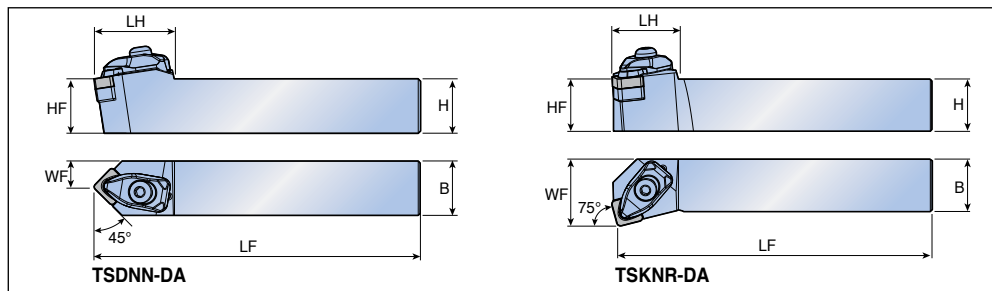


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>45°</b> 	<b>TSDNN</b> <b>2525 M1204-DA</b>	25	25	25	150	37	12.5	SNGX 1204...DA  A356
<b>75°</b> 	<b>TSKNR/L</b> <b>2525 M1204-DA</b>	25	25	25	150	29	32	SNGX 1204...DA  A356

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1204-DA	 DCL S-4DA	 DLS 5	 DSP 5	 TSS 44	 SO 40050I	 L-W 4	 T 15

## Combi clamp T-holders for flat inserts

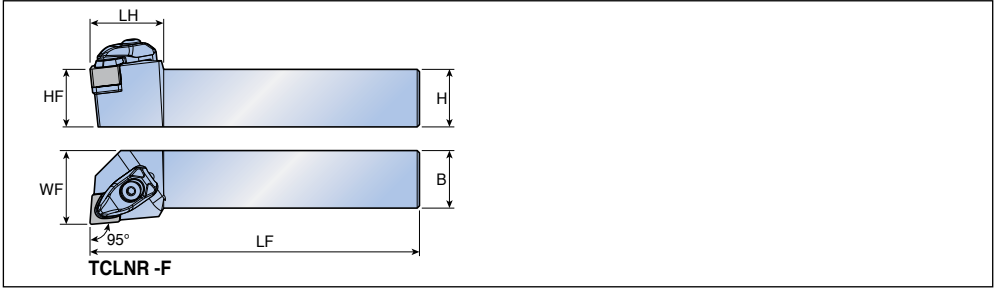


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>95°</b> 	<b>TCLNR/L 2525 M0903-F</b>	25	25	25	150	25	32	CN...N 0903...
	<b>2020 K1204-F</b>	20	20	20	125	32	25	CN...N 1204...
	<b>2525 M1204-F</b>	25	25	25	150	32	32	A341, A342, A353
	<b>2020 K1207-F</b>	20	20	20	125	32	25	CN...N 1207...
	<b>2525 M1207-F</b>	25	25	25	150	32	32	
	<b>3232 P1207-F</b>	32	32	32	170	32	40	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench		
<b>...0903-F</b>	DCL S-3F	DLS 3	DSP 3	LSC 32	SO 40085I	L-W 2.5	T 15	
<b>...1204-F</b>	DCL S-4F	DLS 4	DSP 4	TSC 44	SO 40050I	L-W 3	T 15	
<b>...1207-F</b>	DCL S-4F	DLS 4	DSP 4	TSC 42	SO 40050I	L-W 3	T 15	

## Combi clamp T-holders for flat inserts

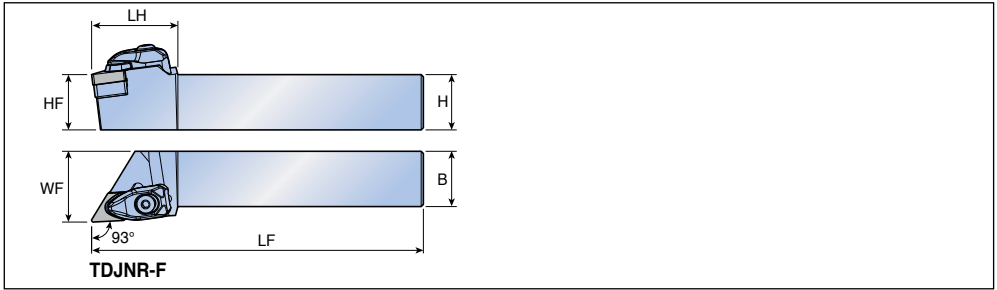


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
93°	<b>TDJNR/L 2525 M1504-F</b>	25	25	25	150	39	32	DN...N 1504...
	<b>2525 M1507-F</b>	25	25	25	150	39	32	DN...N 1507...
	<b>3232 P1507-F</b>	32	32	32	170	39	40	



## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1504-F	DCL S-4F	DLS 4	DSP 4	TSD 44	SO 40050I	L-W 3	T 15
...1507-F	DCL S-4F	DLS 4	DSP 4	TSD 42	SO 40050I	L-W 3	T 15

## Combi clamp T-holders for flat inserts

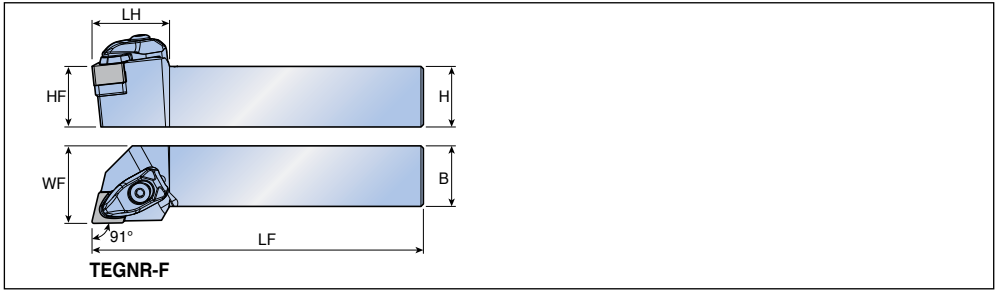

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>91°</b>	<b>TEGNER/L 2525 M1307-F</b>	25	25	25	150	32	32	EN...N 1307... <b>A344</b>


### Spare parts





Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench		
<b>...1307-F</b>	DCL S-4F	DLS 4	DSP 4	E 43	BH M5x0.8x10	L-W 3		

# TRDNN-F TRGNR/L-F



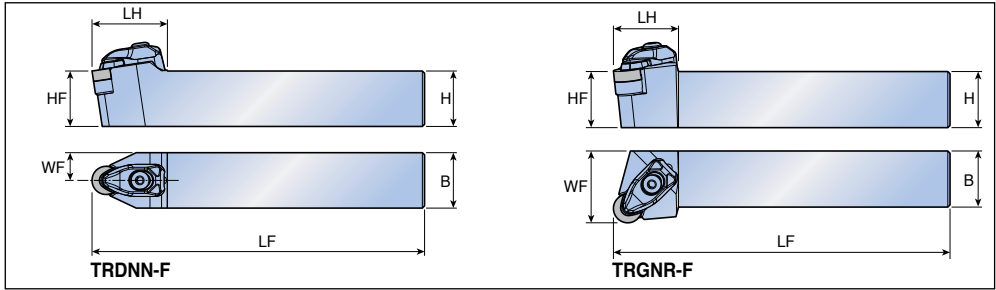




















## Combi clamp T-holders for flat inserts



Approach angle	Designation	Dimension (mm)						Insert	
		H	HF	B	LF	LH	WF		
<b>45°</b> 	<b>TRDNN</b>	<b>2525 M0903-F</b>	25	25	25	150	27	12.5	RN...N 0903... 
		<b>2020 K1204-F</b>	20	20	20	125	34	10	RN...N 1204...  A345, A355
		<b>2525 M1204-F</b>	25	25	25	150	34	12.5	
		<b>2020 K1207-F</b>	20	20	20	125	34	10	RN...N 1207...
		<b>2525 M1207-F</b>	25	25	25	150	34	12.5	
		<b>3225 P1207-F</b>	32	32	25	170	34	12.5	
		<b>3232 P1207-F</b>	32	32	32	170	34	16	
<b>90°</b> 	<b>TRGNR/L</b>	<b>2525 M0903-F</b>	25	25	25	150	29	32	RN...N 0903...
		<b>2020 K1204-F</b>	20	20	20	125	29	25	RN...N 1204...
		<b>2525 M1204-F</b>	25	25	25	150	29	32	
		<b>2020 K1207-F</b>	20	20	20	125	29	25	RN...N 1207...
		<b>2525 M1207-F</b>	25	25	25	150	29	32	
		<b>3225 P1207-F</b>	32	32	25	170	29	32	
		<b>3232 P1207-F</b>	32	32	32	170	29	40	

• RN...N 1204/1207 are exchangeable, RN...N 1203 is not exchangeable on same holder


## Spare parts



Designation	Clamp	Clamp screw	Spring	Shim		Shim screw	Wrench	
...0903-F	 DCL S-3F	 DLS 3	 DSP 3	 LSR 32	-	 SO 40085I	 L-W 2.5	 T 15
...1204-F	 DCL S-4F	 DLS 4	 DSP 4	-	 TSR 45	 SO 40050I	 L-W 3	 T 15
...1207-F	 DCL S-4F	 DLS 4	 DSP 4	-	 TSR 43	 SO 40050I	 L-W 3	 T 15

# TSDNN-F TSKNR/L-F




## Combi clamp T-holders for flat inserts

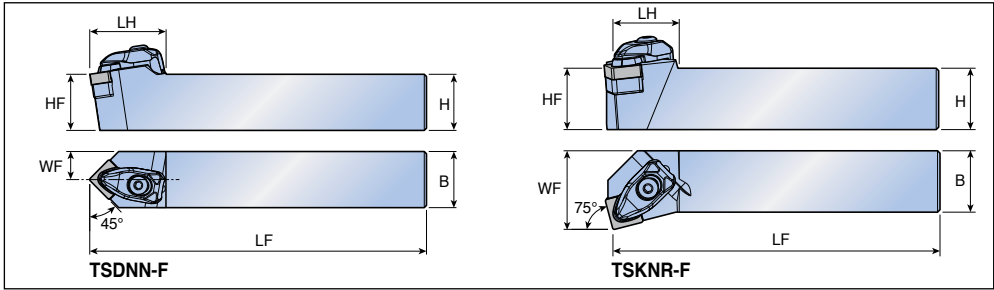

Approach angle	Designation	Dimension (mm)						Insert	
		H	HF	B	LF	LH	WF		
<b>45°</b> 	<b>TSDNN</b>	<b>2020 K1204-F</b>	20	20	20	125	34	10	SN...N 1204... SN...N 1207... A346, A356
	<b>2525 M1204-F</b>	25	25	25	150	34	12.5		
	<b>2525 M1207-F</b>	25	25	25	150	34	12.5		
	<b>3225 P1207-F</b>	32	32	25	170	34	12.5		
	<b>3232 P1207-F</b>	32	32	32	170	34	16		
<b>75°</b> 	<b>TSKNR/L</b>	<b>2525 M1204-F</b>	25	25	25	150	27	32	SN...N 1204...
	<b>3232 P1204-F</b>	32	32	32	170	27	40		
	<b>2525 M1207-F</b>	25	25	25	150	27	32		SN...N 1207...
	<b>3232 P1207-F</b>	32	32	32	170	27	40		


## Spare parts



Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1204-F	 DCL S-4F	 DLS 4	 DSP 4	 TSS 44	 SO 40050I	 L-W 3	 T 15
...1207-F	DCL S-4F	DLS 4	DSP 4	TSS 42	SO 40050I	L-W 3	T 15

# TSRNR/L-F TSSNR/L-F



Combi clamp T-holders for flat inserts

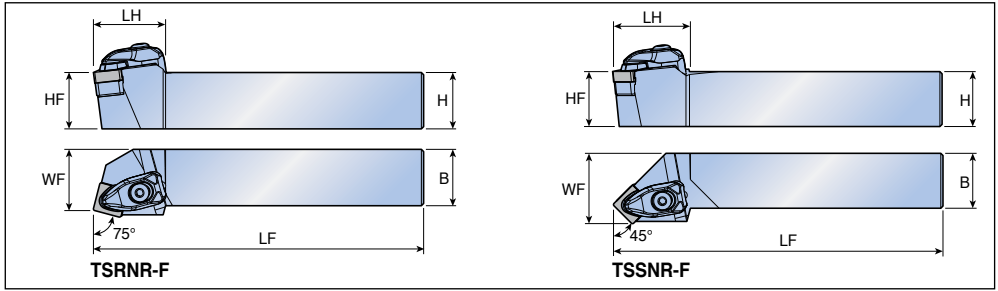


Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
<b>75°</b> 	<b>TSRNR/L 2525 M1204-F</b>	25	25	25	150	32	27	SN...N 1204... SN...N 1207... A346, A356
	<b>3232 P1204-F</b>	32	32	32	170	32	35	
	<b>2525 M1207-F</b>	25	25	25	150	32	27	
	<b>3225 P1207-F</b>	32	32	25	170	32	27	
	<b>3232 P1207-F</b>	32	32	32	170	32	35	
<b>45°</b> 	<b>TSSNR/L 2525 M1204-F</b>	25	25	25	150	35	32	SN...N 1204... SN...N 1207...
	<b>3232 P1204-F</b>	32	32	32	170	35	40	
	<b>2525 M1207-F</b>	25	25	25	150	35	32	
	<b>3232 P1207-F</b>	32	32	32	170	35	40	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1204-F	DCL S-4F	DLS 4	DSP 4	TSS 44	SO 400501	L-W 3	T 15
...1207-F	DCL S-4F	DLS 4	DSP 4	TSS 42	SO 400501	L-W 3	T 15

## Combi clamp T-holders for flat inserts

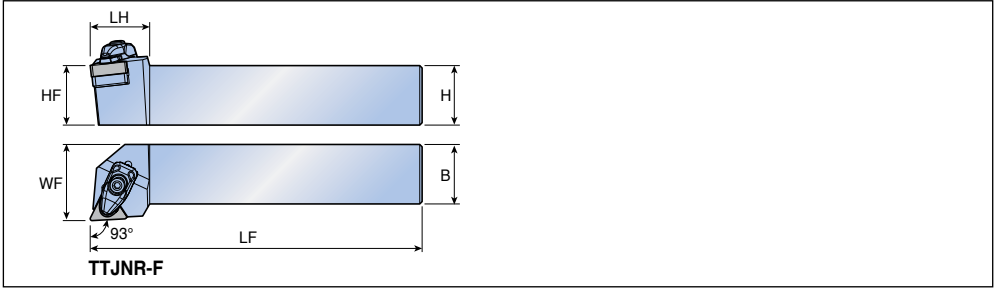

Approach angle	Designation	Dimension (mm)						Insert
		H	HF	B	LF	LH	WF	
93°	<b>TTJNR/L 2020 K1604-F</b>	20	20	20	125	25	25	TN...N 1604...
	<b>2525 M1604-F</b>	25	25	25	150	25	32	
	<b>2020 K1607-F</b>	20	20	20	125	25	25	TN...N 1607...
	<b>2525 M1607-F</b>	25	25	25	150	25	32	

• TNGN 1604/1607 Inserts are not exchangeable on same holder


### Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>...16-F</b>	DCL S-3F	DLS 3	DSP 3	TST 33	SO 400501	L-W 3	T 15

# 2PLLNR/L 2PLBNR/L



Lever lock type holders with two pins

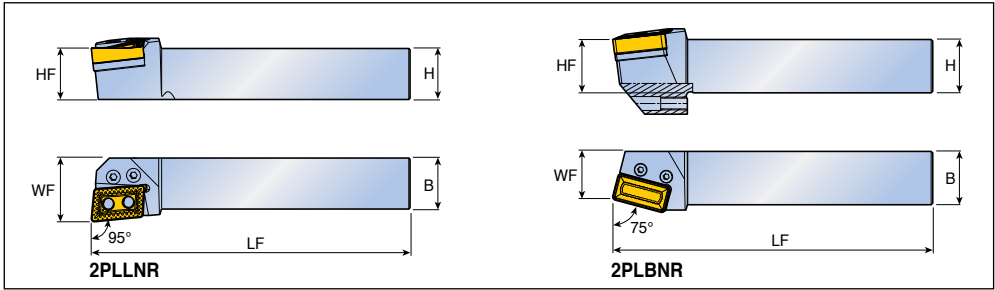


Approach angle	Designation	Dimension (mm)					Insert
		H	HF	B	LF	WF	
95°	<b>2PLLNR/L 4040 S4012</b>	40	40	40	250	50	LNMM 4012...HX  A337
	<b>5050 T4012</b>	50	50	50	300	60	
75°	<b>2PLBNR/L 5050 T5014</b>	50	50	50	300	45	LNMX 5014...

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Set screw	Wrench		
<b>2PLLNR/L...</b>	LCL 8	LCS 8-L39	LN 4025-T6.35-R/L	LSP 8	-	L-W 5		
<b>2PLBNR/L...</b>	LCL 8	LCS 8-L43	LN 5025-T6.35	LSP 8	SS M12x1.75x25	L-W 5		


## TOP-RAIL holders

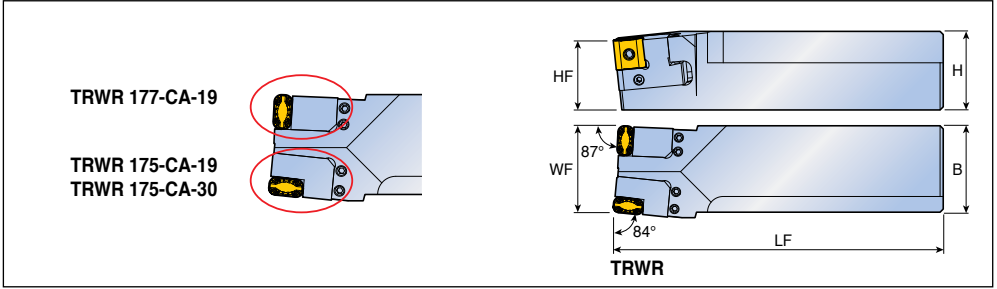

Approach angle	Designation	Dimension (mm)					Cartridge
		H	HF	B	LF	WF	
	<b>* TRWR/L 50-55 TG</b>	50	44	55	210	55	Left
							TRWR/L 175-CA-19
							TRWR/L 175-CA-30
							Right
							TRWR/L 177-CA-19

• \*Marked: Cartridges are not included in TOP-RAIL holder, please order separately.

## TOP-RAIL cartridges

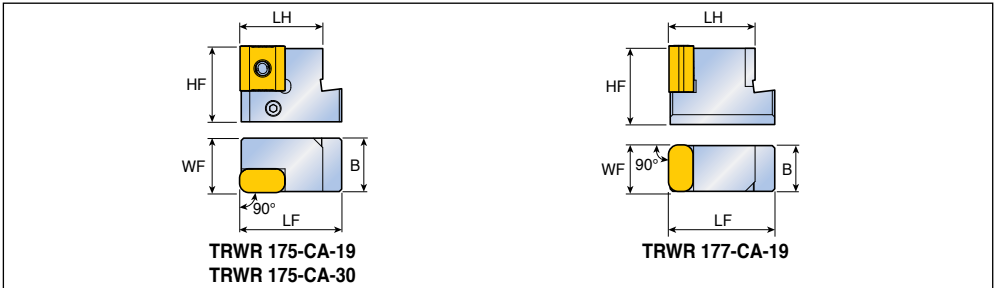


Designation	Dimension (mm)					Insert
	HF	B	LF	LH	WF	
<b>TRWR/L 175-CA-19</b>	32	22.6	43	35	23	LNMX 1919...
<b>175-CA-30</b>	32	22.6	43	35	23	LNMX 3019...
<b>177-CA-19</b>	32	18.6	43	35	19	LNMX 1919...

## Spare parts

Designation	Screw	Pin	Lever	Screw	Wrench			
<b>...50-55 TG</b>								
<b>...50-55 TG</b>	SS M6x1x16	PIN D5x13	-	-	L-W 3			
<b>...CA...</b>	-	-	LCL 5	LCS 5	L-W 3			


## Hose

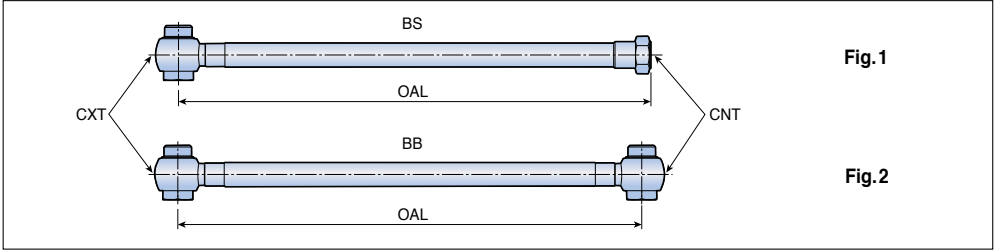

Designation	Dimension				Fig.
	OAL (mm)	CXT	CNT	Max.pressure (Bar)	
<b>TB HOSE G1/8-7/16-200BS</b>	200	G1/8"-28 BSPP	7/16"-20 UNF (Flare 37°)	260	1
<b>G1/8-7/16-250BS</b>	250	G1/8"-28 BSPP	7/16"-20 UNF (Flare 37°)	260	1
<b>G1/8-G1/8-200BB</b>	200	G1/8"-28 BSPP	G1/8"-28 BSPP	260	2
<b>G1/8-G1/8-250BB</b>	250	G1/8"-28 BSPP	G1/8"-28 BSPP	260	2
<b>5/16-7/16-200BS</b>	200	5/16"-24 UNF	7/16"-20 UNF (Flare 37°)	200	1
<b>5/16-G1/8-200BS</b>	200	5/16"-24 UNF	G1/8"-28 BSPP	200	1

• Hose is ordered separately


## Adapter

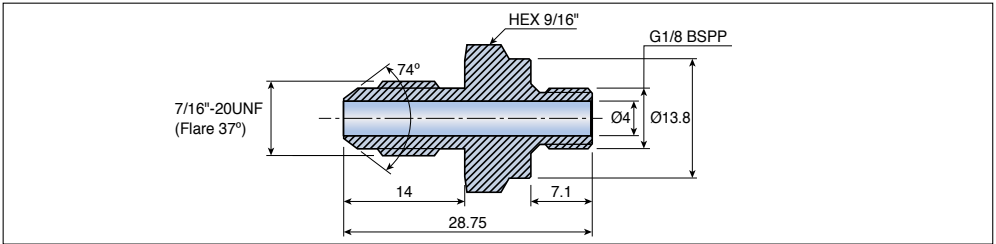

Designation
<b>TB NIPPLE G1/8-7/16 UNF</b>

• Adapter is ordered separately


## Seal washer

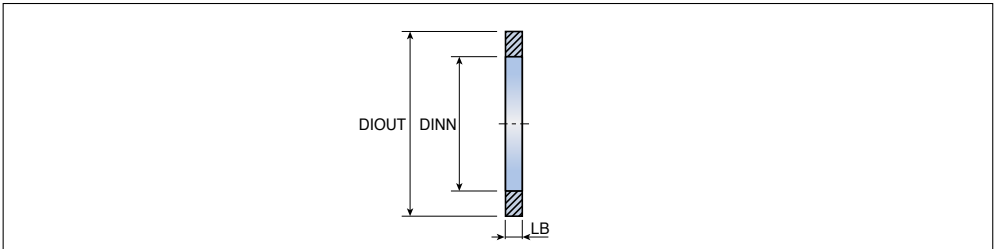

Designation	Dimension (mm)		
	DIOUT	DINN	LB
<b>TB COPPER SEAL 1/8"</b>	15	10	1
<b>SEAL 5/16"</b>	12	8	1

• Seal washer is ordered separately


## Connector

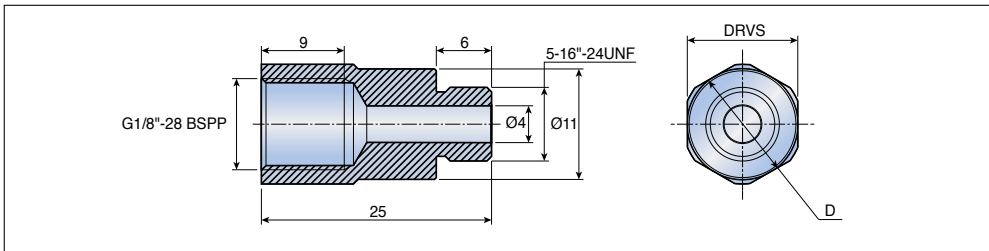

Designation	Dimension (mm)			
	D	DRVS		
<b>TB CONECTOR</b> 5/16"-G1/8"	13	12		
5/16"-G1/8"-12	12	11		

- Connector is ordered separately

## Coupling system

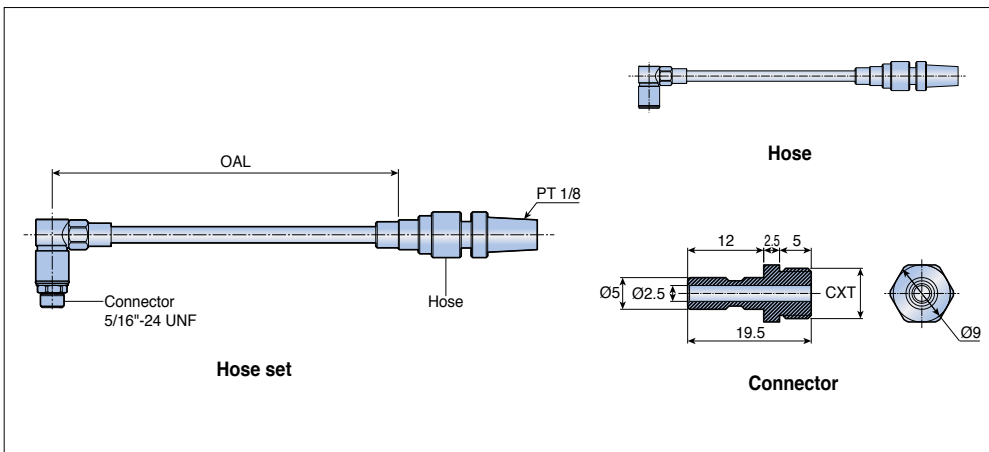


Components	Designation	Dimension			
		OAL (mm)	CXT	Maximum pressure (Bar)	
<b>Hose set</b>	<b>S-TB HOSE</b>	<b>R1/8-COUPLE-100</b>	100	-	140
		<b>R1/8-COUPLE-200</b>	200	-	140
		<b>R1/8-COUPLE-300</b>	300	-	140
<b>Hose</b>	<b>TB HOSE</b>	<b>R1/8-COUPLE-200</b>	200	-	140
		<b>R1/8-COUPLE-300</b>	300	-	140
<b>Connector</b>	<b>TB CONECTOR</b>	<b>5/16-COUPLE</b>	-	5/16"-24 UNF	-
		<b>G1/8-COUPLE</b>	-	G1/8"-28 BSPP	-
		<b>R1/8-COUPLE</b>	-	PT 1/8"	-

- Hose set, hose and connector are ordered separately

# QE1 SDJCR QE1 SDJCR-TB



Screw type modular heads for external turning

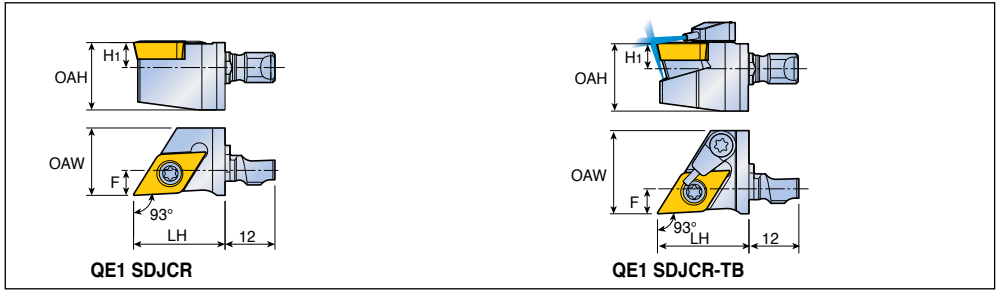


Approach angle	Designation	Dimension (mm)					Shank	Insert
		OAH	LH	OAW	H1	F		
93°	<b>QE1 SDJCR 11</b>	16.2	22.0	16.2	6.0	7.0	QE1 S12N-TB QE1 S16R-TB	DC... 11T3... A314-A317, A361
93°	<b>QE1 SDJCR 11-TB</b>	16.2	22.0	20.0	6.0	7.0		



## Spare parts

Designation	Screw	Cooling unit	Wrench			
...11	SO 350801	-	T 15			
...11-TB	SO 350801	S-CU-TB	T 15			

# QE1 SDJNR QE1 SDJNR-TB

Screw type modular heads for external turning

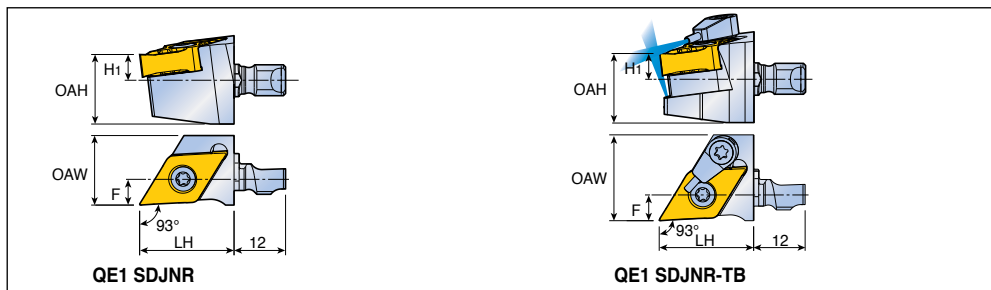

Approach angle	Designation	Dimension (mm)					Shank	Insert
		OAH	LH	OAW	H1	F		
<b>93°</b> 	<b>QE1 SDJNR 0803</b>	16.2	22.0	16.2	6.0	7.0	QE1 S12N-TB QE1 S16R-TB	DN...X 0803... RHINO TURN A281
	<b>QE1 SDJNR 1305</b>	16.2	22.0	16.2	6.0	7.0		DN... 1305... RHINO TURN A276-A281
<b>93°</b> 	<b>QE1 SDJNR 0803-TB</b>	16.2	22.0	16.2	6.0	7.0		DN...X 0803... RHINO TURN A281
	<b>QE1 SDJNR 1305-TB</b>	16.2	22.0	20.0	6.0	7.0		DN... 1305... RHINO TURN A276-A281


## Spare parts

Designation	Screw	Cooling unit	Wrench			
...0803	TS 25D060/HG-P	-	T 7P			
...0803-TB	TS 25D060/HG-P	S-CU-TB	T 7P			
...1305	TG 40G110I	-	T 15			
...1305-TB	TG 40G110I	S-CU-TB	T 15			

# QE1 SVJBR QE1 SVJBR-TB



Screw type modular heads for external turning

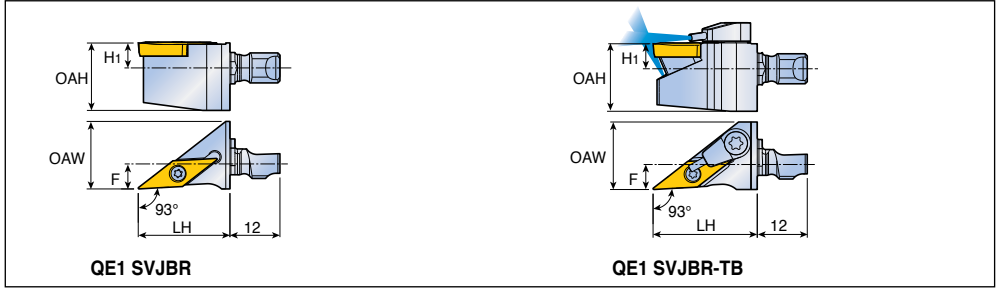


Approach angle	Designation	Dimension (mm)					Shank	Insert
		OAH	LH	OAW	H1	F		
93°	<b>QE1 SVJBR 11</b>	16.2	25.0	16.2	6.0	7.0	QE1 S12N-TB QE1 S16R-TB	VB.. 1103.. A330, A331, A365
93°	<b>QE1 SVJBR 11-TB</b>	16.2	25.0	16.2	6.0	7.0		

## Spare parts

Designation	Screw	Cooling unit	Wrench			
...11	SO 25065I	-	T 7			
...11-TB	SO 25065I	S-CU-TB	T 7			

# QE1 SVJCR QE1 SVJCR-TB

Screw type modular heads for external turning

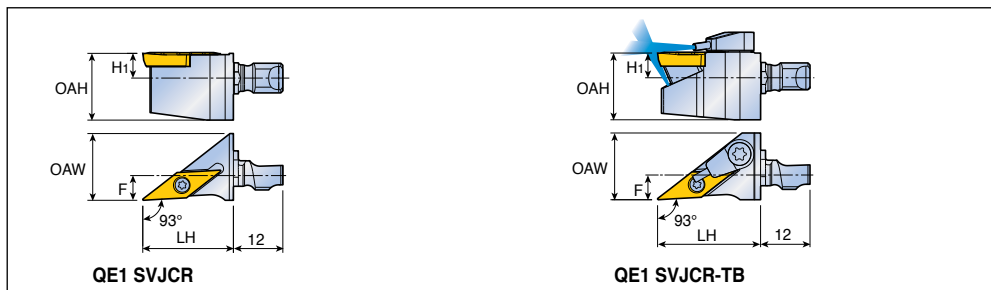

Approach angle	Designation	Dimension (mm)					Shank	Insert
		OAH	LH	OAW	H1	F		
<b>93°</b>	<b>QE1 SVJCR 11</b>	16.2	25.0	16.2	6.0	7.0	QE1 S12N-TB QE1 S16R-TB	VC... 1103...  A330, A331, A365
<b>93°</b>	<b>QE1 SVJCR 11-TB</b>	16.2	25.0	16.2	6.0	7.0		


## Spare parts





Designation	Screw	Cooling unit	Wrench			
<b>...11</b>	SO 25065I	-	T 7			
<b>...11-TB</b>	SO 25065I	S-CU-TB	T 7			

# QE1B SVXCR QE1B SVXCR-TB



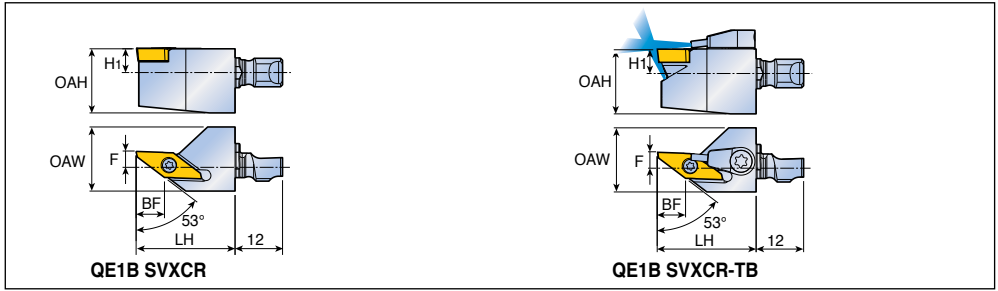


Screw type modular heads for back turning




Approach angle	Designation	Dimension (mm)						Shank	Insert
		OAH	LH	OAW	BF	H1	F		
<b>53°</b> 	<b>QE1B SVXCR 11</b>	16.2	25.0	16.2	7.2	6.0	3.0	QE1 S12N-TB QE1 S16R-TB	BTVC 1103..  A308
<b>53°</b>  COOLBURST	<b>QE1B SVXCR 11-TB</b>	16.2	25.0	16.2	7.2	6.0	3.0	QE1 S12N-TB QE1 S16R-TB	BTVC 1103..  A308

## Spare parts

Designation	Screw	Cooling unit	Wrench			
...11	SO 25065I 	- 	T 7 			
...11-TB	SO 25065I	S-CU-TB	T 7			

# QE1Y SDJCR QE1Y SDJCR-TB

## Screw type Y-axis modular heads

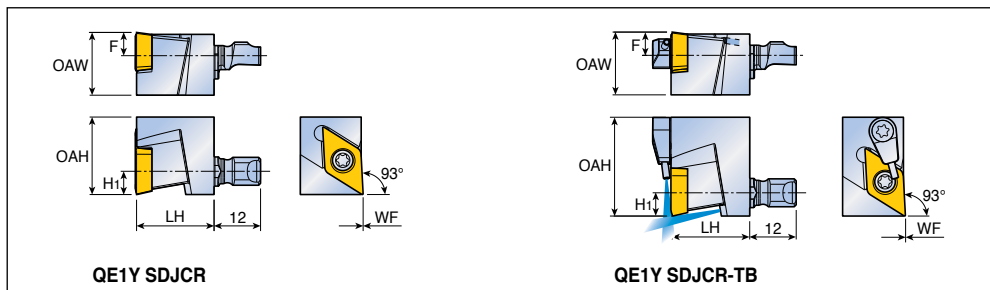


Approach angle	Designation	Dimension (mm)						Shank	Insert
		OAW	OAH	LH	WF	H1	F		
<b>93°</b>	<b>QE1Y SDJCR 11</b>	16.2	20.0	20.0	0.0	6.0	7.0	QE1 S12N-TB QE1 S16L-TB	DC.. 11T3.. A314-A317, A361
<b>93°</b>	<b>QE1Y SDJCR 11-TB</b>	16.2	25.5	20.0	0.0	6.0	7.0		

## Spare parts

Designation	Screw	Cooling unit	Wrench			
	...11	SO 35080I 	- 	T 15 		
...11-TB	SO 35080I	S-CU-TB	T 15			

# QE1 S12N-TB

High pressure coolant shanks for FLEX-TURN modular head

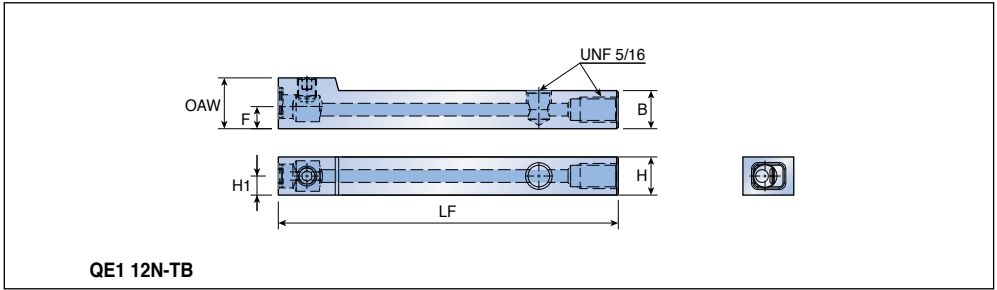

QE1 12N-TB

Designation	Dimension (mm)						Modular head
	H	H1	B	LF	OAW	F	
<b>QE1 S12N-TB</b>	12	6	12	107	16	7	QE1...R(-TB) QE1B...R(-TB) A166-A171 QE1Y...R(-TB)

Head designation	70 bar flow rate (ℓ/min)	100 bar flow rate (ℓ/min)	140 bar flow rate (ℓ/min)
<b>QE1 SDJCR-TB *</b>	9-11	11-13	14-16
<b>QE1B SVXCR-TB</b>	8-10	9-11	11-13
<b>QE1Y SDJCR-TB</b>	13-15	15-17	18-20

\* QE1 SVJBR, SVJCR, SDJNR same flow rate


## Spare parts

Designation	Screw	Plug	Wrench	
<b>QE1...-TB</b>	SS M6F-7	PLG 5/16 UNF	L-W 3	L-W 5/32

\* Please refer to A165 page for COOL-BURST accessories

# QE1 S16R/L-TB

High pressure coolant shanks for FLEX-TURN modular head

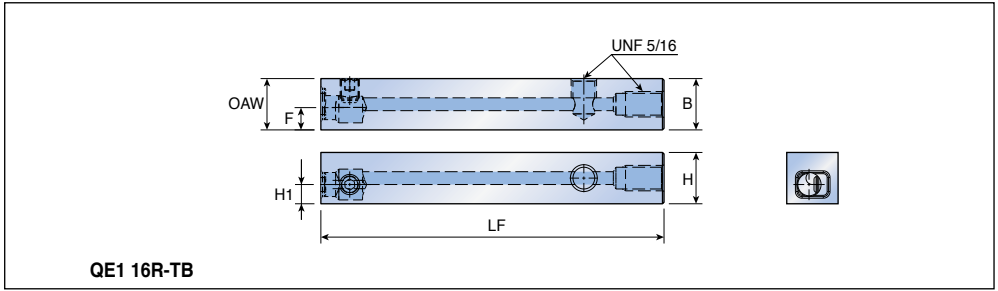

Designation	Dimension (mm)						Modular head
	H	H1	B	LF	OAW	F	
<b>QE1 S16R-TB</b>	16	6	16	107	16	7	QE1...R(-TB) QE1B...R(-TB) QE1Y...R(-TB) A166-A171
<b>QE1 S16L-TB</b>	16	6	16	107	16	7	

Head designation	70 bar flow rate (ℓ/min)	100 bar flow rate (ℓ/min)	140 bar flow rate (ℓ/min)
<b>QE1 SDJCR-TB *</b>	9-11	11-13	14-16
<b>QE1B SVXCR-TB</b>	8-10	9-11	11-13
<b>QE1Y SDJCR-TB</b>	13-15	15-17	18-20

\* QE1 SVJBR, SVJCR, SDJNR same flow rate

## Spare parts

Designation	Screw	Plug	Wrench	
<b>QE1...-TB</b>	SS M6F-7	PLG 5/16 UNF	L-W 3	L-W 5/32

Please refer to A165 page for COOL-BURST accessories

## C4-T C L N R

1

2

3

4

5

6

### 1 Coupling size

	Symbol	DCONMS(mm)
	C4	40
	C5	50
	C6	63

### 2 Clamping system

<b>P</b>	<b>C</b>	<b>S</b>	<b>M</b>	<b>T</b>	<b>W</b>	<b>H</b>
Lever lock	Top clamp	Screw clamp	Multi lock	T-holder	Wedge clamp	Hook lever

### 3 Insert shape

C	D	E	H	K	R	S	T	V	W

### 4 Approach angle

Symbol	Shape	Offset	Symbol	Shape	Offset	Symbol	Shape	Offset
A		x	J		o	V		x
			K		o	W		o
B		x	L		o	X	Special angle	
			M		x	C*		x
D		x	N		x	H*		o
E		x	R		o	Q*		o
F		o	S		o			
G		o	T		o			
			U		o			

\* TaeguTec standard

# 27 055 - 09


7

8


9

10


## 5 Insert clearance angle

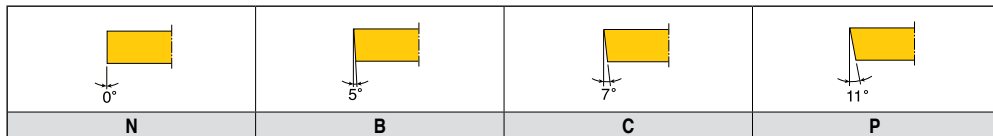


## 6 Hand of tool

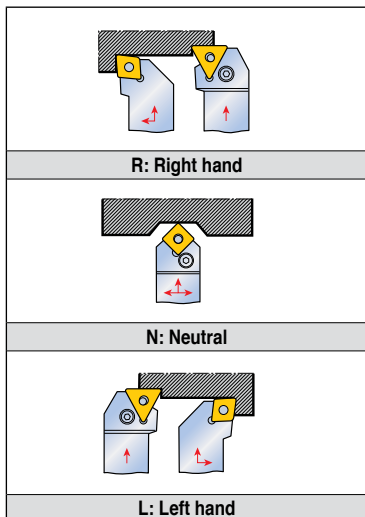


## 7 WF dimension (mm)

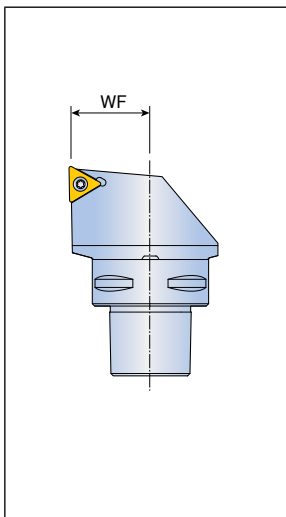


## 8 Tool length (mm)

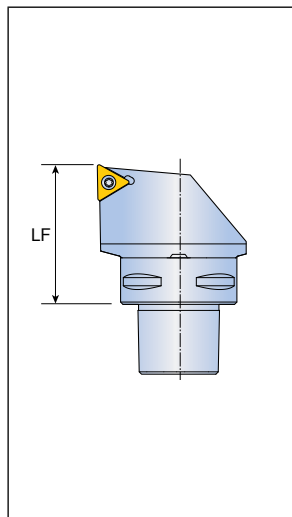

## 9 Cutting edge length

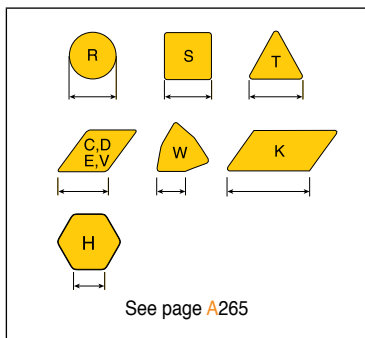


## 10 Manufacturer's type designation



# HCLNR/L HDJNR/L



Hook lever type holders with C-ADAPTER

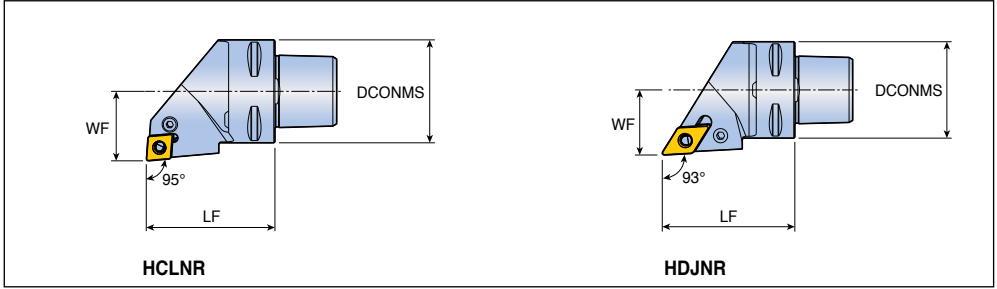

Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
95°	<b>C4-HCLNR/L 27050-0904</b>	40	27	50	CN... 0904... A266, A268-A273
93°	<b>C4-HDJNR/L 27055-1305</b>	40	27	55	DN... 1305... A276-A281


## Spare parts

Designation	Lever	Screw	Shim		Shim pin	Shim pin punch	Nozzle	Wrench
<b>C4...HCLNR/L</b>	LCL 09-NX	LCS 3	LSC 32	-	LSP 3A	SPP 3-4	NZ 83	L-W 2.5
<b>C4...HDJNR/L</b>	LCL 11-NX	LCS 4	-	LSD 3.52	LSP 4	SPP 3-4	NZ 83	L-W 3

# HSSNR/L HTGNR/L HTJNR/L



Hook lever type holders with C-ADAPTER

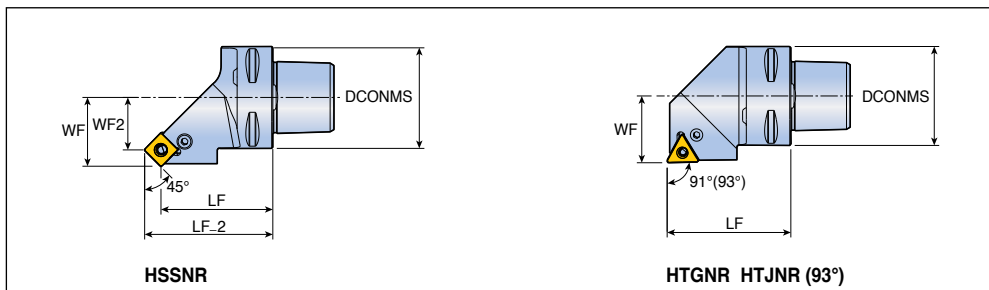






Approach angle	Designation	Dimension (mm)					Insert
		DCONMS	WF	WF2	LF	LF_2	
<b>45°</b>	<b>C4-HSSNR/L 27042-0904</b>	40	27	20.6	44	50.3	SN... 0904... A286-A289
<b>91°(93°)</b>	<b>C4-HTGNR/L 27050-1304</b>	40	27	-	50	-	TN... 1304... A291-A296
	<b>C4-HTJNR/L 27050-1304</b>	40	27	-	50	-	

## Spare parts





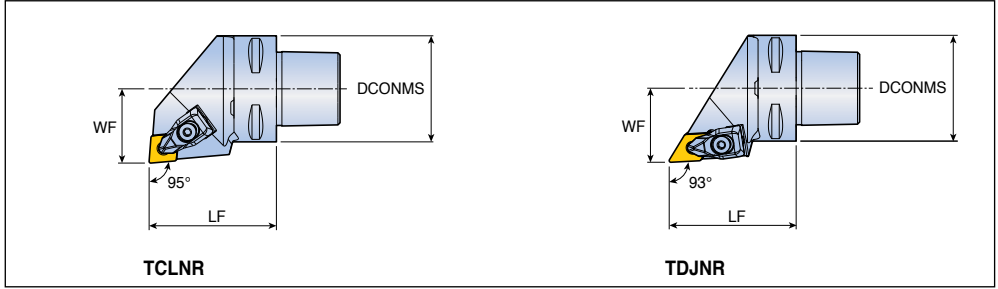




Designation	Lever	Screw	Shim		Shim pin	Shim pin punch	Nozzle	Wrench
<b>C4...0904</b>	LCL 09-NX	LCS 3	LSS 32A	-	LSP 3A	SPP 3-4	NZ 83	L-W 2.5
<b>C4...1304</b>	LCL 08-NX	LCS 3-NX	-	LST 2.51.8	LSP 3B	SPP 3-3L	NZ 83	L-W 2.5

## T-holders with C-ADAPTER




Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
 95°	<b>C4-TCLNR/L 27050-12</b>	40	27	50	CN...1204...  A266, A268-A275, CN...1606... A341, A342, CN...1906... A353
	<b>C5-TCLNR/L 35060-12</b>	50	35	60	
	<b>C6-TCLNR/L 45065-12</b>	63	45	65	
	<b>C4-TCLNR/L 27055-16</b>	40	27	55	
	<b>C5-TCLNR/L 35060-19</b>	50	35	60	
	<b>C6-TCLNR/L 45065-19</b>	63	45	65	
 93°	<b>C4-TDJNR/L 27055-1504</b>	40	27	55	DN...1504...  DN...1506... A276-A281, DN...1504... A343, A354 DN...1506... DN...1504... DN...1506...
	<b>C4-TDJNR/L 27055-1506</b>	40	27	55	
	<b>C5-TDJNR/L 35060-1504</b>	50	35	60	
	<b>C5-TDJNR/L 35060-1506</b>	50	35	60	
	<b>C6-TDJNR/L 45065-1504</b>	63	45	65	
	<b>C6-TDJNR/L 45065-1506</b>	63	45	65	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim		Shim screw	Nozzle	Wrench	
									
<b>C4...12</b>	DLM 4	DLS 4	DSP 4	TSC 44	-	SO 40050I	NZ 83	L-W 3	T 15
<b>...12</b>	DLM 4	DLS 4	DSP 4	TSC 44	-	SO 40050I	NZ 104	L-W 3	T 15
<b>...16</b>	DLM 5	DLS 5	DSP 5	TSC 54	-	SO 50090I	NZ 83	L-W 4	T 20
<b>...19</b>	DLM 6	DLS 5	DSP 5	LSC 63	-	SO 80180I	NZ 104	L-W 4	T 20
<b>...1504</b>	DLM 4	DLS 4	DSP 4	-	TSD 44	SO 40050I	NZ 83	L-W 3	T 15
<b>C4...1506</b>	DLM 4	DLS 4	DSP 4	-	TSD 43	SO 40050I	NZ 83	L-W 3	T 15
<b>...1506</b>	DLM 4	DLS 4	DSP 4	-	TSD 43	SO 40050I	NZ 104	L-W 3	T 15

## T-holders with C-ADAPTER

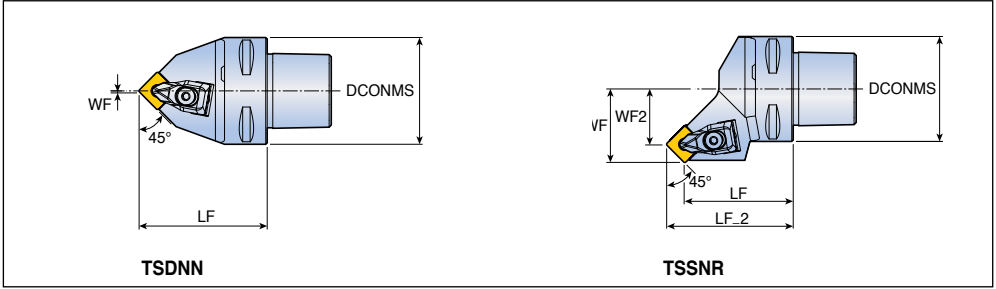






Approach angle	Designation	Dimension (mm)					Insert
		DCONMS	WF	WF2	LF	LF_2	
45°	<b>C4-TSDNN 00050-12</b>	40	0.3	-	50	-	SN...1204... A284, A286-A290
	<b>C5-TSDNN 00060-12</b>	50	0.3	-	60	-	
	<b>C6-TSDNN 00065-12</b>	63	0.3	-	65	-	
45°	<b>C4-TSSNR/L 27042-12</b>	40	27	18.7	42	50.3	
	<b>C5-TSSNR/L 35052-12</b>	50	35	26.7	52	60.3	
	<b>C6-TSSNR/L 45056-12</b>	63	45	36.7	56	64.3	

## Spare parts





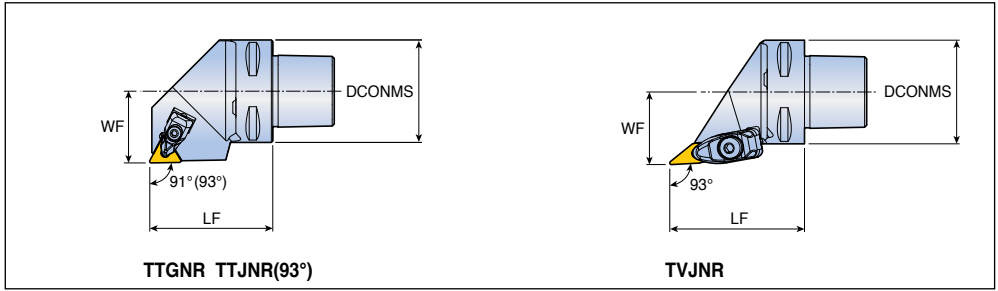




Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>C4...12</b>	DLM 4	DLS 4	DSP 4	TSS 44	SO 40050I	NZ 83	L-W 3	T 15
<b>...12</b>	DLM 4	DLS 4	DSP 4	TSS 44	SO 40050I	NZ 104	L-W 3	T 15

## T-holders with C-ADAPTER




Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
<b>91°(93°)</b> 	<b>C4-TTGNR/L 27050-16</b>	40	27	50	TN...1604...  A291-A296, A349, A357
	<b>C5-TTGNR/L 35060-16</b>	50	35	60	
	<b>C6-TTGNR/L 45065-16</b>	63	45	65	
	<b>C4-TTJNR/L 27050-16</b>	40	27	50	
	<b>C5-TTJNR/L 35060-16</b>	50	35	60	
	<b>C6-TTJNR/L 45065-16</b>	63	45	65	
<b>93°</b> 	<b>C4-TVJNR/L 27062-16</b>	40	27	62	VN...1604...  A297, A298, A358
	<b>C5-TVJNR/L 35065-16</b>	50	35	65	
	<b>C6-TVJNR/L 45068-16</b>	63	45	68	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim		Shim screw	Nozzle	Wrench	
<b>C4...TT...16</b>									
<b>...TT...16</b>	DLM 3	DLS 3	DSP 3	TST 33	-	SO 35080I	NZ 83	L-W 2.5	T 15
<b>C4...TV...16</b>	DLM 3V	DLS 5	DSP 5	-	TSV 33	SO 35080I	NZ 83	L-W 4	T 15
<b>...TV...16</b>	DLM 3V	DLS 5	DSP 5	-	TSV 33	SO 35080I	NZ 104	L-W 4	T 15

## T-holders with C-ADAPTER

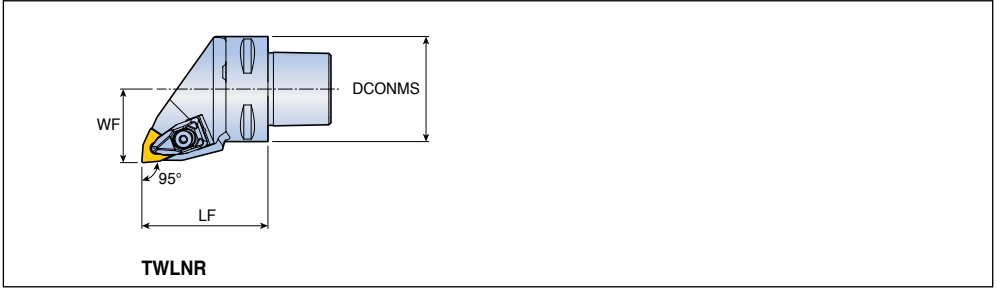

Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
95°	<b>C4-TWLNR/L 27050-06</b>	40	27	50	WN...G 0604...
	<b>C4-TWLNR/L 27050-08</b>	40	27	50	WN... 0804...
	<b>C5-TWLNR/L 35060-08</b>	50	35	60	A300-A302, A350, A359
	<b>C6-TWLNR/L 45065-08</b>	63	45	65	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
...06								
<b>C4...08</b>	DLM 3	DLS 3	DSP 3	PSW 32	SO 40090I	NZ 83	L-W 2.5	T 15
<b>...08</b>	DLM 4	DLS 4	DSP 4	TSW 44	SO 40050I	NZ 83	L-W 3	T 15
	DLM 4	DLS 4	DSP 4	TSW 44	SO 40050I	NZ 104	L-W 3	T 15






# TZQNR/L-TB



## High pressure T-holders with C-ADAPTER

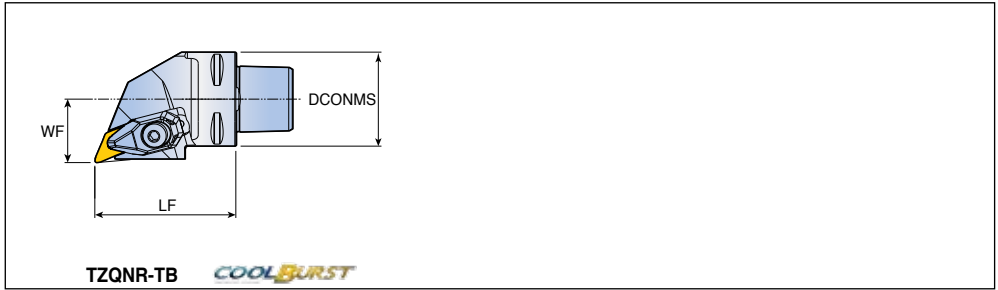

Approach angle	Designation	Dimension (mm)			Insert
		WF	LF	DCONMS	
<b>ZNMV</b> 23°(BWT) 95°(FWT)	<b>C4-TZQNR/L 27060-1410-TB</b>	27	60	40	ZNMV 1410... POSSTURN A307
	<b>C5-TZQNR/L 35060-1410-TB</b>	35	60	50	
	<b>C6-TZQNR/L 45065-1410-TB</b>	45	65	60	



- BWT: Backward turning
- FWT: Forward turning


### Spare parts





Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...-TB	DLM 3.3Z-NV	DLS 5	DSP 5	TSZ 140310	TS 35083/HG	L-W 4	T 10

# SCLCR/L SDJCR/L





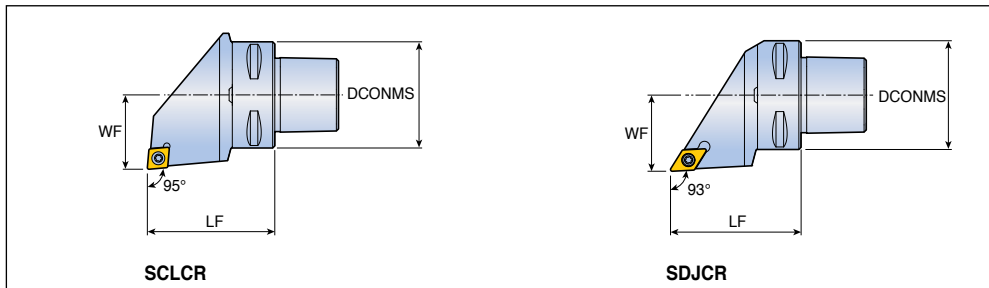




Screw type holders with C-ADAPTER



Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
 95°	<b>C4-SCLCR/L 27050-09</b>	40	27	50	CC... 09T3...  A309-A312, A360
	<b>C5-SCLCR/L 35060-09</b>	50	35	60	
	<b>C6-SCLCR/L 45065-09</b>	63	45	65	
	<b>C4-SCLCR/L 27050-12</b>	40	27	50	
	<b>C5-SCLCR/L 35060-12</b>	50	35	60	
	<b>C6-SCLCR/L 45065-12</b>	63	45	65	
 93°	<b>C4-SDJCR/L 27050-11</b>	40	27	50	DC... 11T3...  A314-A317, A361
	<b>C5-SDJCR/L 35060-11</b>	50	35	60	
	<b>C6-SDJCR/L 45065-11</b>	63	45	65	


## Spare parts






Designation	Screw	Shim		Shim screw	Nozzle	Wrench	
							
<b>C4...09</b>	SO 35124I	SSC 32	-	SO 50090S	NZ 83	T 15	L-W 3.5
<b>...09</b>	SO 35124I	SSC 32	-	SO 50090S	NZ 104	T 15	L-W 3.5
<b>C4...11</b>	SO 35124I	-	SSD 32	SO 50090S	NZ 83	T 15	L-W 3.5
<b>...11</b>	SO 35124I	-	SSD 32	SO 50090S	NZ 104	T 15	L-W 3.5
<b>C4...12</b>	SO 45130I	SSC 43N	-	SO 60105S	NZ 83	T 20	L-W 5
<b>...12</b>	SO 45130I	SSC 43N	-	SO 60105S	NZ 104	T 20	L-W 5

# SRDCN STGCR/L STJCR/L





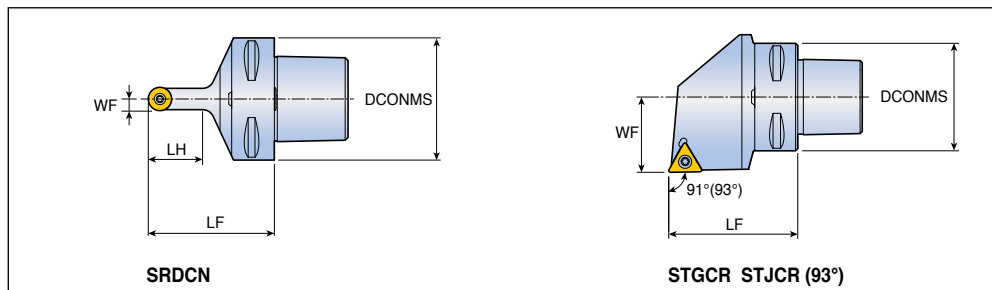




Screw type holders with C-ADAPTER







Approach angle	Designation	Dimension (mm)				Insert	
		DCONMS	WF	LF	LH		
<b>45°</b> 	<b>C4-SRDCN 00050-10A</b>	40	5	50	25	RC...T 10T300  A320	
	<b>C5-SRDCN 00060-10A</b>	50	5	60	25		
	<b>C6-SRDCN 00065-10A</b>	63	5	65	25		
		<b>C4-SRDCN 00050-12A</b>	40	6	50	28	RC...T 120400
		<b>C5-SRDCN 00060-12A</b>	50	6	60	28	
		<b>C6-SRDCN 00065-12A</b>	63	6	65	28	
<b>91°(93°)</b> 	<b>C4-STGCR/L 27050-16</b>	40	27	50	-	TC... 16T3...  A325, A363, A364	
	<b>C5-STGCR/L 35060-16</b>	50	35	60	-		
	<b>C4-STJCR/L 27050-16</b>	40	27	50	-		
	<b>C5-STJCR/L 35060-16</b>	50	35	60	-		

## Spare parts





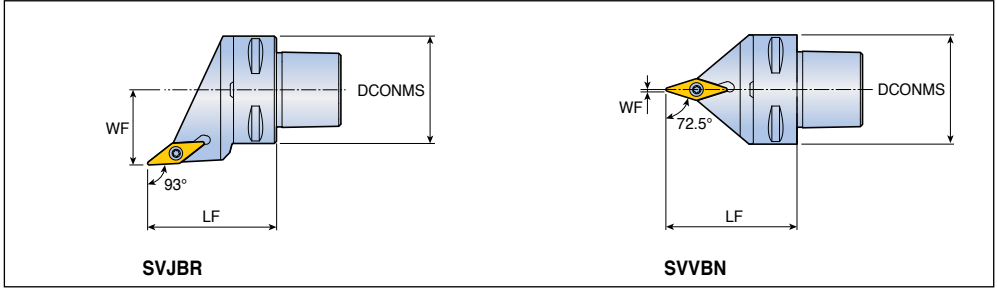

Designation	Screw	Shim		Shim screw	Nozzle	Wrench	
							
<b>C4...10A</b>	TS 40097I	TRC 3-0	-	SR TC-3	NZ 62	T 15	-
<b>...10A</b>	TS 40097I	TRC 3-0	-	SR TC-3	NZ 62	T 15	-
<b>C4...12A</b>	SO 40050I	TRC 4-0	-	SR TC-4S	NZ 62	T 15	-
<b>...12A</b>	SO 40050I	TRC 4-0	-	SR TC-4S	NZ 62	T 15	-
<b>C4...16</b>	SO 35124I	-	SST 32	SO 50090S	NZ 83	T 15	L-W 3.5
<b>...16</b>	SO 35124I	-	SST 32	SO 50090S	NZ 104	T 15	L-W 3.5

## Screw type holders with C-ADAPTER




Approach angle	Designation	Dimension (mm)			Insert
		DCONMS	WF	LF	
<b>93°</b> 	<b>C4-SVJBR/L 27050-16</b>	40	27	50	VB...T 1604...  A330, A331, A365
	<b>C5-SVJBR/L 35060-16</b>	50	35	60	
	<b>C6-SVJBR/L 45065-16</b>	63	45	65	
<b>72.5°</b> 	<b>C4-SVVBN 00050-16</b>	40	0.6	50	
	<b>C5-SVVBN 00060-16</b>	50	0.6	60	
	<b>C6-SVVBN 00065-16</b>	63	0.6	65	

## Spare parts

Designation	Screw	Shim	Shim screw	Nozzle	Wrench			
								
<b>C4...16</b>	SO 35124I	SSV 32	SO 50090S	NZ 83	T 15	L-W 3.5		
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	NZ 104	T 15	L-W 3.5		

## C-ADAPTERs with HUSH-BORE head connection

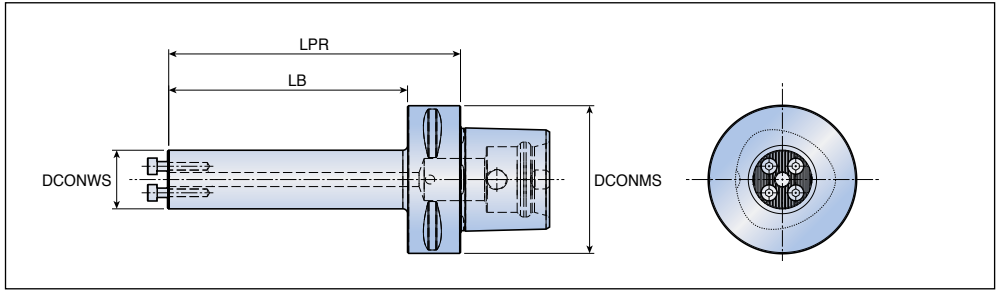


Designation	Dimension (mm)				Coolant hole
	DCONMS	DCONWS	LPR	LB	
<b>C4-CS16A-2.5D</b>	40	16	40	20	●
<b>C4-CS20A-2.5D</b>	40	20	50	30	●
<b>C4-CS25A-2.5D</b>	40	25	55	35	●
<b>C4-CS32A-2.5D</b>	40	32	75	55	●
<b>C4-CS40A-3D</b>	40	40	80	80	●
<b>C5-CS16A-2.5D</b>	50	16	40	20	●
<b>C5-CS20A-2.5D</b>	50	20	50	30	●
<b>C5-CS25A-2.5D</b>	50	25	55	35	●
<b>C5-CS32A-2.5D</b>	50	32	75	55	●
<b>C5-CS40A-3D</b>	50	40	100	80	●
<b>C6-CS16A-2.5D</b>	63	16	40	18	●
<b>C6-CS20A-2.5D</b>	63	20	50	28	●
<b>C6-CS25A-2.5D</b>	63	25	65	43	●
<b>C6-CS32A-3D</b>	63	32	90	68	●
<b>C6-CS32A-4D</b>	63	32	125	103	●
<b>C6-CS40A-3D</b>	63	40	100	78	●
<b>C6-CS40A-4D</b>	63	40	140	118	●
<b>C6-CS16E-5D</b>	63	16	80	58	●
<b>C6-CS20E-5D</b>	63	20	100	78	●
<b>C6-CS25E-5D</b>	63	25	115	93	●
<b>C6-CS32E-5D</b>	63	32	150	128	●
<b>C6-CS40E-5D</b>	63	40	185	163	●

## Spare parts

Designation	Screw	Wrench			
<b>CS16</b>	SH M3x0.5X10	L-W 2.5			
<b>CS20</b>	SH M3.5x0.6X10	L-W 2.5			
<b>CS25</b>	SH M4x0.7X12	L-W 3.0			
<b>CS32</b>	SH M5x0.8X12	L-W 4.0			
<b>CS40</b>	SH M6x1X16	L-W 5.0			

• Please refer to A253-A262 pages for HUSH-BORE heads

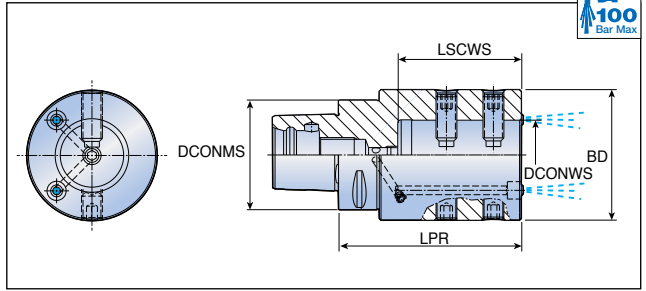


Designation	Dimension (mm)				
	DCONMS	DCONWS	BD	LPR	LSCWS
<b>C4 ABB 25-60</b>	40	25	63	100	60
<b>C5 ABB 25-60</b>	50	25	63	100	60
<b>C6 ABB 25-60</b>	63	25	63	100	60
<b>ABB 40-70</b>	63	40	75	105	71
<b>C8 ABB 25-60</b>	80	25	63	100	60
<b>ABB 40-72</b>	80	40	75	105	71

### Spare parts

Designation	Stopper screw	Screw		Nozzle	Wrench	
<b>C...60</b>	SR M10x6 DIN913 <sup>(1)</sup>	SR M10x20 DIN915 <sup>(3)</sup>	SR M10x12 DIN1835-B <sup>(2)</sup>	SATZ- M12x1-M6	HP M12*	L-W 5*
<b>C...70/72</b>	SR M10x6 DIN913 <sup>(1)</sup>	SR M12x30 DIN915 <sup>(3)</sup>	SR M12x16 DIN1835-B <sup>(2)</sup>	SATZ- M12x1-M6	HP M12*	L-W 6*

• \*Marked: Optional, should be ordered separately  
 • <sup>(1)</sup> Rear stopper screw <sup>(2)</sup> Used on A-type sleeves <sup>(3)</sup> Used on B-type sleeves

## Reduction sleeves for bars, used in holders with exchangeable adaptation

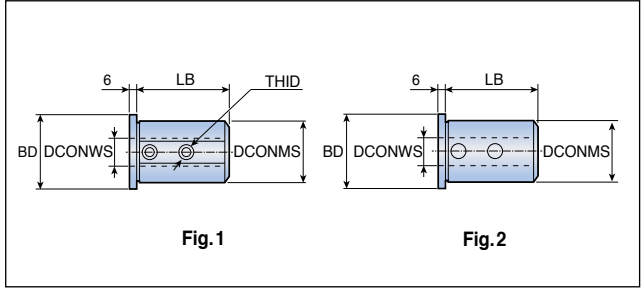


Designation	Dimension (mm)					Fig.
	DCONMS	DCONWS	BD	LB	THID	
<b>SC 25T6A</b>	25	6	31	56	M6	1
<b>25T8A</b>	25	8	31	56	M8	1
<b>25T10A</b>	25	10	31	56	M8	1
<b>25T12A</b>	25	12	31	56	M8	1
<b>25T16B</b>	25	16	31	56	-	2
<b>25T20B</b>	25	20	31	56	-	2
<b>SC 40T6A</b>	40	6	46	60	M6	1
<b>40T8A</b>	40	8	46	60	M8	1
<b>40T10A</b>	40	10	46	60	M8	1
<b>40T12A</b>	40	12	46	60	M8	1
<b>40T16B</b>	40	16	46	60	-	2
<b>40T20B</b>	40	20	46	60	-	2
<b>40T25B</b>	40	25	46	60	-	2
<b>40T32B</b>	40	32	46	60	-	2
<b>SC 50T6A</b>	50	6	56	70	M6	1
<b>50T8A</b>	50	8	56	70	M8	1
<b>50T10A</b>	50	10	56	70	M8	1
<b>50T12A</b>	50	12	56	70	M8	1
<b>50T16B</b>	50	16	56	80	-	2
<b>50T20B</b>	50	20	56	80	-	2
<b>50T25B</b>	50	25	56	80	-	2
<b>50T32B</b>	50	32	56	80	-	2

## Spare parts

Designation	Screw		Wrench		
<b>...25T/50T 6A</b>	SR M6x6 DIN916	-	L-W 3*		
<b>...25T 8A/10A/12A</b>	SR M8x6 DIN916	-	L-W 4*		
<b>...50T 8A/10A/12A</b>	SR M8x6 DIN916	-	L-W 4*		
<b>...40T 6A</b>	-	SR M6x10 DIN1835-B	L-W 3*		
<b>...40T 8A/10A/12A</b>	-	SR M8x10 DIN1835-B	L-W 4*		


\*Marked: Optional, should be ordered separately

## Holders for boring bars with C-ADAPTER exchangeable shanks

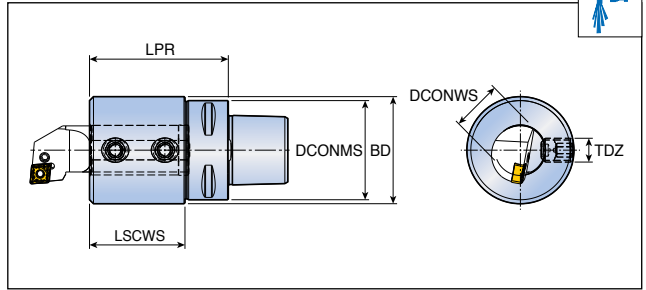

Designation	Dimension (mm)					
	DCONMS	LPR	LSCWS	DCONWS	BD	TDZ
<b>C3 ADI 10</b>	32	50	20	10	36	M6
<b>ADI 12</b>	32	50	21.5	12	36	M8
<b>ADI 16</b>	32	50	29.5	16	36	M8
<b>C4 ADI 10</b>	40	50	20	10	36	M6
<b>ADI 12</b>	40	50	24	12	36	M8
<b>ADI 16</b>	40	50	32	16	36	M8
<b>ADI 20</b>	40	70	49	20	55	M12
<b>ADI 25</b>	40	70	45	25	54	M12
<b>C5 ADI 10</b>	50	60	26	10	36	M6
<b>ADI 12</b>	50	60	26	12	36	M8
<b>ADI 16</b>	50	60	32	16	36	M8
<b>ADI 20</b>	50	75	49	20	55	M12
<b>ADI 25</b>	50	85	60	25	60	M12
<b>ADI 32</b>	50	100	76	32	68	M12
<b>C6 ADI 12</b>	63	65	36	12	36	M8
<b>ADI 16</b>	63	65	36	16	36	M8
<b>ADI 20</b>	63	65	40	20	36	M10
<b>ADI 25</b>	63	76	51	25	54	M12
<b>ADI 32</b>	63	100	76	32	68	M12
<b>ADI 40</b>	63	100	76	40	98	M12
<b>ADI 50</b>	63	115	76	50	98	M12

## Holders for boring bars with C-ADAPTER exchangeable shanks

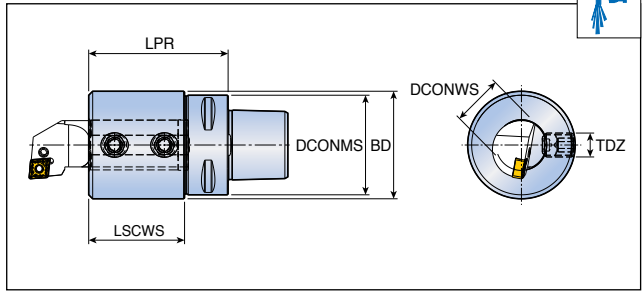


Designation	Dimension (mm)					
	DCONMS	LPR	LSCWS	DCONWS	BD	TDZ
<b>C8 ADI 12</b>	80	70	36	12	36	M8
<b>ADI 16</b>	80	70	36	16	36	M8
<b>ADI 20</b>	80	70	40	20	36	M10
<b>ADI 25</b>	80	80	51	25	54	M12
<b>ADI 32</b>	80	110	86	32	68	M12
<b>ADI 40</b>	80	115	86	40	98	M12
<b>ADI 50</b>	80	115	86	50	98	M12

### Spare parts

Designation	Screw	Wrench				
<b>...10</b>	SR M6x10 DIN1835-B	L-W 3*				
<b>...12/16</b>	SR M8x10 DIN1835-B	L-W 4*				
<b>...20</b>	SR M10x12 DIN1835-B	L-W 5*				
<b>...25/32/40/50</b>	SR M12x16 DIN1835-B	L-W 6*				

\*Marked: Optional, should be ordered separately

Holders with C-ADAPTER exchangeable shanks for external square-shank tools

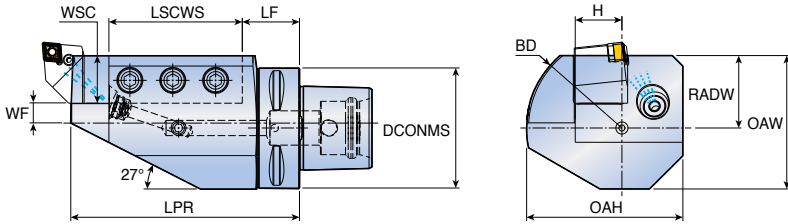

Left-hand shown


Designation	Dimension (mm)										
	DCONMS	LPR	LSCWS	LF	WF	H	WSC	OAH	RADW	OAW	BD
<b>C4 ASHR/L 16-1</b>	40	104	70	34	16	16	16	50	23	43.5	60
<b>C5 ASHR/L 20-1</b>	50	98	63.5	24.5	10	20	20	78	30	59	90
<b>C6 ASHR/L 20-1</b>	63	100	63.5	36.5	20	20	20	78	30	59	90
<b>ASHR/L 25-1</b>	63	120	70	30	13	25	25	82	38	70	100
<b>C8 ASHR/L 32-1</b>	80	140	95	35	8	32	32	87	40	80	110

## Spare parts

Designation	Screw	Nozzle	Wrench	
<b>...16-1</b>	SR M8x16 DIN915	SATZ-M10x1-M5	HP M10*	L-W 5*
<b>...20-1</b>	SR M10x25 DIN915	SATZ-M10x1-M5	HP M10*	L-W 5*
<b>...25-1/32-1</b>	SR M12x30 DIN915	SATZ-M12x1-M6	HP M12*	L-W 6*

\*Marked: Optional, should be ordered separately

Holders with C-ADAPTER shanks carrying square shank tools for 45° mounting on turn-mill machines

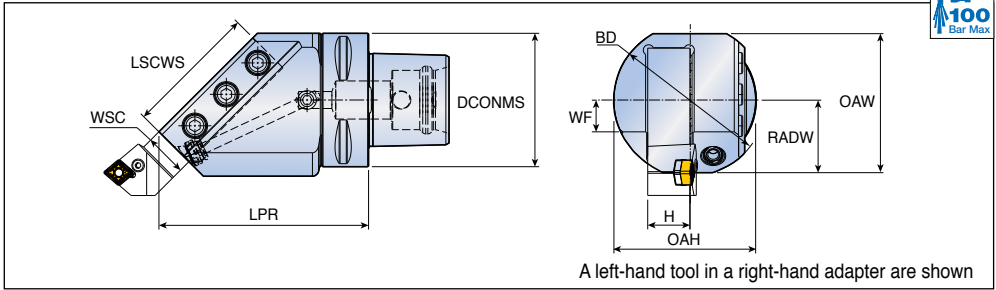


Designation	Dimension (mm)									
	DCONMS	H	WSC	LSCWS	LPR	OAH	RADW	OAW	WF	BD
<b>C5 ASHR/L 20-45</b>	50	20	20	-	127	62	36	67.5	15	72
<b>C6 ASHR/L 20-45</b>	63	20	20	70	102	62	41.6	67.5	15	72
<b>ASHR/L 25-45</b>	63	25	25	70	102	83	41.6	79.6	15	100
<b>C8 ASHR/L 32-45</b>	80	32	32	100	140	110	50	110	17	140

### Spare parts

Designation	Screw	Nozzle	Wrench	
<b>...20-45</b>	SR M10x25 DIN915	SATZ-M10x1-M5	HP M10*	L-W 5*
<b>...25-45</b>	SR M12x30 DIN915	SATZ-M10x1-M5	HP M10*	L-W 6*
<b>...32-45</b>	SR M12x30 DIN915	SATZ-M12x1-M6	HP M12*	L-W 6*

\*Marked: Optional, should be ordered separately

## Perpendicular holders with C-ADAPTER shanks for external square-shank tools

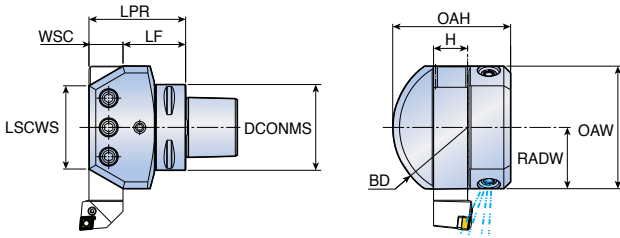


Designation	Dimension (mm)										
	DCONMS	H	WSC	LPR	LSCWS	LF	RADW	OAW	OAH	BD	
<b>C5 ASHA 20</b>	50	20	20	58	46	38	38	76	76.5	90	
<b>C6 ASHA 20</b>	63	20	20	60	46	40	38	76	76.5	90	
<b>ASHA 25</b>	63	25	25	71	61	46	45	90	86.6	110	
<b>C8 ASHA 32</b>	80	32	32	85	80	53	55	100	95	142	

## Spare parts

Designation	Screw	Nozzle	Wrench	
<b>...20</b>	SR M10x25 DIN915	SATZ-M10x1-M5	HP M10*	L-W 5*
<b>...25</b>	SR M12x30 DIN915	SATZ-M12x1-M6	HP M12*	L-W 6*
<b>...32</b>	SR M12x30 DIN915	SATZ-M12x1-M6	HP M12*	L-W 6*

\*Marked: Optional, should be ordered separately

## Holders with C-ADAPTER exchangeable shanks for external square-shank tools

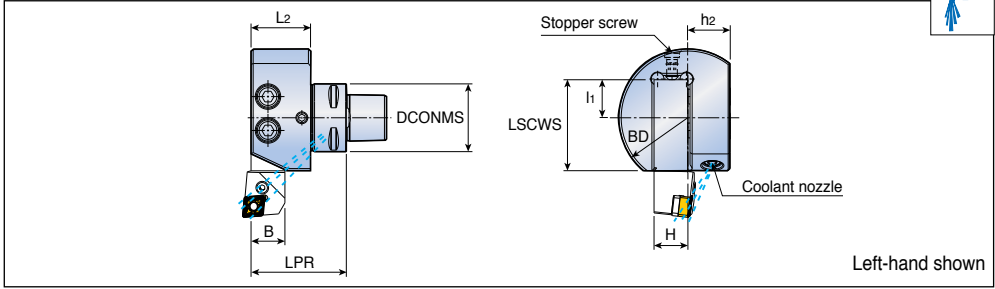

Left-hand shown

Designation	Dimension (mm)								
	DCONMS	LPR	L2	B	BD	LSCWS	l1	H	h2
<b>C3 ADE-16R/L</b>	32	45	28.1	16	65	45	20	16	20
<b>C4 ADE-20R/L</b>	40	49.2	29.1	20	87	57	32	20	26
<b>C5 ADE-20R/L</b>	50	55.2	35.1	20	87	57	32	20	26

### Spare parts

Designation	Stopper screw	Screw	Nozzle	Wrench
<b>C3...16R/L</b>	SR M6x8 DIN916 <sup>(1)</sup>	SR M10x20 DIN915	SATZ-M8x1-M3	L-W 3*, L-W 5*
<b>C4...20R/L</b>	SR M8x10 DIN913 <sup>(1)</sup>	SR M10x20 DIN912	EZ 125	L-W 4*, L-W 8*
<b>C5...20R/L</b>	SR M8x10 DIN916 <sup>(1)</sup>	SR M10x16	EZ 125	L-W 4*, L-W 8*



\*Marked: Optional, should be ordered separately <sup>(1)</sup>Marked: Stopper screw

## S 32 S - C T F P R - 16 -

1 2 3 4 5 6 7 8 9 10

### 1 Boring bar

S	Steel shank
A	Coolant through steel shank
C	Carbide shank
E	Coolant through carbide shank
X	Special



K	125	U	350
M	150	V	400
Q	180	W	450
R	200	Y	500
S	250	X	Special
T	300		

### 4 Clamping system

Lever lock	Top clamp	Screw clamp	Multi lock	T-holder	Wedge clamp	Hook lever

### 5 Insert shape

C	D	E	H	K	R	S	T	V	W

### 6 Approach angle

L	K	U	Z	F	Q	P

### 7 Insert clearance angle

N	B
C	P

### 8 Hand of tool

R	
	Right hand *Left handed insert used
L	
	Left hand *Right handed insert used


### 9 Cutting edge length

See page A265		

### 10 Manufacturer's type designation

Unique to manufacturer

## Top clamp type boring bars

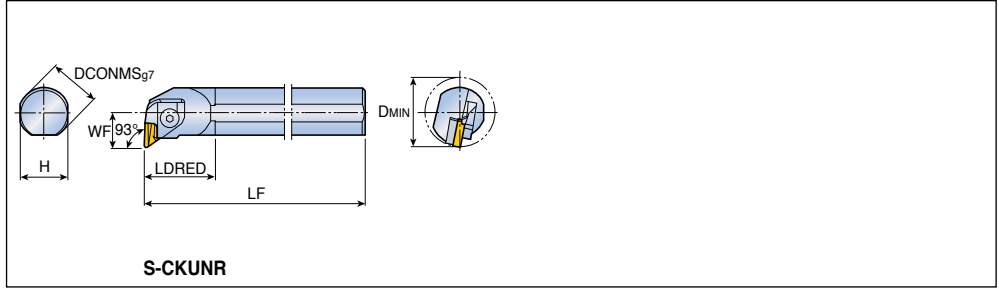


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S32T CKUNR/L 16</b>	32	30	300	45	22	44	KNUX 1604...R/L A282
	<b>S40T CKUNR/L 16</b>	40	37	300	55	27	54	
	<b>S40V CKUNR/L 16</b>	40	37	400	55	27	54	
	<b>S50U CKUNR/L 16</b>	50	47	350	60	35	67.2	

## Spare parts

Designation	Clamp	Screw	Clamp spring	Shim	Shim screw	Pin & spring	Wrench	
...16	CL 16KR/L	CLS 16K	KSP 90	CSK 1604R/L	FH M3x0.5 x10	KSP 48 KP 48S	L-W 4	

## Top clamp type boring bars

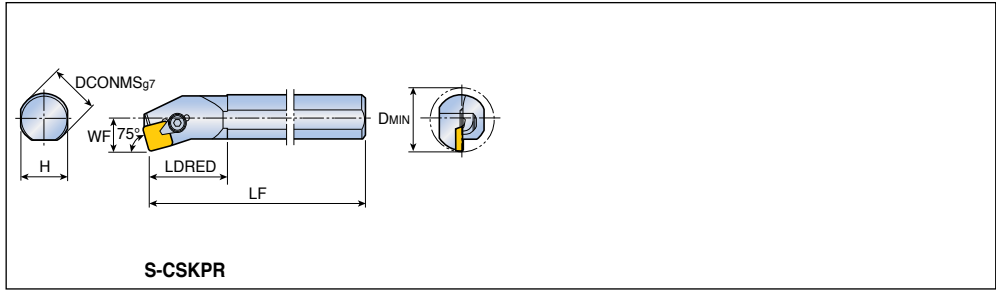


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>75°</b>	<b>S16R CSKPR/L09</b>	16	15	200	30	11	20	SPMR, SP...N 0903... SPMR, SP...N 1203... A322, A352
	<b>S20S CSKPR/L09</b>	20	18	250	32	13	25	
	<b>S20R CSKPR/L12</b>	20	18	200	34	13	25	
	<b>S25T CSKPR/L12</b>	25	23	300	42	17	32	
	<b>S32U CSKPR/L12</b>	32	30	350	45	22	40	

## Spare parts

Designation	Clamp		Screw	Snap ring	Shim	Shim pin	Wrench	
<b>...09</b>	CL 2C	-	CLS 2C	CSR 2C	-	-	L-W 2.5	
<b>S20R...12</b>	CL 3C	-	CLS 3C	CSR 2	CSS 42	CSP 3	L-W 3	
<b>S25T...12</b>	-	CL 3	CLS 3S	WSR 4	CSS 42	CSP 3	L-W 3	
<b>S32U...12</b>	-	CL 3	CLS 3	WSR 4	CSS 42	CSP 3	L-W 3	

## Top clamp type boring bars

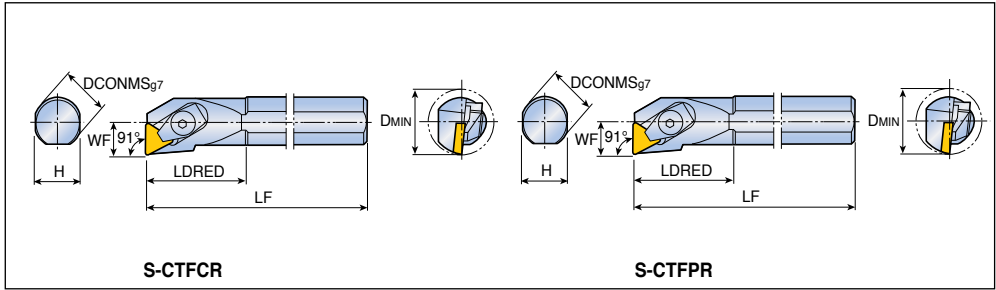


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	<b>S10K CTFCR/L 06</b>	10	9	125	25	6.5	12	TCGR 0601...
91°	<b>S10K CTFPR/L 06</b>	10	9	125	25	6.5	12	TP...R 0601...
	<b>S12M CTFPR/L 06</b>	12	11	150	30	9	16	TP...R, TP...N A327-A329, A363, A364
	<b>S12M CTFPR/L 09</b>	12	11	150	25	9	16	
	<b>S16R CTFPR/L 09</b>	16	15	200	25	11	20	
	<b>S12M CTFPR/L 11</b>	12	11	150	30	9	16	TP...R, TP...N
	<b>S16R CTFPR/L 11</b>	16	15	200	30	11	20	1103...
	<b>S20S CTFPR/L 11</b>	20	18	250	35	13	25	TP...R, TP...N 1603...
	<b>S16R CTFPR/L 16</b>	16	15	200	40	11	20	
	<b>S20S CTFPR/L 16</b>	20	18	250	50	13	25	
	<b>S25T CTFPR/L 16</b>	25	23	300	40	17	32	
	<b>S32T CTFPR/L 16</b>	32	30	300	45	22	40	
	<b>S40T CTFPR/L 16</b>	40	37	300	41.5	27	50	
	<b>S50U CTFPR/L 16</b>	50	47	350	56	35	63	
	<b>S40T CTFPR/L 22</b>	40	37	300	41.5	27	50	TPMR, TP...N
	<b>S50U CTFPR/L 22</b>	50	47	350	56	35	63	2204...

## Spare parts

Designation	Clamp			Screw	Snap ring	Shim	Shim pin	Wrench
...06	CL 1.25	-	-	CLS 1.25	CSR 1.25	-	-	L-W 1.5
...09	CL 1.25	-	-	CLS 1.25	CSR 1.25	-	-	L-W 1.5
...11	-	CL 2C	-	CLS 2C	CSR 2C	-	-	L-W 2.5
<b>S16R...16</b>	-	CL 3C	-	CLS 3C	CSR 2	-	-	L-W 3
<b>S20S...16</b>	-	CL 3C	-	CLS 3C	CSR 2	-	-	L-W 3
<b>S25T...16</b>	-	-	CL 3	CLS 3S	WSR 4	-	-	L-W 3
...16	-	-	CL 3	CLS 3	WSR 4	CST 32	CSP 3	L-W 3
...22	-	-	CL 4	CLS 4	CSR 4	CST 43	CSP 16K	L-W 4

## Hook lever type boring bars

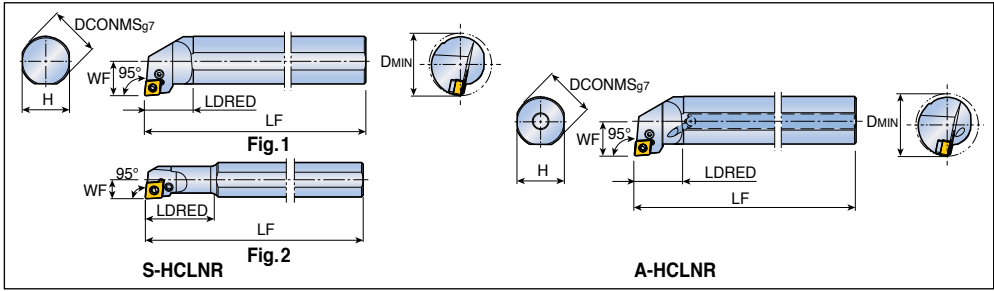

Approach angle	Designation	Dimension (mm)						Fig.	Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
 95°	<b>S16Q HCLNR/L 0904</b>	16	15	180	25	11	20	1	CN... 0904...  A266, A268-A273
	<b>S20Q HCLNR/L 0904</b>	20	18	180	28	13	25	1	
	<b>S20Q HCLNR/L 0904-D20</b>	20	18	180	40	11	20	2	
	<b>S25R HCLNR/L 0904</b>	25	23	200	31	17	32	1	
	<b>S32S HCLNR/L 0904</b>	32	30	250	31	22	40	1	
	<b>S40T HCLNR/L 0904</b>	40	37	300	55	27	50	1	
 95°	<b>A16Q HCLNR/L 0904</b>	16	15	180	25	11	20	CN... 0904... 	
	<b>A20Q HCLNR/L 0904</b>	20	18	180	28	13	25		
	<b>A25R HCLNR/L 0904</b>	25	23	200	31	17	32		
	<b>A32S HCLNR/L 0904</b>	32	30	250	31	22	40		


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>S ...0904</b>	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
<b>S ...0904...D</b>	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
<b>S32S...0904</b>	LCL 09-NX	LCS 3	LSC 32	LSP 3A	-	L-W 2.5		
<b>S40T ...0904</b>	LCL 09-NX	LCS 3	LSC 32	LSP 3A	-	L-W 2.5		
<b>A ...0904</b>	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
<b>A32S...0904</b>	LCL 09-NX	LCS 3	LSC 32	LSP 3A	-	L-W 2.5		

# S-HDQNR/L



## Hook lever type boring bars

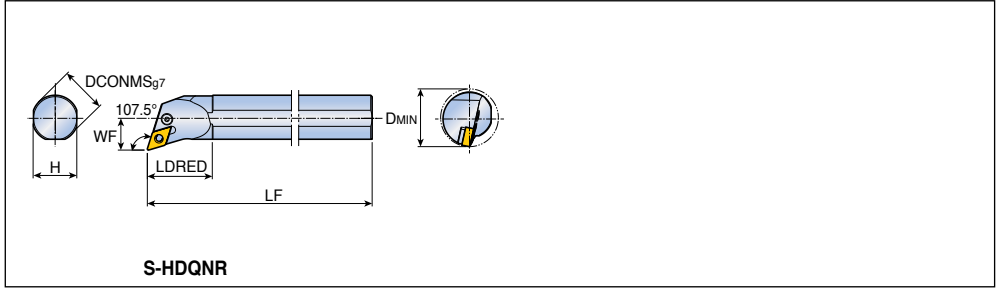

Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
107.5°	<b>S32S HDQNR/L1305</b>	32	30	250	45	22	40	DN... 1305... RHINO TURN A276-A281	


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench		
...1305	LCL 11-NX	LSC 4S	LSD 3.52B	LSP 4	L-W 3		

# S-HDUNR/L A-HDUNR/L



## Hook lever type boring bars

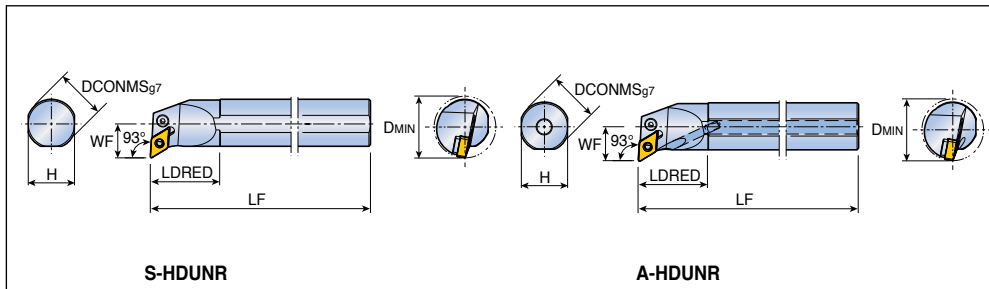

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S32S HDUNR/L1305</b>	32	30	250	45	22	40	DN... 1305... RHINO TURN A276-A281
	<b>S40T HDUNR/L1305</b>	40	37	300	55	27	50	
93°	<b>A32S HDUNR/L1305</b>	32	30	250	45	22	40	
	<b>A40T HDUNR/L1305</b>	40	37	300	55	27	50	


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
...1305	LCL 11-NX	LCS 4S	LSD 3.52B	LSP 4	L-W 3			

# S-HDZNR/L A-HDZNR/L



## Hook lever type boring bars

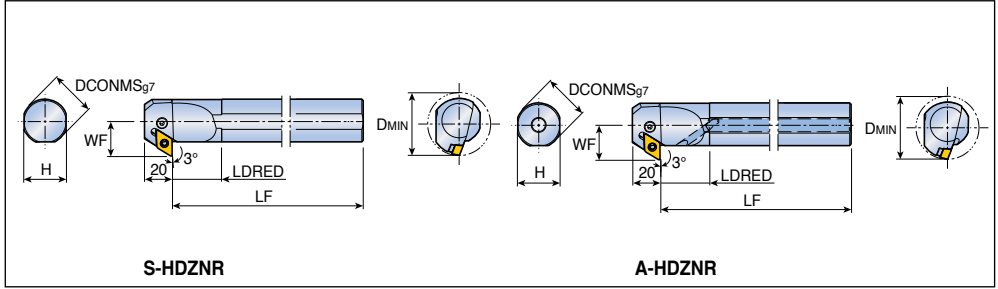


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S32S HDZNR/L1305</b>	32	30	250	35	25	45	DN... 1305... RHINO TURN A276-A281
	<b>S40T HDZNR/L1305</b>	40	37	300	40	29	50	
93°	<b>A32S HDZNR/L1305</b>	32	30	250	35	25	45	
	<b>A40T HDZNR/L1305</b>	40	37	300	40	29	50	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
...1305	LCL 11-NX	LCS 4S	LSD 3.52B	LSP 4	L-W 3			

## Hook lever type boring bars

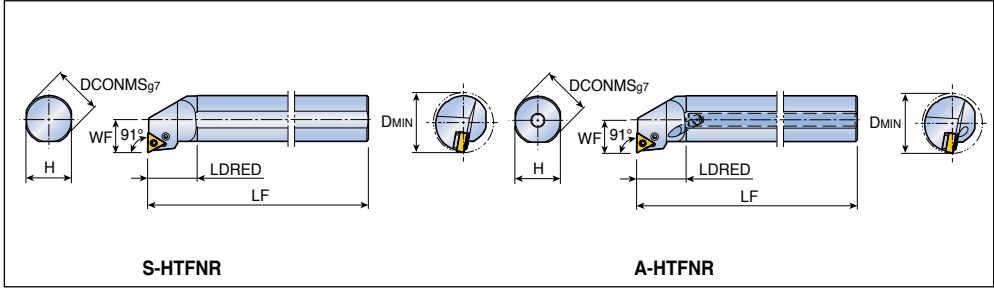

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	<b>S16Q HTFNR/L 1304</b>	16	15	180	25	11	20	TN... 1304... A291-A296
	<b>S20Q HTFNR/L 1304</b>	20	18	180	28	13	25	
	<b>S25R HTFNR/L 1304</b>	25	23	200	33	17	32	
	<b>S32S HTFNR/L 1304</b>	32	30	250	33	22	40	
91°	<b>A16Q HTFNR/L 1304</b>	16	15	180	25	11	20	
	<b>A20Q HTFNR/L 1304</b>	20	18	180	28	13	25	
	<b>A25R HTFNR/L 1304</b>	25	23	200	33	17	32	
	<b>A32S HTFNR/L 1304</b>	32	30	250	33	22	40	


## Spare parts




Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>...1304</b>								
<b>LCL 08B-NX</b>	LCL 08B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
<b>...32S...1304</b>	LCL 08-NX	LCS 3-NX	LST 2.51.8B	LSP 3B	-	L-W 2.5		

# S-HTUNR/L A-HTUNR/L



## Hook lever type boring bars

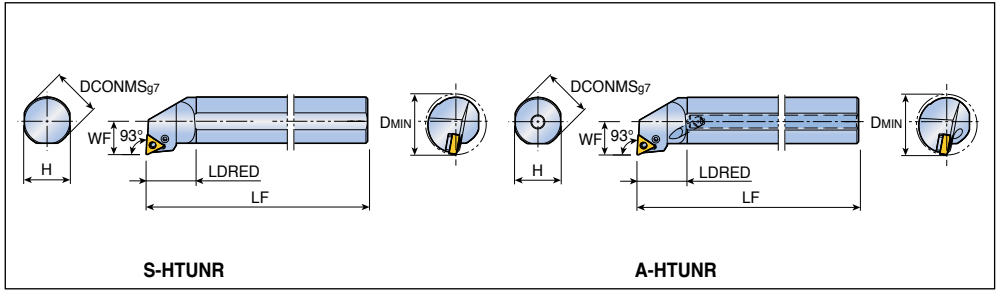

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
 93°	<b>S16Q HTUNR/L 1304</b>	16	15	180	25	11	20	TN... 1304...  A291-A296
	<b>S20Q HTUNR/L 1304</b>	20	18	180	28	13	25	
	<b>S25R HTUNR/L 1304</b>	25	23	200	33	17	32	
	<b>S32S HTUNR/L 1304</b>	32	30	250	33	22	40	
 93°	<b>A16Q HTUNR/L 1304</b>	16	15	180	25	11	20	
	<b>A20Q HTUNR/L 1304</b>	20	18	180	28	13	25	
	<b>A25R HTUNR/L 1304</b>	25	23	200	33	17	32	
	<b>A32S HTUNR/L 1304</b>	32	30	250	33	22	40	


## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
...1304	LCL 08B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
...32S...1304	LCL 08-NX	LCS 3-NX	LST 2.51.8B	LSP 3B	-	L-W 2.5		

# S-HWLN/L A-HWLN/L



## Hook lever type boring bars

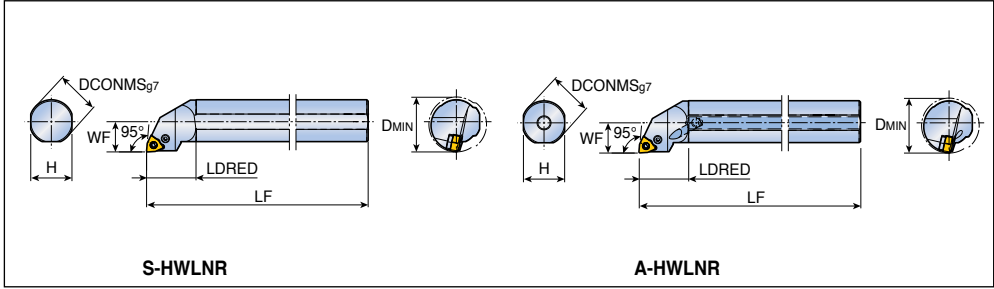


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>S16Q HWLN/L 0604</b>	16	15	180	30	11	20	WN...X 0604... A303, A304
	<b>S20Q HWLN/L 0604</b>	20	18	180	33	13	25	
	<b>S25R HWLN/L 0604</b>	25	23	200	36	17	32	
	<b>S32S HWLN/L 0604</b>	32	30	250	36	22	40	
95°	<b>A16Q HWLN/L 0604</b>	16	15	180	30	11	20	
	<b>A20Q HWLN/L 0604</b>	20	18	180	33	13	25	
	<b>A25R HWLN/L 0604</b>	25	23	200	36	17	32	
	<b>A32S HWLN/L 0604</b>	32	30	250	36	22	40	

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>...0604</b>	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2		
<b>...32S ...0604</b>	LCL 09-NX	LCS 3	LSW 32	LSP 3A	-	L-W 2.5		

## Hook lever type boring bars

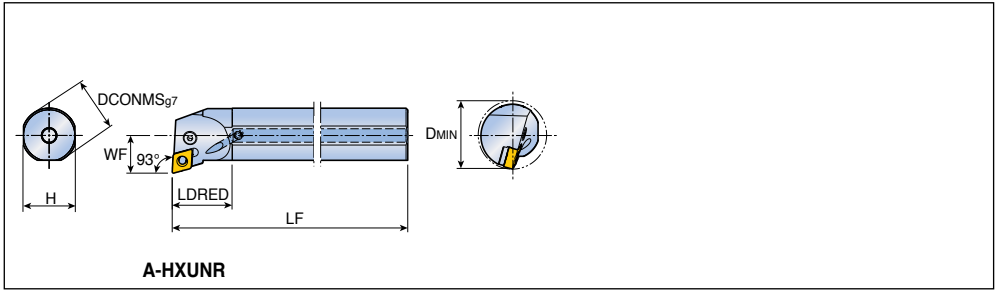


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>93°</b>	<b>A32S HXUNR/L 1105</b>	32	30	250	35	22	40	XN... 1105...
								   <b>A305, A306</b>

## Spare parts

Designation	Lever	Lever screw	Shim	Shim pin	Wrench			
<b>...1105</b>	LCL 11-NX	LCS 4S	LSX 3.52B	LSP 4	L-W 3			

## Multi lock type boring bars

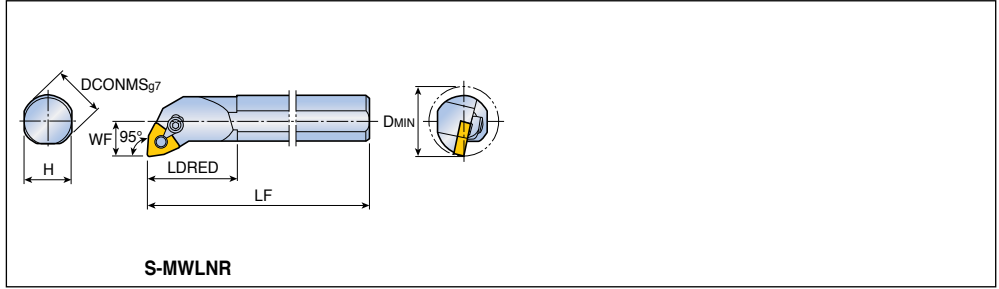


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>S25R MWLN/L 08</b>	25	23	200	42	17	32	WN... 0804...  A300-A303, A350, A359
	<b>S32S MWLN/L 08</b>	32	30	250	45	22	40	

## Spare parts

Designation	Clamp	Screw	Snap ring	Lock pin	Wrench			
<b>...08</b>	CL 2	CLS 2	CSR 2	MLP 4S	L-W 2.5			

## Lever lock type boring bars

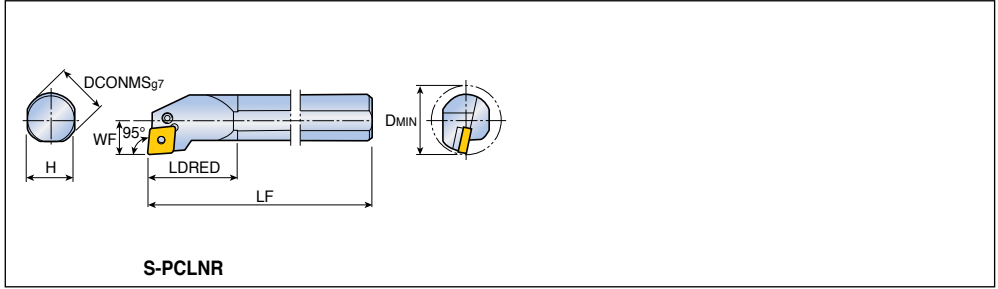


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>S25T PCLNR/L12</b>	25	23	300	40	17	32	CN...1204... A266, A268-A273, A275, A341, A342, A353
	<b>S32T PCLNR/L12</b>	32	30	300	45	22	40	
	<b>S40T PCLNR/L12</b>	40	37	300	55	27	50	
	<b>S50U PCLNR/L12</b>	50	47	350	70	35	63	CN...1606... CN...1906...
	<b>S50U PCLNR/L16</b>	50	47	350	70	35	63	
	<b>S50U PCLNR/L19</b>	50	47	350	70	35	63	




## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>S25T...12</b>	LCL 4B	LCS 4B	-	-	LSR 4B	L-W 2.5		
<b>S32 ...12</b>	LCL 4	LCS 4S	LSC 42	LSP 4	-	L-W 3		
<b>...12</b>	LCL 4	LCS 4	LSC 42	LSP 4	-	L-W 3		
<b>...16</b>	LCL 5	LCS 5	LSC 53	LSP 5	-	L-W 3		
<b>...19</b>	LCL 6D	LCS 6	LSC 63	LSP 6	-	L-W 4		



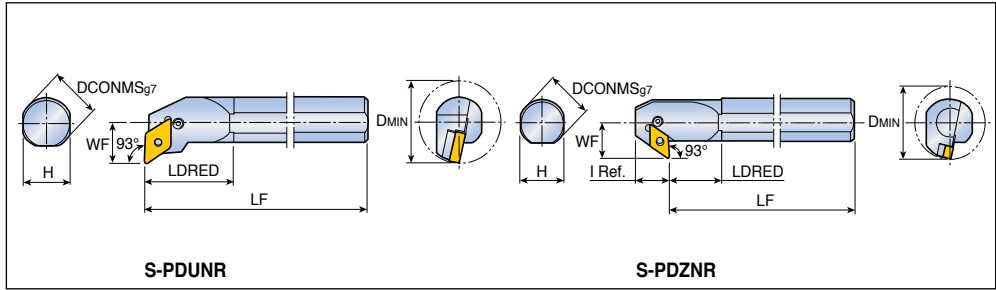


# S-PDUNR/L S-PDZNR/L

## Lever lock type boring bars




Approach angle	Designation	Dimension (mm)							Insert	
		DCONMS	H	LF	LDRED	WF	I	DMIN		
<b>93°</b> 	<b>S32T PDUNR/L 15</b>	32	30	300	45	22	-	40	DN...1506...  A276-A281, A343, A354	
	<b>S40T PDUNR/L 15</b>	40	37	300	55	27	-	50		
	<b>S50U PDUNR/L 15</b>	50	47	350	70	35	-	63		
	<b>S32T PDUNR/L 15-A</b>	32	30	300	35	22	-	40		
										DN...1504...
<b>93°</b>  For back boring	<b>S32T PDZNR/L 15</b>	32	30	300	30	25	26	45	DN...1506...	
	<b>S40T PDZNR/L 15</b>	40	37	300	35	29	26	50		
	<b>S50U PDZNR/L 15</b>	50	47	350	45	35	27	63		

## Spare parts

Designation	Lever	Screw	Shim	Shim pin	Wrench			
								
<b>S32T ...15</b>	LCL 4A	LCS 4S	LSD 42	LSP 4	L-W 3			
<b>S40T PDZ ...15</b>	LCL 4A	LCS 4S	LSD 42	LSP 4	L-W 3			
<b>...15</b>	LCL 4A	LCS 4	LSD 42	LSP 4	L-W 3			
<b>...15-A</b>	LCL 4A	LCS 4S	LSD 42	LSP 4	L-W 3			

## Lever lock type boring bars

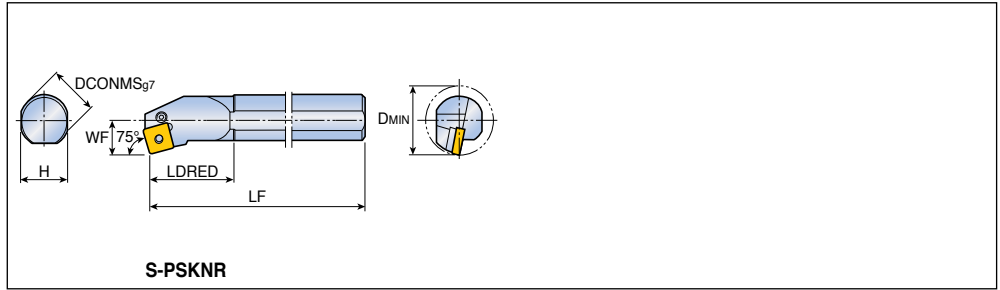


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>75°</b>	<b>S25T PSKNR/L 12</b>	25	23	300	33	17	32	SN...1204... A284-A290, A346, A347, A356
	<b>S32T PSKNR/L 12</b>	32	30	300	45	22	40	
	<b>S40T PSKNR/L 12</b>	40	37	300	41.5	27	50	
	<b>S50U PSKNR/L 19</b>	50	47	350	56	35	63	

### Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>S25T...12</b>	LCL 4B	LCS 4B	-	-	LSR 4B	L-W 2.5		
<b>S32T...12</b>	LCL 4	LCS 4S	LSS 42	LSP 4	-	L-W 3		
<b>S40T...12</b>	LCL 4	LCS 4	LSS 42	LSP 4	-	L-W 3		
<b>...19</b>	LCL 6D	LCS 6	LSS 63	LSP 6	-	L-W 4		

## Lever lock type boring bars

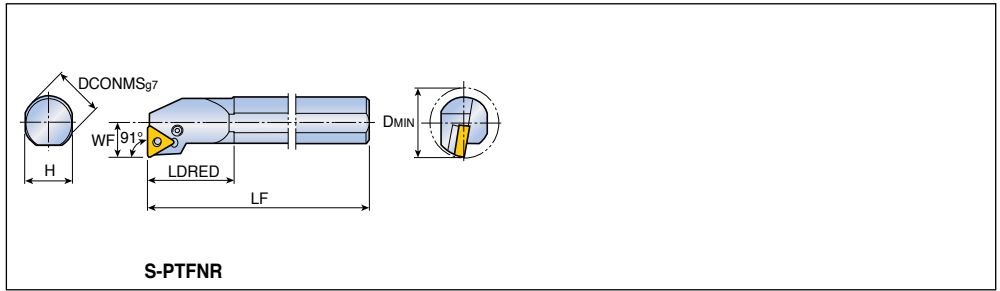


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>91°</b>	<b>S20Q PTFNR/L11</b>	20	18	180	40	13	25	TN... 1103...
	<b>S25T PTFNR/L16</b>	25	23	300	40	17	32	TN... 1604... A291-A296, A349, A357
	<b>S32T PTFNR/L16</b>	32	30	300	45	22	40	
	<b>S40T PTFNR/L16</b>	40	37	300	60	27	50	
	<b>S50U PTFNR/L16</b>	50	47	350	56	35	63	
	<b>S40T PTFNR/L22</b>	40	37	300	56	27	50	TN... 2204...
	<b>S50U PTFNR/L22</b>	50	47	350	56	35	63	

### Spare parts

Designation	Lever	Screw	Shim	Shim pin	Snap ring	Wrench		
<b>...11</b>			-	-				
<b>S25T ...16</b>			-	-				
<b>...16</b>					-			
<b>... 22</b>					-			

## Screw type boring bars

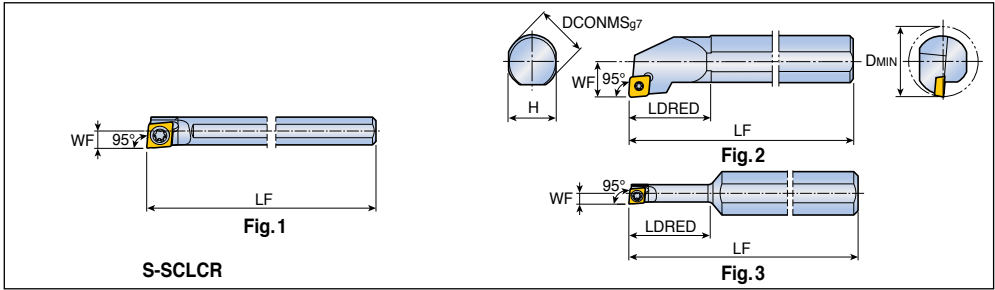


Approach angle	Designation	Dimension (mm)							Fig.	Insert
		DCONMS	H	LF	LDRED	WF	DMIN			
 95°	<b>S04F SCLCR/L 03-D05</b>	4	3.75	80	-	2.5	5	1	CC...T 0301... A309-A312, A360	
	<b>S05G SCLCR/L 03-D06</b>	5	4.75	90	-	3	6	1		
	<b>S10H SCLCR/L 03-D05</b>	10	9	100	15	2.5	5	3		
	<b>S06H SCLCR/L 04-D07</b>	6	5.5	100	-	3.5	7	1	CC...T 0401...	
	<b>S07J SCLCR/L 04-D08</b>	7	6.5	110	-	4	8	1		
	<b>S08K SCLCR/L 06</b>	8	7	125	18	6	11	2	CC... 0602...	
	<b>S10K SCLCR/L 06</b>	10	9	125	20	7	13	2		
	<b>S12M SCLCR/L 06</b>	12	11	150	25	9	16	2		
	<b>S16R SCLCR/L 06</b>	16	15	200	30	11	20	2		
	<b>S12M SCLCR/L 09</b>	12	11	150	23	9	16	2	CC... 09T3...	
	<b>S16R SCLCR/L 09</b>	16	15	200	30	11	20	2		
	<b>S20S SCLCR/L 09</b>	20	18	250	32	13	25	2		
	<b>S25T SCLCR/L 12</b>	25	23	300	42	17	32	2	CC... 1204...	
	<b>S32T SCLCR/L 12</b>	32	30	300	45	22	40	2		
	<b>S40T SCLCR/L 12</b>	40	37	300	55	27	50	2		

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
<b>...03</b>	TS 160311	-	-	T 6	-		
<b>...04</b>	TS 200381/HG-P	-	-	T 6P	-		
<b>S...K ...06</b>	SO 25050I	-	-	T 7	-		
<b>...06</b>	SO 25065I	-	-	T 7	-		
<b>...09</b>	SO 35080I	-	-	T 15	-		
<b>S25T...12</b>	SO 45100I	-	-	T 20	-		
<b>...12</b>	SO 45130I	SSC 43N	SO 60105S	T 20	L-W 5		

## Screw type boring bars

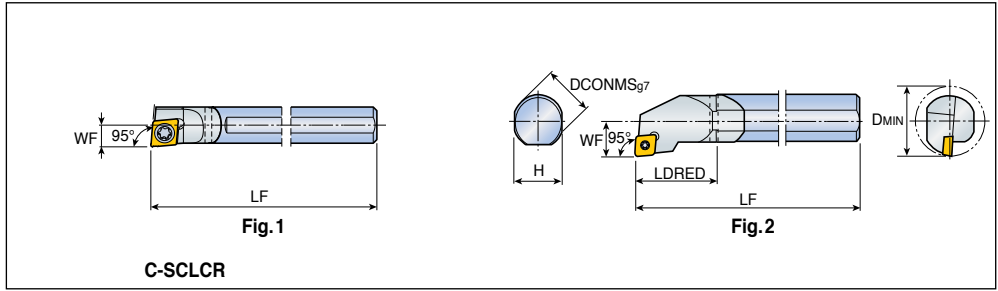

Approach angle	Designation	Dimension (mm)							Fig.	Insert
		DCONMS	H	LF	LDRED	WF	DMIN			
95°	✓ C04G SCLCR/L 03-D05	4	3.75	90	-	2.5	5	1	CC...T 0301...	
	✓ C05H SCLCR/L 03-D06	5	4.75	100	-	3	6	1	A309-A312,	
	✓ C06J SCLCR/L 04-D07	6	5.5	110	-	3.5	7	1	CC...T 0401... A360	
	✓ C07K SCLCR/L 04-D08	7	6.5	125	-	4	8	1		
	✓ C08K SCLCR/L 06	8	7	125	15	6	11	2	CC... 0602...	
	✓ C10K SCLCR/L 06	10	9	125	15	7	13	2		
	✓ C12M SCLCR/L 06	12	11	150	18	9	16	2		
	✓ C12M SCLCR/L 09	12	11	150	18	9	16	2	CC... 09T3...	
	✓ C16R SCLCR/L 09	16	15	200	25	11	20	2		
	✓ C20S SCLCR/L 09	20	18	250	25	13	25	2		

• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts






Designation	Screw	Wrench				
...03	TS 16031I	T 6				
...04	TS 20038I/HG-P	T 6P				
C08/C10...06	SO 25050I	T 7				
C12 ...06	SO 25065I	T 7				
...09	SO 35080I	T 15				

# S-SCLNR/L A-SCLNR/L



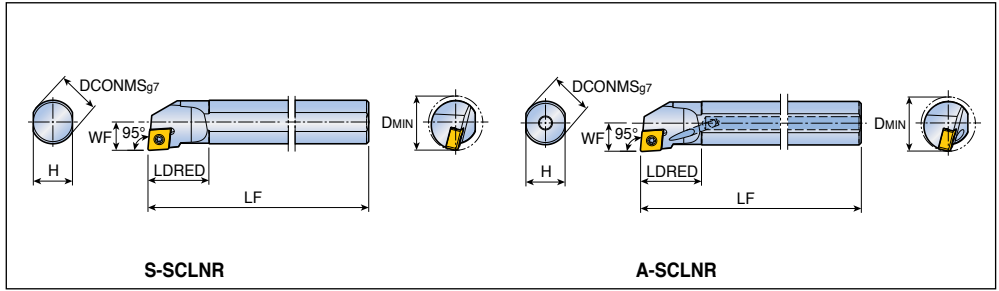

## Screw type boring bars






Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
 95°	<b>S16Q SCLNR/L 0904</b>	16	15	180	25	11	20	CN... 0904...  A266, A268-A273
	<b>S20Q SCLNR/L 0904</b>	20	18	180	28	13	25	
	<b>S20Q SCLNR/L 0904-D20</b>	20	18	180	40	11	20	
 95°	<b>A12M SCLNR/L 0703</b>	12	11	150	21.5	9	16	CNMX 0703...  A275
	<b>A16Q SCLNR/L 0703</b>	16	15	180	24.5	11	20	
	<b>A16Q SCLNR/L 0904</b>	16	15	180	25	11	20	CN... 0904...  A266, A268-A273
	<b>A20Q SCLNR/L 0904</b>	20	18	180	28	13	25	

## Spare parts

Designation	Screw	Wrench				
	...0703	 TS 25D060/HG-P	 T 7P			
...0904	TS 350831/HG	T 10				

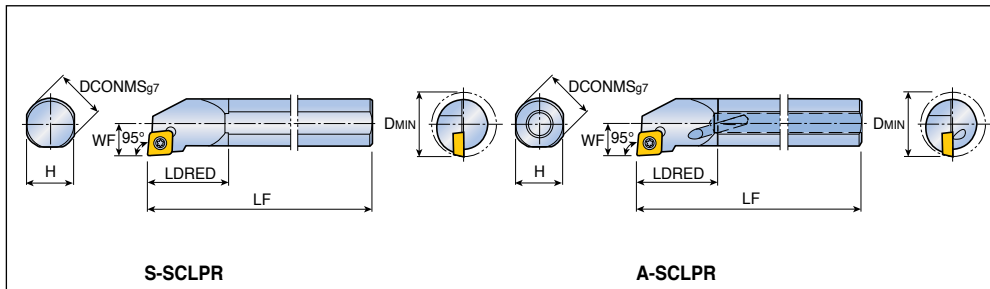

## Screw type boring bars



Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
 95°	<b>S10K SCLPR/L 08</b>	10	9	125	20	6	12	CP...T 0802... CP...T 0903... A313
	<b>S12M SCLPR/L 08</b>	12	11	150	23	8	16	
	<b>S16R SCLPR/L 09</b>	16	15	200	30	10	20	
	<b>S20S SCLPR/L 09</b>	20	18	250	32	12.5	25	
 95°	<b>A08H SCLPR/L 06</b>	8	7	100	15	6	11	CP...T 0602...
	<b>A10K SCLPR/L 06</b>	10	9	125	15	7	13	
	<b>A12M SCLPR/L 0903</b>	12	11	150	19	9	16	CP...T 0903...
	<b>A16Q SCLPR/L 0903</b>	16	15	180	20	11	20	
	<b>A20R SCLPR/L 0903</b>	20	18	200	22	13	25	
	<b>A12M SCLPR/L 09T3</b>	12	11	150	19	9	16	CP...T 09T3...
	<b>A16Q SCLPR/L 09T3</b>	16	15	180	24.5	11	20	
	<b>A20R SCLPR/L 09T3</b>	20	18	200	22	13	25	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts



Designation	Screw	Wrench					
							
<b>...06</b>	SO 25050I	T 7					
<b>...08</b>	SO 30055I	T 9					
<b>...09</b>	SO 35080I	T 15					
<b>...0903, 09T3</b>	TS 35070I/HG	T 15					

# E-SCLPR/L A-SDLNR/L





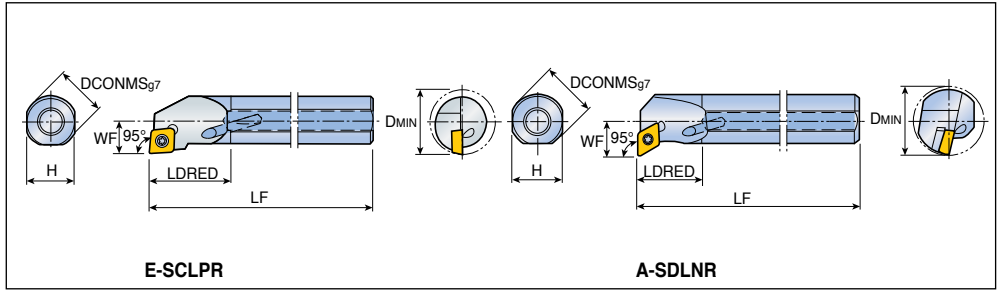

## Screw type boring bars



Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>95°</b> 	✓ <b>E08K SCLPR/L 06</b>	8	7	125	15	6	11	CP...T 0602... A313
	✓ <b>E10K SCLPR/L 06</b>	10	9	125	15	7	13	
	✓ <b>E12M SCLPR/L 0903</b>	12	11	150	19	9	16	CP...T 0903...
	✓ <b>E16R SCLPR/L 0903</b>	16	15	200	22	11	20	
	✓ <b>E12M SCLPR/L 09T3</b>	12	11	150	19	9	16	CP...T 09T3...
	✓ <b>E16R SCLPR/L 09T3</b>	16	15	200	22	11	20	
<b>95°</b> 	<b>A20S SDLNR/L 11</b>	20	18	250	28	13	24	DN...1104... A276-A278, A280
	<b>A25T SDLNR/L 11</b>	25	23	300	42	17	31	


• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder





## Spare parts

Designation	Screw	Shim	Shim screw	Wrench		Seal		
...06	SO 25050I	-	-		T 7	-	-	
...09	TS 35070I/HG	-	-		T 15	-	-	
<b>A20S...11</b>	SO 35120I	-	-		T 10	-	PL 20	
<b>A25T...11</b>	SO 35120I	SSD 32	SO 50090S		T 10	L-W 3.5	PL 25	

# S-SDQCR/L A-SDQNR/L



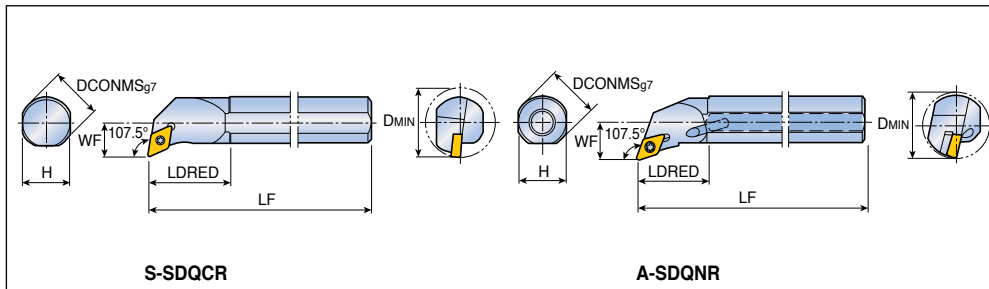



## Screw type boring bars




Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
107.5° 	<b>S10K SDQCR/L 07</b>	10	9	125	20	7	13	DC... 0702...  A314-A317, A361
	<b>S12M SDQCR/L 07</b>	12	11	150	22	9	16	
	<b>S16R SDQCR/L 07</b>	16	15	200	27	11	20	
	<b>S20S SDQCR/L 11</b>	20	18	250	40	13	25	
	<b>S25T SDQCR/L 11</b>	25	23	300	50	17	32	
107.5° 	<b>A16S SDQNR/L 11</b>	16	15	250	30	13	23	DN... 1104...  A276-A278, A280
	<b>A20S SDQNR/L 11</b>	20	18	250	31	15	27	
	<b>A25T SDQNR/L 11</b>	25	23	300	35	19	33	
	<b>A32T SDQNR/L 11</b>	32	30	300	44	26	44	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench		Seal		
								
<b>S10 ...07</b>	SO 25050I	-	-	T 7	-	-		
<b>S ...07</b>	SO 25065I	-	-	T 7	-	-		
<b>S ...11</b>	SO 35080I	-	-	T 15	-	-		
<b>A16S...11</b>	SO 35120I	-	-	T 10	-	PL 16		
<b>A20S...11</b>	SO 35120I	SSD 32	SO 50090S	T 10	L-W 3.5	PL 20		
<b>A25T...11</b>	SO 35120I	SSD 32	SO 50090S	T 10	L-W 3.5	PL 25		
<b>A32T...11</b>	SO 35120I	SSD 32	SO 50090S	T 10	L-W 3.5	PL 32		

## Screw type boring bars

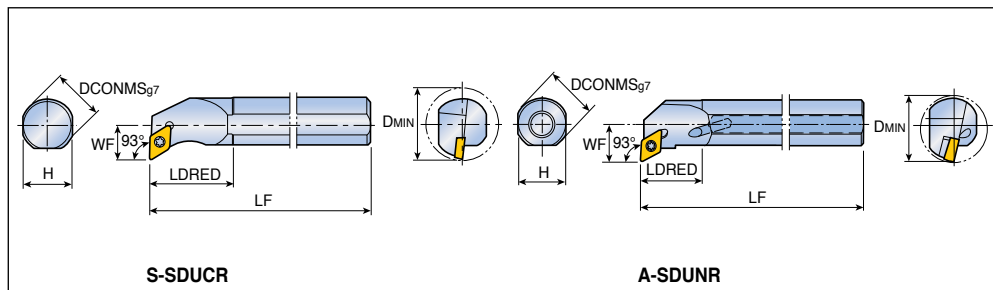


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>93°</b> 	<b>S10K SDUCR/L 07</b>	10	9	125	20	7	13	DC... 0702... A314-A317, A361
	<b>S12M SDUCR/L 07</b>	12	11	150	23	9	16	
	<b>S16R SDUCR/L 07</b>	16	15	200	30	11	20	DC... 11T3... A276, A277, A280
	<b>S16R SDUCR/L 11</b>	16	15	200	27	11	20	
	<b>S20S SDUCR/L 11</b>	20	18	250	32	13	25	
	<b>S25T SDUCR/L 11</b>	25	23	300	42	17	32	
	<b>S32T SDUCR/L 11</b>	32	30	300	55	22	40	
<b>93°</b> 	<b>A12M SDUNR/L 0803</b>	12	11	150	21.5	9	16	DN...X 0803... RHINO TURN A281
	<b>A16Q SDUNR/L 0803</b>	16	15	180	24.5	11	20	
	<b>A20S SDUNR/L 11</b>	20	18	250	30	15	27	DN... 1104... A276, A277, A280
	<b>A25T SDUNR/L 11</b>	25	23	300	30	19	33	
	<b>A32T SDUNR/L 11</b>	32	30	300	44	26	44	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench		Seal		
<b>S ...07</b>	SO 250651	-	-	T 7	-	-		
<b>S ...11</b>	SO 350801	-	-	T 15	-	-		
<b>A20S...11</b>	SO 351201	-	-	T 10	-	PL 20		
<b>A25T ...11</b>	SO 351201	SSD 32	SO 50090S	T 10	L-W 3.5	PL 25		
<b>A32T ...11</b>	SO 351201	SSD 32	SO 50090S	T 10	L-W 3.5	PL 32		
<b>...0803</b>	TS 25D060/HG-P	-	-	T 7P	-	-		

## Screw type back boring bars

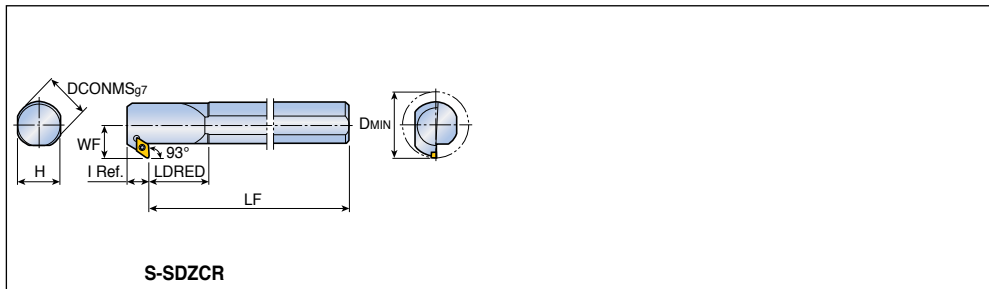


Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	LDRED	WF	I	DMIN	
93°	<b>S16R SDZCR/L 07</b>	16	15	200	23	13	12	22	DC... 0702... A314-A317, A361
	<b>S20S SDZCR/L 07</b>	20	18	250	28	15	12	30	
	<b>S25T SDZCR/L 07</b>	25	23	300	33	18	12	33	
	<b>S20S SDZCR/L 11</b>	20	18	250	24	15	16	27	
	<b>S32T SDZCR/L 11</b>	32	30	300	34	22	16	40	
For back boring									DC... 11T3...

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
<b>...07</b>	SO 25065I	-	-	T 7	-			
<b>S20S...11</b>	SO 35080I	-	-	T 15	-			
<b>S32T...11</b>	SO 35124I	SSD 32	SO 50090S	T 15	L-W 3.5			

## Screw type boring bars

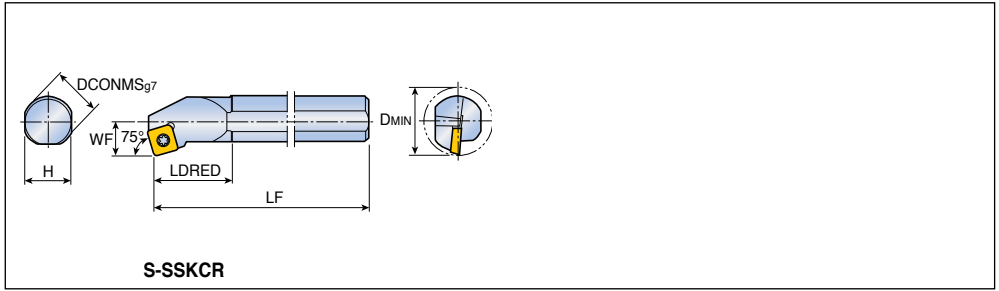

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
75°	<b>S16R SSKCR/L 09</b>	16	15	200	24.5	11	20	SC... 09T3... <b>A321, A362</b>
	<b>S20S SSKCR/L 09</b>	20	18	250	30	13	25	
	<b>S25T SSKCR/L 12</b>	25	23	300	33.4	17	32	SC... 1204... <b>A321</b>


## Spare parts



Designation	Screw	Wrench						
...09	SO 35080I	T 15						
...12	SO 45100I	T 20						

# S-STFCR/L C-STFCR/L



## Screw type boring bars

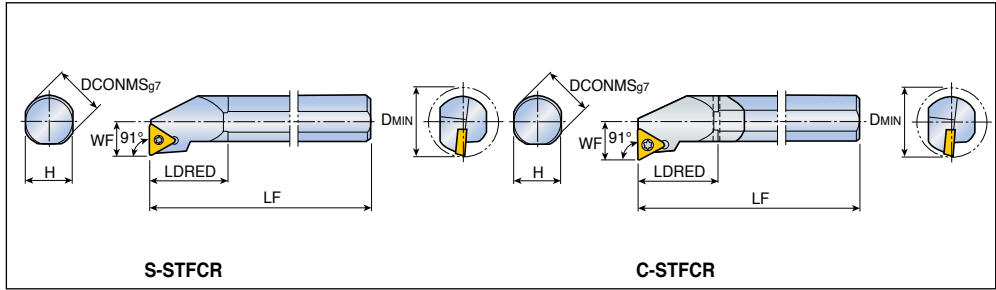

Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
91° 	<b>S06H STFCR/L 06T1</b>	6	5.4	100	12	4.5	8	TC...T 06T1...	
	<b>S08K STFCR/L 09</b>	8	7	125	20	6	11	TC... 0902... A324, A325, A363, A364	
	<b>S10K STFCR/L 09</b>	10	9	125	22.5	7	13		
	<b>S12M STFCR/L 09</b>	12	11	150	30	9	16		
	<b>S16R STFCR/L 09</b>	16	15	200	35	11	20		
	<b>S12M STFCR/L 11</b>	12	11	150	25	9	16	TC... 1102...	
	<b>S16R STFCR/L 11</b>	16	15	200	35	11	20		
	<b>S20S STFCR/L 11</b>	20	18	250	36	13	25		
	<b>S20S STFCR/L 16</b>	20	18	250	36	13	25	TC... 16T3...	
	<b>S25T STFCR/L 16</b>	25	23	300	49	17	32		
	<b>S32T STFCR/L 16</b>	32	30	300	45	22	40		
	<b>S40T STFCR/L 16</b>	40	37	300	60	27	50		
91° 	✓ <b>C10K STFCR/L 09</b>	10	9	125	15	7	13	TC... 0902...	
	✓ <b>C10K STFCR/L 11</b>	10	9	125	15	7	13	TC... 1102...	
	✓ <b>C12M STFCR/L 11</b>	12	11	150	20	9	16		
	✓ <b>C16R STFCR/L 11</b>	16	15	200	25	11	20		

• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
<b>...06T1</b>	TS 20038I	-	-	T 6	-			
<b>S08K...09</b>	TS 22046I	-	-	T 7	-			
<b>...09</b>	SO 22050I	-	-	T 7	-			
<b>...11</b>	SO 25065I	-	-	T 7	-			
<b>C10K...11</b>	SO 25050I	-	-	T 7	-			
<b>S20S...16</b>	SO 35080I	-	-	T 15	-			
<b>S25T...16</b>	SO 35080I	-	-	T 15	-			
<b>S32T...16</b>	SO 35124I	SST 32	SO 50090S	T 15	L-W 3.5			
<b>S40T...16</b>	SO 35124I	SST 32	SO 50090S	T 15	L-W 3.5			

# S-STFNR/L A-STFNR/L



## Screw type boring bars

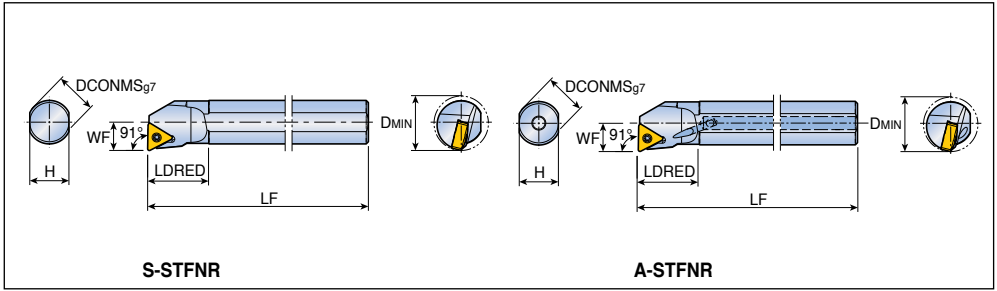


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	<b>S16Q STFNR/L 1304</b>	16	15	180	25	11	20	TN... 1304... RHINO TURN A291-A296
	<b>S20Q STFNR/L 1304</b>	20	18	180	28	13	25	
91°	<b>A16Q STFNR/L 1304</b>	16	15	180	25	11	20	
	<b>A20Q STFNR/L 1304</b>	20	18	180	28	13	25	

## Spare parts

Designation	Screw	Wrench					
...1304	TS 30080/HG	T 9					

# S-STFPR/L A-STFPR/L

## Screw type boring bars

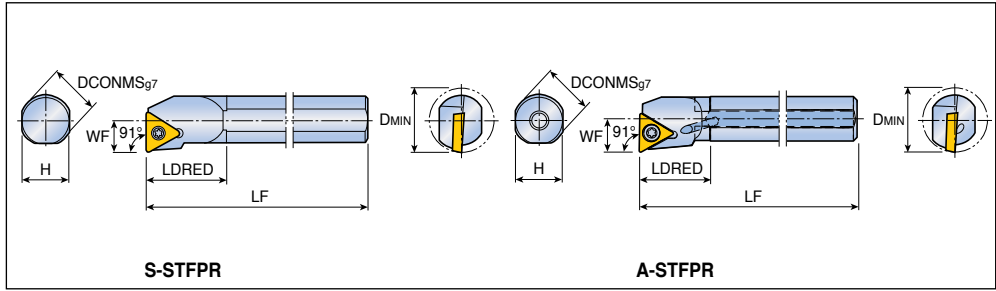

Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
 91°	<b>S08K STFPR/L 09-X01</b>	8	7	125	15	6	11	TPGX 0902...	
	<b>S08K STFPR/L 09</b>	8	7	125	14	6	11	TP...T 0902...	
	<b>S10K STFPR/L 11</b>	10	9	125	25	6	12	TP...T 1103... <b>A326-A328, A363</b>	
	<b>S12M STFPR/L 11</b>	12	11	150	30	8	16		
	<b>S16R STFPR/L 11</b>	16	15	200	35	10	20		
	<b>S16N STFPR/L 16</b>	16	15	160	30	10	20	TP...T 1604...	
	<b>S20S STFPR/L 16</b>	20	18	250	36	12.5	25	TPMT 1103...	
 91°	<b>A08H STFPR/L 09</b>	8	7	100	16.7	6	11	TP...T 0902...	
	<b>A10K STFPR/L 1102</b>	10	9	125	16.4	7	13	TP...T 1102...	
	<b>A12M STFPR/L 1102</b>	12	11	150	19	9	16		
	<b>A16Q STFPR/L 1102</b>	16	15	180	20	11	20		
	<b>A12M STFPR/L 1103</b>	12	11	150	19	9	16	TP...T 1103...	
	<b>A16Q STFPR/L 1103</b>	16	15	180	20.5	11	20	TP...T 1103...	
	<b>A20R STFPR/L 16T3</b>	20	18	200	26	13	25	TP...T 16T3...	

- TPGX type inserts are available with alternate screw. (TPGX 1103 → SO 300811)
- L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Wrench				
<b>...09-X01</b>	SO 250611	T 8				
<b>...09</b>	TS 220461	T 7				
<b>S10 ...11</b>	SO 300551	T 9				
<b>...11</b>	SO 301001	T 9				
<b>S16R...11</b>	SO 300401	T 9				
<b>...1102</b>	SO 250501	T 7				
<b>...1103</b>	SO 301001	T 9				
<b>...16T3</b>	TS 350701/HG	T 15				
<b>...16</b>	SO 351241	T 15				

# C-STFPR/L E-STFPR/L



## Screw type boring bars

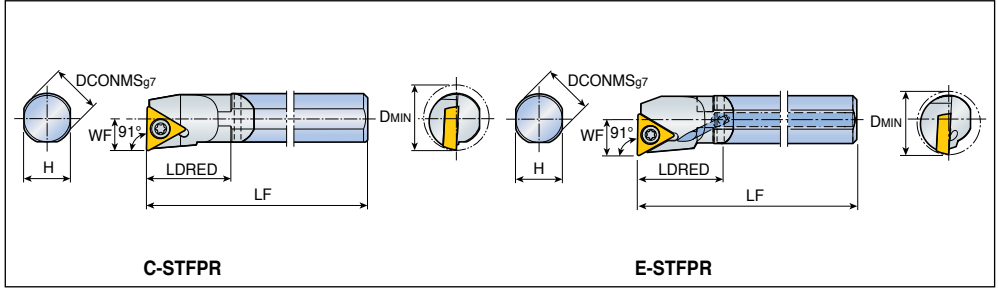

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	✓ C10K STFPR/L 11	10	9	125	15	6	12	TPGT 1103...
	✓ C12M STFPR/L 11	12	11	150	20	8	16	TPMT 1103... A326-A328, A363
91°	✓ E08K STFPR/L 09	8	7	125	15	6	11	TP...T 0902...
	✓ E10K STFPR/L 1102	10	9	125	15	7	13	TP...T 1102...
	✓ E12M STFPR/L 1102	12	11	150	18	9	16	
	✓ E16R STFPR/L 1102	16	15	200	21.5	11	20	
	✓ E12M STFPR/L 1103	12	11	150	18	9	16	TP...T 1103...
	✓ E16R STFPR/L 1103	16	15	200	22	11	20	TPMT 1103...

• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Wrench					
	...09	TS 22046I	T 7				
C10K ...11	SO 30055I	T 9					
C12M...11	SO 30100I	T 9					
...1102	SO 25050I	T 7					
...1103	SO 30100I	T 9					

# S-STUBR/L C-STUBR/L



## Screw type boring bars

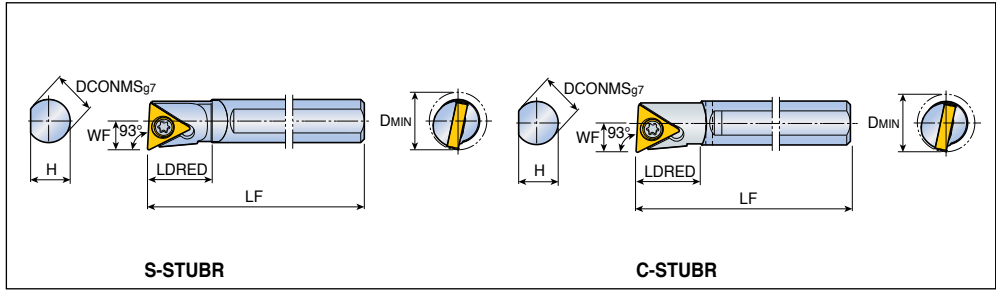

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S06H STUBR/L 06-D08</b>	6	5.5	100	8.6	4	8	TB...T 0601... A323
93°	<b>✓ C06J STUBR/L 06-D08</b>	6	5.5	110	8.6	4	8	

• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Wrench					
	...06-D08	 TS 20043I/HG-P	 T 6P				

# S-STUNR/L A-STUNR/L



## Screw type boring bars

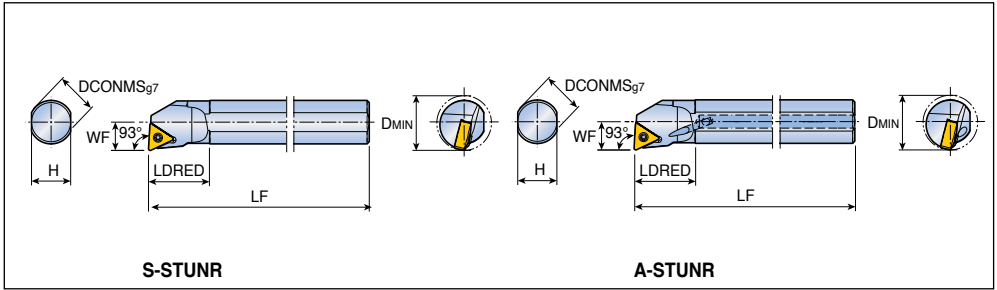

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S16Q STUNR/L 1304</b>	16	15	180	25	11	20	TN... 1304... RHINO TURN A291-A296
	<b>S20Q STUNR/L 1304</b>	20	18	180	28	13	25	
93°	<b>A16Q STUNR/L 1304</b>	16	15	180	25	11	20	
	<b>A20Q STUNR/L 1304</b>	20	18	180	28	13	25	


## Spare parts

Designation	Screw	Wrench					
	...1304	TS 30080I/HG	T 9				

# C-STZBR/L




## Screw type boring bars



C-STZBR

Approach angle	Designation	Dimension (mm)							Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
95°	✓ C06J STZBR/L 06-D085	6	5.5	110	5	5.1	8.5	TB...T 0601... A323	



• ✓ Marked: Designates carbide shank


### Spare parts

Designation	Screw	Wrench					
	...06-D085	SO 25043I	T 6P				

# S-SVJBR/L S-SVJCR/L



## Screw type boring bars

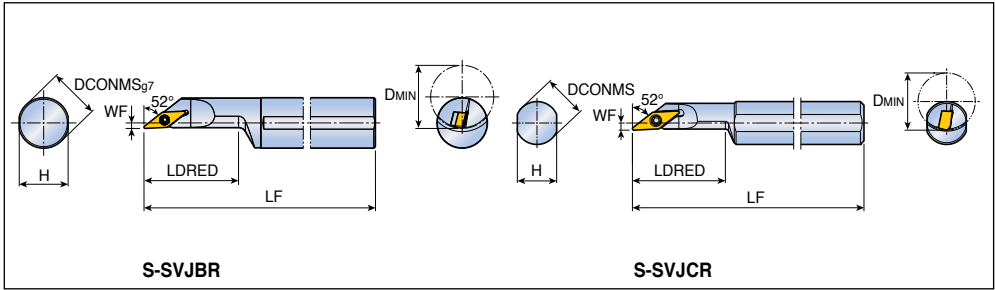

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
52°	<b>S20R SVJBR/L 11-D25</b>	20	18	200	37.5	2	25	VB... 1103... A330, A365
	<b>S25S SVJBR/L 11-D30</b>	25	23	250	45	3.5	30	
	<b>S32S SVJBR/L 16</b>	32	30	250	60	3.5	40	
	<b>S40T SVJBR/L 16</b>	40	37	300	75	4.5	50	
52°	<b>S12M SVJCR/L 08-D16</b>	12	11	150	26	2	16	VC... 0802... A333
	<b>S16Q SVJCR/L 08-D20</b>	16	15	180	36	2	20	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
...08-...	TS 20038I/HG-P	-	-	T 6P	-			
...11-...	SO 25065I	-	-	T 7	-			
...16	SO 35124I	SSV32	SO 50090S	T15	L-W 3.5			

# S-SVJPR/L A-SVLNR/L



## Screw type boring bars

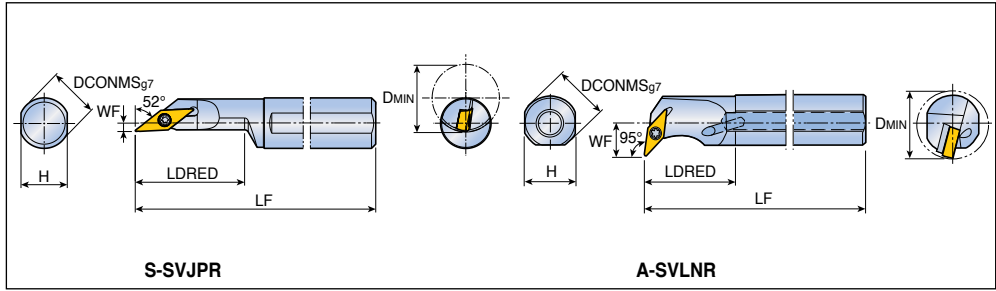

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
52°	<b>S12M SVJPR/L 08-D16</b>	12	11	150	26	2	16	VP...T 0802... A334
95°	<b>A25T SVLNR/L 1304</b>	25	23	300	40	16	31	VN...X 1304... A299, A305
	<b>A32T SVLNR/L 1304</b>	32	30	300	45	20	38	YNMG 1304... RHINO TURN
	<b>A25T SVLNR/L 13</b>	25	23	300	40	16	31	VN... 13... A297, A298
	<b>A32T SVLNR/L 13</b>	32	30	300	45	20	38	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw	Shim	Shim screw	Wrench		Seal		
<b>S...08-D16</b>	TS 20043I/HG-P	-	-	T 6P	-	-		
<b>A..1304</b>	TS 30120I/HG	SSVN 2.523	TS 5030062S	T 9	L-W 3.5	-		
<b>A25T...13</b>	SO 35120I	SSVN 2.523	TS 5035062S	T 10	L-W 3.5	PL 25		
<b>A32T...13</b>	SO 35120I	SSVN 2.523	TS 5035062S	T 10	L-W 3.5	PL 32		

# S-SVPBR/L S-SVPCR/L



## Screw type boring bars

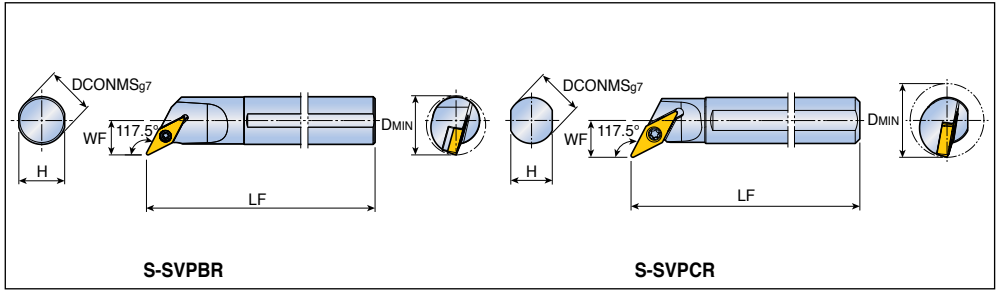

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
117.5°	<b>S16Q SVPBR/L 11-D22</b>	16	15	180	35	13.5	22	VB... 1103...  A330, A365
	<b>S20R SVPBR/L 11-D26</b>	20	18	200	41	15.5	26	
	<b>S25S SVPBR/L 16</b>	25	23	250	51	18	31	VB... 1604...  A330, A331 A365
	<b>S32S SVPBR/L 16</b>	32	30	250	54	23	40	
117.5°	<b>S10K SVPCR/L 08-D16</b>	10	9	125	16	8	16	VC...T 0802...
	<b>S12M SVPCR/L 11-D20</b>	12	11	150	19	10	20	


• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench				
...08-...	TS 20038I/HG-P	-	-	T 6P	-			
...11-...	SO 25065I	-	-	T 7	-			
...16	SO 35124I	SSV32	SO 50090S	T 15	L-W 3.5			

# A-SVPCR/L

## Screw type boring bars

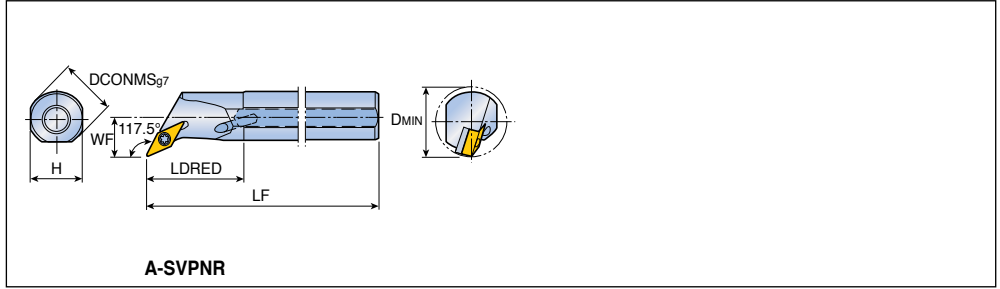

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>117.5°</b>	<b>A25T SVPCR/L 1304</b>	25	23	300	45	19	33	VN...X 1304...
	<b>A32T SVPCR/L 1304</b>	32	30	300	47	26	44	YNMG 1304... <b>A299, A305</b> <i>RHINO TURN</i>
	<b>A25T SVPCR/L 13</b>	25	23	300	45	19	33	VN... 13...
	<b>A32T SVPCR/L 13</b>	32	30	300	47	26	44	<b>A297, A298</b>


## Spare parts





Designation	Screw	Shim	Shim screw	Wrench		Seal		
<b>A..1304</b>	TS 30120I/HG	SSVN 2.523	TS 5030062S	T 9	L-W 3.5	-		
<b>A25T...13</b>	SO 35120I	SSVN 2.523	TS 5035062S	T 10	L-W 3.5	PL 25		
<b>A32T...13</b>	SO 35120I	SSVN 2.523	TS 5035062S	T 10	L-W 3.5	PL 32		

# S-SVQBR/L S-SVQCR/L



## Screw type boring bars

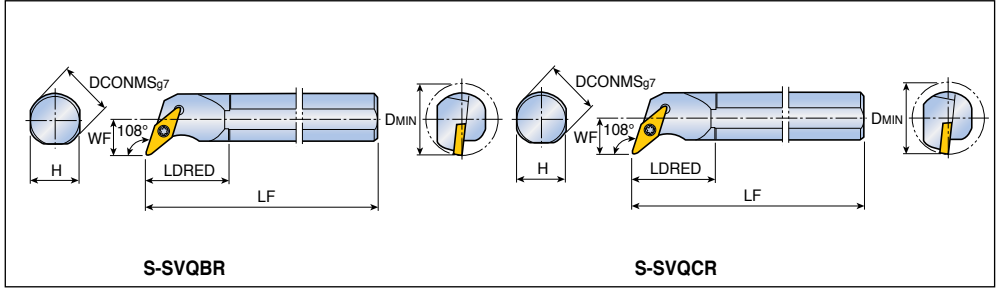

Approach angle	Designation	Dimension (mm)						Insert	
		DCONMS	H	LF	LDRED	WF	DMIN		
108° 	<b>S25T SVQBR/L 16</b>	25	23	300	40	17	32	VB... 1604...  A330, A331, A365	
	<b>S32T SVQBR/L 16</b>	32	30	300	45	22	40		
	<b>S40T SVQBR/L 16</b>	40	37	300	41.5	27	50		
108° 	<b>S32T SVQCR/L 16</b>	32	30	300	45	22	40	VC...T 1604...  A332, A333, A365	
	<b>S40T SVQCR/L 16</b>	40	37	300	55	27	50		

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts



Designation	Screw	Shim	Shim screw	Wrench			
							
<b>S25T...16</b>	SO 35080I	-	-	T 15	-		
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	T 15	L-W 3.5		

# S-SVUBR/L S-SVUCR/L



## Screw type boring bars

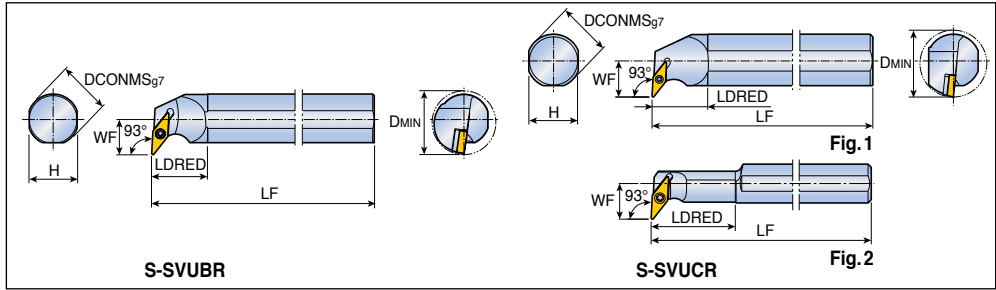

Approach angle	Designation	Dimension (mm)						Fig.	Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
93° 	<b>S32T SVUBR/L 16</b>	32	30	300	45	22	40	VB... 1604... A330, A331, A365	
	<b>S40T SVUBR/L 16</b>	40	37	300	55	27	50		
93° 	<b>S12M SVUCR/L 08-D16</b>	12	11	150	26	11	16	2	VC...T 0802...
	<b>S16Q SVUCR/L 11-D20</b>	16	15	180	32	15.5	20	2	VC...T 1103... A332, A333, A365
	<b>S20R SVUCR/L 11-D25</b>	20	18	200	40	17.5	25	2	VC...T 1604... A365
	<b>S32T SVUCR/L 16</b>	32	30	300	35	22	40	1	
	<b>S40T SVUCR/L 16</b>	40	37	300	41.5	27	50	1	

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts

Designation	Screw 	Shim 	Shim screw 	Wrench 	
<b>...08...</b>	TS 20038I/HG-P	-	-	T 6P	-
<b>...11...</b>	SO 25065I	-	-	T 7	-
<b>...16</b>	SO 35124I	SSV 32	SO 50090S	T 15	L-W 3.5

# S-SWLNLR/L A-SWLNLR/L



## Screw type boring bars

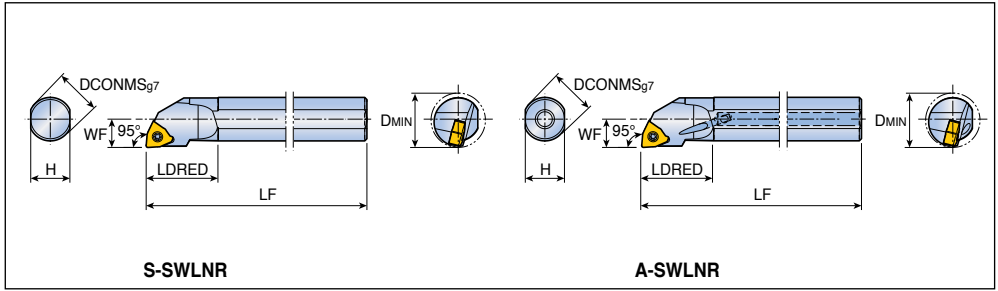


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>S16Q SWLNLR/L 0604</b>	16	15	180	30	11	20	WN...X 0604... RHINO TURN A303, A304
	<b>S20Q SWLNLR/L 0604</b>	20	18	180	33	13	25	
95°	<b>A12M SWLNLR/L 0403</b>	12	11	150	21.5	9	16	WNMX 0403...
	<b>A16Q SWLNLR/L 0403</b>	16	15	180	24.5	11	20	RHINO TURN
	<b>A16Q SWLNLR/L 0604</b>	16	15	180	30	11	20	WNMX 0604..
	<b>A20Q SWLNLR/L 0604</b>	20	18	180	33	13	25	RHINO TURN

## Spare parts

Designation	Screw	Wrench					
...0604	TS 350831/HG	T 10					
...0403	TS 25D060/HG-P	T 7P					

## Screw type boring bars

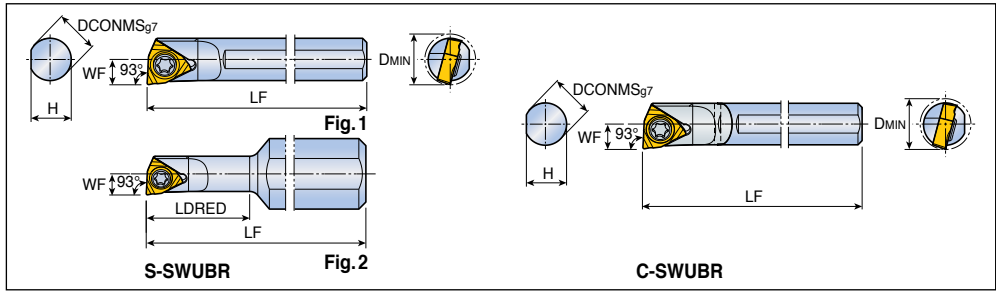

Approach angle	Designation	Dimension (mm)						Fig.	Insert
		DCONMS	H	LF	LDRED	WF	DMIN		
93°	<b>S05G SWUBR/L 06-D06</b>	5	4.75	90	-	3	6	1	WB...T 0601... A335
	<b>S06H SWUBR/L 06-D07</b>	6	5.5	100	-	3.5	7	1	
	<b>S07J SWUBR/L 06-D08</b>	7	6.5	110	-	4	8	1	
	<b>S10H SWUBR/L 06-D06</b>	10	9	100	18	3	6	2	
93°	✓ <b>C05H SWUBR/L 06-D06</b>	5	4.75	100	-	3	6		
	✓ <b>C06J SWUBR/L 06-D07</b>	6	5.5	110	-	3.5	7		
	✓ <b>C07K SWUBR/L 06-D08</b>	7	6.5	125	-	4	8		

• ✓ Marked: Designates carbide shank • L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder


## Spare parts



Designation	Screw	Wrench						
	...06...	TS 20038I/HG-P	T 6P					

# A-SXQNR/L A-SXUNR/L



## Screw type boring bars

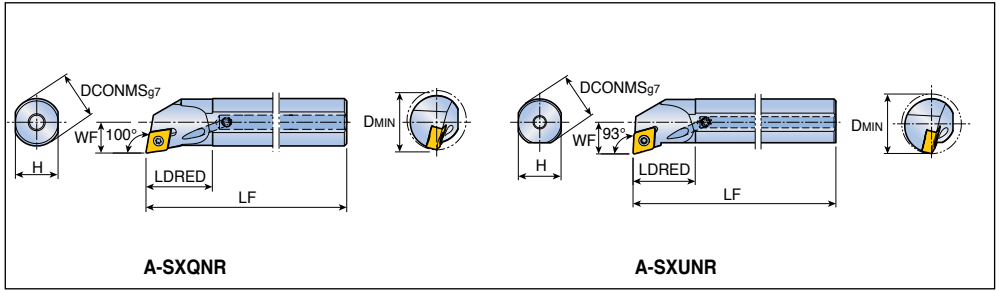

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>100°</b> 	<b>A16Q SXQNR/L 0904</b>	16	15	180	24.5	11	20	XNMG 0904...
	<b>A20Q SXQNR/L 0904</b>	20	18	180	28	13	25	<b>RHINOXTURN</b> XNMG 1105...
	<b>A20Q SXQNR/L 1105</b>	20	18	180	28	13	25	<b>RHINOXTURN</b> A305
<b>93°</b> 	<b>A25R SXUNR/L 1105</b>	25	23	200	33.4	17	32	XN... 1105...
								<b>RHINOXTURN</b> <b>POSTURN</b>
								A305, A306


## Spare parts

Designation	Screw	Wrench				
...0904	TS 30080I/HG	T 9				
...1105	TS 40G110I	T 15				

# S-TCLNR/L



## T-holder type boring bars

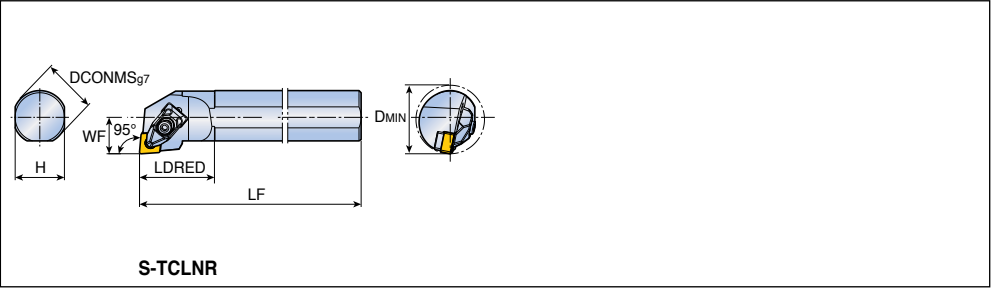


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	D<sub>MIN</sub>	
<b>95°</b>	<b>S25R TCLNR/L 0904</b>	25	23	200	35	17	32	CN... 0904...   A266, A268-A273
	<b>S32S TCLNR/L 0904</b>	32	30	250	35	22	40	
	<b>S40T TCLNR/L 0904</b>	40	37	300	45	27	50	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
<b>S25R ...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSC 32	SO 40073I	L-W 2.5	T 15
<b>S32S,S40T...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSC 32	SO 40085I	L-W 2.5	T 15

## T-holder type boring bars

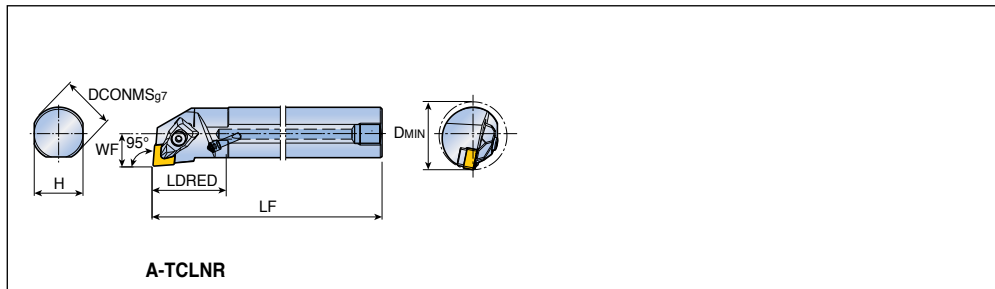


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>A25R TCLNR/L 0904</b>	25	23	200	35	17	32	CN... 0904...  A266, A268-A273
	<b>A32S TCLNR/L 0904</b>	32	30	250	35	22	40	
	<b>A25T TCLNR/L 12</b>	25	23	300	45	17	32	CN... 1204...  A266, A268-A273, A275, A341, A342, A353
	<b>A32T TCLNR/L 12</b>	32	30	300	45	22	40	
	<b>A40T TCLNR/L 12</b>	40	37	300	45	27	50	
	<b>A50U TCLNR/L 12</b>	50	47	350	45	35	63	

### Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>A25R...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSC 32	SO 40073I	NZ 62	L-W 2.5	T 15
<b>A32S...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSC 32	SO 40085I	NZ 62	L-W 2.5	T 15
<b>A25T...12</b>	DLM 4	DLS 4	DSP 4	LSC 42	TS 50A105I	NZ 62	L-W 3	T 20
<b>A32T...12</b>	DLM 4	DLS 4	DSP 4	LSC 42	TS 50A105I	NZ 62	L-W 3	T 20
<b>A40T...12</b>	DLM 4	DLS 4	DSP 4	TSC 44	SO 40050I	NZ 104	L-W 3	T 15
<b>A50U...12</b>	DLM 4	DLS 4	DSP 4	TSC 44	SO 40050I	NZ 104	L-W 3	T 15

## T-holder type boring bars with high pressure coolant

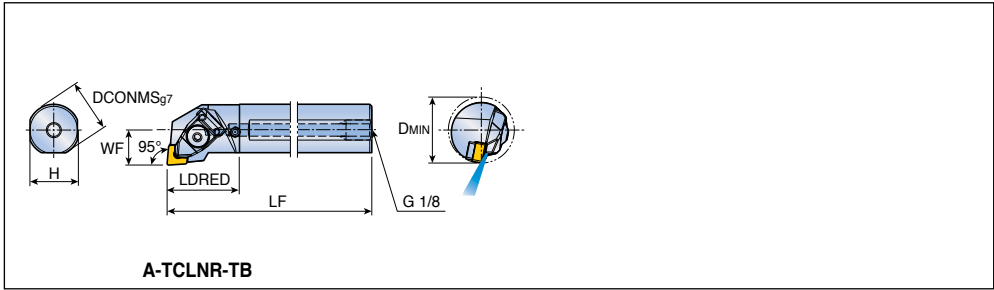

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>95°</b>	<b>A25R TCLNR/L 0904-TB</b>	25	23	200	33.4	17	32	CN... 0904...  A266, A268-A273
	<b>A32S TCLNR/L 0904-TB</b>	32	30	250	33.4	22	40	


### Spare parts






Designation	Clamp	Clamp screw	Spring	Upper O-ring	Lower O-ring	Shim	Shim screw	Wrench	
<b>A-TCLNR/L-TB</b>	DLM 3-NX-TB	BH M4x0.7x16-TB	DSP 3	O-RING ID4.47x1.78	O-RING ID6.07x1.78	LSC 32	SO 40073I	L-W 3	T 15

# S-TDUNR/L A-TDUNR/L

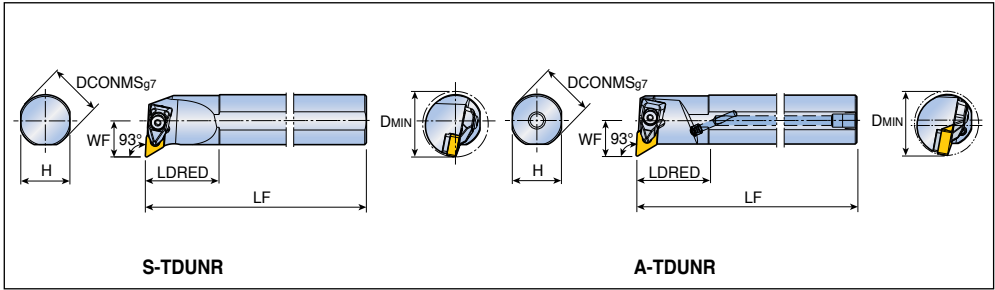

## T-holder type boring bars



Approach angle	Designation	Dimension (mm)						Insert	
		DCONMS	H	LF	LDRED	WF	DMIN		
<b>93°</b> 	<b>S32S TDUNR/L 1305</b>	32	30	250	45	22	40	DN... 1305...  A276-A281	
	<b>S40T TDUNR/L 1305</b>	40	37	300	55	27	50		
<b>93°</b> 	<b>A32S TDUNR/L 1305</b>	32	30	250	45	22	40	DN... 1305... 	
	<b>A40T TDUNR/L 1305</b>	40	37	300	55	27	50		
	<b>A32T TDUNR/L 15</b>	32	30	300	45	22	40		DN... 1506... 
	<b>A40T TDUNR/L 15</b>	40	37	300	45	27	50		
	<b>A50U TDUNR/L 15</b>	50	47	350	45	35	63		
								A276-A281, A343, A354	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
								
<b>S ...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	-	L-W 3	T 20
<b>A32S ...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	NZ 62	L-W 3	T 20
<b>A40T ...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	NZ 104	L-W 3	T 20
<b>A32T ...15</b>	DLM 4	DLS 4	DSP 4	LSD 42	TS 50A105I	NZ 62	L-W 3	T 20
<b>...15</b>	DLM 4	DLS 4	DSP 4	TSD 43	SO 40050I	NZ 104	L-W 3	T 15

# S-TDZNR/L A-TDZNR/L



## T-holder type boring bars

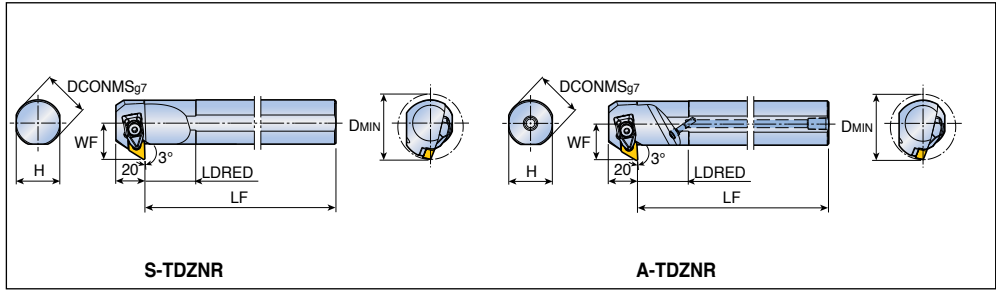

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S32S TDZNR/L 1305</b>	32	30	250	35	25	45	DN... 1305... RHINO TURN A276-A281
	<b>S40T TDZNR/L 1305</b>	40	37	300	40	29	50	
93°	<b>A32S TDZNR/L 1305</b>	32	30	250	35	25	45	
	<b>A40T TDZNR/L 1305</b>	40	37	300	40	29	50	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>S ...1305</b>								
<b>A32S...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	-	L-W 3	T 20
<b>A32S...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	NZ 62	L-W 3	T 20
<b>A40T...1305</b>	DLM 3.5-NX	DLS 4	DSP 4	LSD 3.52B	TS 50A105I	NZ 104	L-W 3	T 20

# A-THSNR/L



## T-holder type boring bars

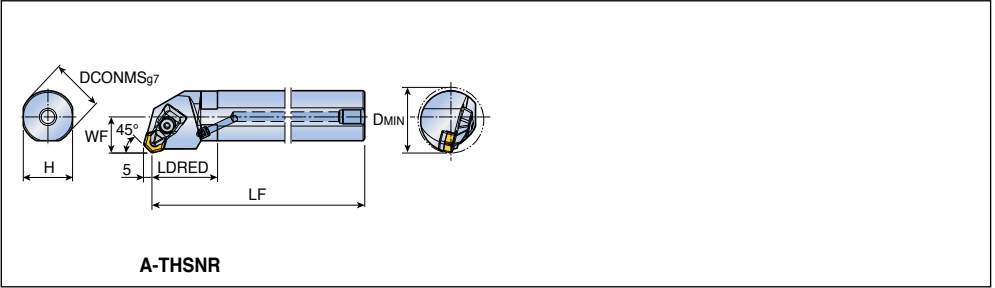

A-THSNR

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
45°	<b>A32T THSNR/L 05</b>	32	30	300	40	22	40	HN...G 0504... A282
	<b>A40T THSNR/L 05</b>	40	37	300	45	27	50	
	<b>A50U THSNR/L 05</b>	50	47	350	45	35	63	


### Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>A32T ...05</b>								
<b>DLM 4</b>	DLM 4	DLS 4	DSP 4	TSH 42	SO 40050I	NZ 62	L-W 3	T 15
<b>...05</b>	DLM 4	DLS 4	DSP 4	TSH 44	SO 40050I	NZ 104	L-W 3	T 15

# S-TSKNR/L A-TSKNR/L



## T-holder type boring bars

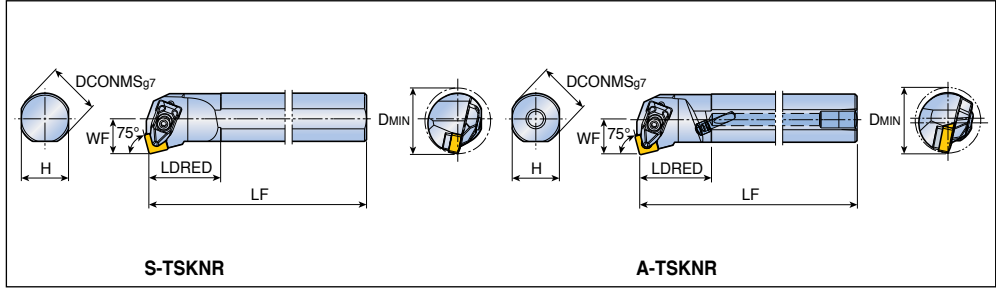


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
75°	<b>S25R TSKNR/L 0904</b>	25	23	200	35	17	32	SN... 0904...
	<b>S32S TSKNR/L 0904</b>	32	30	250	35	22	40	<b>RHINOTURN</b> A284-A290
75°	<b>A25R TSKNR/L 0904</b>	25	23	200	35	17	32	SN... 0904...
	<b>A32S TSKNR/L 0904</b>	32	30	250	35	22	40	<b>RHINOTURN</b>
	<b>A25T TSKNR/L 12</b>	25	23	300	45	17	32	SN... 1204...
								A284-A290, A346, A347, A356

• L-hand insert for R-hand toolholder, R-hand insert for L-hand toolholder

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>S25R...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32	SO 400731	-	L-W 2.5	T 15
<b>S32S...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32	SO 400851	-	L-W 2.5	T 15
<b>A25R...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32	SO 400731	NZ 62	L-W 2.5	T 15
<b>A32S...0904</b>	DLM 3-NX	DLS 3	DSP 3	LSS 32	SO 400851	NZ 62	L-W 2.5	T 15
<b>A25T...12</b>	DLM 4	DLS 4	DSP 4	LSS 42	TS 50A1051	NZ 62	L-W 3	T 20

## T-holder type boring bars

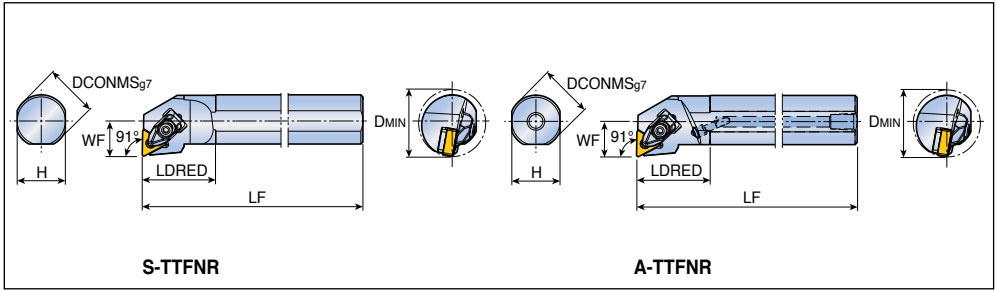


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	<b>S25R TTFNR/L 1304</b>	25	23	200	35	17	32	TN... 1304... A291-A296
	<b>S32S TTFNR/L 1304</b>	32	30	250	35	22	40	
91°	<b>A25R TTFNR/L 1304</b>	25	23	200	35	17	32	
	<b>A32S TTFNR/L 1304</b>	32	30	250	35	22	40	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>S25R...1304</b>							L-W 2.5	T 15
<b>S32S...1304</b>							L-W 2.5	T 15
<b>A25R...1304</b>							L-W 2.5	T 15
<b>A32S...1304</b>							L-W 2.5	T 15

## T-holder type boring bars

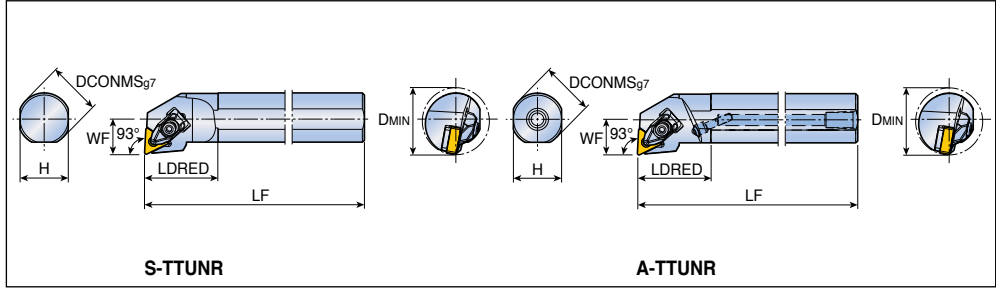


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
93°	<b>S25R TTUNR/L 1304</b>	25	23	200	35	17	32	TN... 1304...  A291-A296
	<b>S32S TTUNR/L 1304</b>	32	30	250	35	22	40	
93°	<b>A25R TTUNR/L 1304</b>	25	23	200	35	17	32	
	<b>A32S TTUNR/L 1304</b>	32	30	250	35	22	40	

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>S25R...1304</b>								
<b>S32S...1304</b>	DLM 2.5-NX	DLS 3	DSP 3	LST 2.52B	SO 40073I	-	L-W 2.5	T 15
<b>A25R...1304</b>	DLM 2.5-NX	DLS 3	DSP 3	LST 2.52B	SO 40073I	NZ 62	L-W 2.5	T 15
<b>A32S...1304</b>	DLM 2.5-NX	DLS 3	DSP 3	LST 2.52B	SO 40085I	NZ 62	L-W 2.5	T 15

## T-holder type boring bars

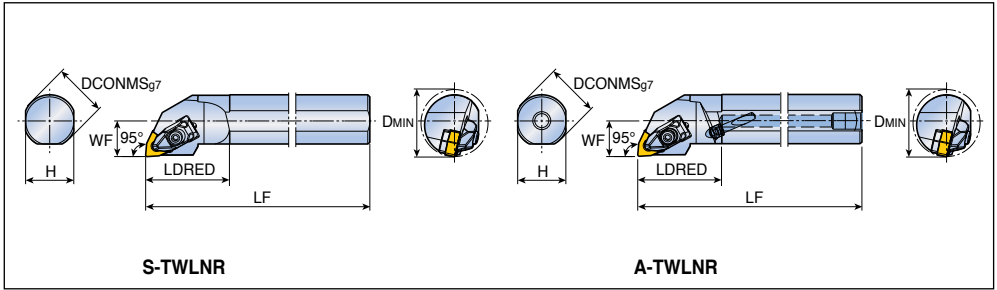

Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
 95°	<b>S25R TWLNR/L 0604</b>	25	23	200	40	17	32	WN...X 0604... A300-A304,
	<b>S32S TWLNR/L 0604</b>	32	30	250	45	22	40	WN... 0804... A350, A359
	<b>S25T TWLNR/L 08</b>	25	23	300	35	17	32	
	<b>S32T TWLNR/L 08</b>	32	30	300	45	22	40	
 95°	<b>A25R TWLNR/L 0604</b>	25	23	200	40	17	32	WN...X 0604... 
	<b>A32S TWLNR/L 0604</b>	32	30	250	45	22	40	WN... 0604... 
	<b>A20S TWLNR/L 06</b>	20	18	250	35	13	25	WN... 0604... WN... 0804...
	<b>A25T TWLNR/L 06</b>	25	23	300	40	17	32	
	<b>A32T TWLNR/L 06</b>	32	30	300	45	22	40	
	<b>A25T TWLNR/L 08</b>	25	23	300	40	17	32	
	<b>A32T TWLNR/L 08</b>	32	30	300	45	22	40	
	<b>A40T TWLNR/L 08</b>	40	37	300	45	27	50	


## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>S25R...0604</b>							L-W 2.5	T 15
<b>S32S...0604</b>	DLM 3-NX	DLS 3	DSP 3	LSW 32	SO 40073I	-	L-W 2.5	T 15
<b>A25R...0604</b>	DLM 3-NX	DLS 3	DSP 3	LSW 32	SO 40073I	NZ 62	L-W 2.5	T 15
<b>A32S...0604</b>	DLM 3-NX	DLS 3	DSP 3	LSW 32	SO 40085I	NZ 62	L-W 2.5	T 15
<b>A20S...06</b>	DLM 3	DLS 3	DSP 3	-	-	NZ 62	L-W 2.5	-
<b>...06</b>	DLM 3	DLS 3	DSP 3	PSW 32	SO 40090I	NZ 62	L-W 2.5	T 15
<b>...08</b>	DLM 4	DLS 4	DSP 4	PSW 42	TS 50A105I	NZ 62	L-W 3	T 20
<b>A40T...08</b>	DLM 4	DLS 4	DSP 4	TSW 44	SO 40050I	NZ 104	L-W 3	T 15

# A-TXQNR/L A-TXUNR/L



## T-holder type boring bars

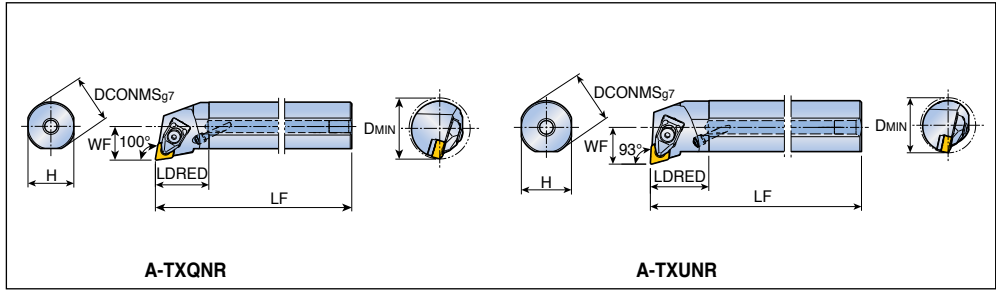


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
<b>100°</b>	<b>A25R TXQNR/L 1105</b>	25	23	200	33.4	17	32	XNMG 1105... <b>RHINOXTURN</b>  A305
	<b>A32S TXQNR/L 1105</b>	32	30	250	35	22	40	
<b>93°</b>	<b>A32S TXUNR/L 1105</b>	32	30	250	35	22	40	XN... 1105... <b>RHINOXTURN</b> <b>POSTURN</b>  A305, A306

## Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Nozzle	Wrench	
<b>A25R...1105</b>								
<b>A25R...1105</b>	DLM 3.5-NX	DLS 4	DSP 4	-	-	NZ 62	L-W 3	-
<b>A32S...1105</b>	DLM 3.5-NX	DLS 4	DSP 4	LSX 3.52B	TS 50A105I	NZ 62	L-W 3	T 20

## Wedge clamp type boring bars

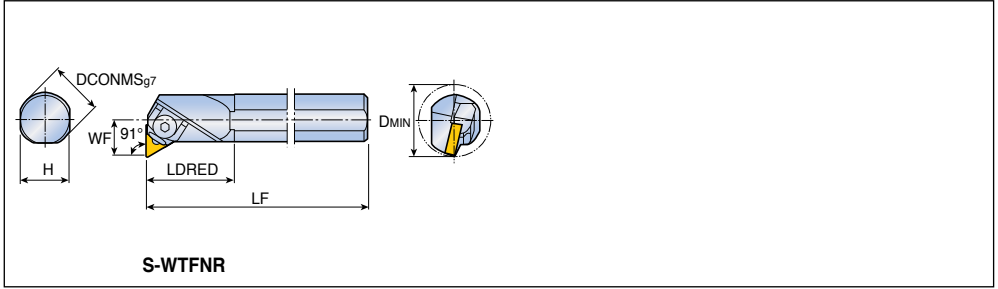


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
91°	<b>S25R WTFNR/L 1304</b>	25	23	200	40	17	32	TN... 1304...
	<b>S32S WTFNR/L 1304</b>	32	30	250	45	22	40	A291-A296
	<b>S25T WTFNR/L 16</b>	25	23	300	50	17	32	TN... 1604...
	<b>S32T WTFNR/L 16</b>	32	30	300	55	22	40	A291-A296, A349, A357
	<b>S40T WTFNR/L 16</b>	40	37	300	60	27	50	
	<b>S40T WTFNR/L 22</b>	40	37	300	60	27	50	TN... 2204...
	<b>S50U WTFNR/L 22</b>	50	47	350	65	35	63	

## Spare parts

Designation	Wedge clamp	Screw	Snap ring	Shim	Pin screw	Wrench	
<b>S25R...1304</b>	WC 2.53	WCS 2.5	CSR 2	-	WSS 2.52-1	L-W 2.5	
<b>S32S...1304</b>	WC 2.53	WCS 2.5	CSR 2	WST 2.52	WSS 2.52	L-W 2.5	
<b>S25T...16</b>	WC 33	WCS 4B	WSR 4	-	WSS 33-1	L-W 3	
<b>...16</b>	WC 33	WCS 4	WSR 4	WST 33	WSS 33	L-W 3	
<b>...22</b>	WC 43	WCS 4	WSR 4	WST 43	WSS 43	L-W 3	

# S-TCLNR/L-CH

## T-holder type boring bars for CH dimple insert

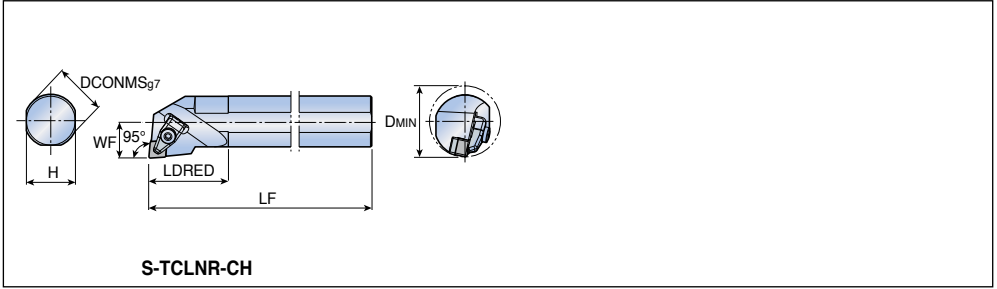


Approach angle	Designation	Dimension (mm)						Insert
		DCONMS	H	LF	LDRED	WF	DMIN	
95°	<b>S40T TCLNR/L 1207-CH</b>	40	37	300	50	27	70	CN...X 1207... A342
	<b>S50U TCLNR/L 1207-CH</b>	50	47	350	50	32	70	

### Spare parts

Designation	Clamp	Clamp screw	Spring	Shim	Shim screw	Wrench	
...1207-CH	CCL 4	CSC 4	DSP 5	TSC 43	SO 400501	L-W 4	T 15

## Sleeve

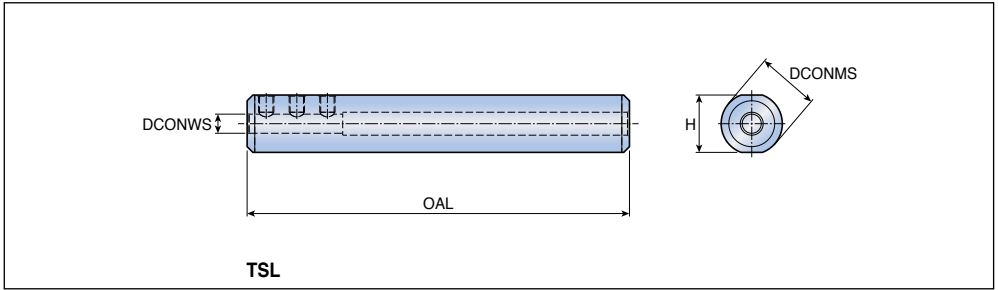


Designation	Dimension (mm)			
	DCONWS	H	OAL	DCONMS
<b>TSL 16-04</b>	4	15	100	16
<b>16-05</b>	5	15	100	16
<b>16-06</b>	6	15	100	16
<b>16-07</b>	7	15	100	16

## Spare parts

Designation	Set screw	Wrench					
<b>TSL...</b>	SS M4x0.7x4	L-W 2					

## Anti-vibration shanks for boring

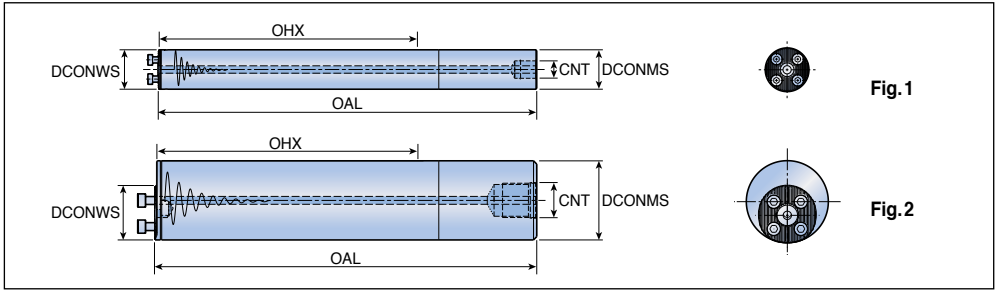

Designation	Dimension (mm)					Coolant hole	Fig.
	DCONMS	DCONWS	OAL	OHX	CNT		
<b>QS16A-7D</b>	16	16	156.3	92	G 1/8	●	1
<b>QS16E-10D<sup>(1)</sup></b>	16	16	204.3	140	-	●	1
<b>QS20A-7D</b>	20	20	200.3	120	G 1/4	●	1
<b>QS20E-10D<sup>(1)</sup></b>	20	20	260.3	180	-	●	1
<b>QS25A-7D</b>	25	25	257.5	155	G 1/4	●	1
<b>QS25A-10D</b>	25	25	332.5	230	G 1/4	●	1
<b>QS32A-7D</b>	32	32	323.0	192	G 3/8	●	1
<b>QS32A-10D</b>	32	32	419.0	288	G 3/8	●	1
<b>QS40A-7D</b>	40	40	411.0	251	G 1/2	●	1
<b>QS40A-10D</b>	40	40	531.0	368	G 1/2	●	1
<b>QS50A-7D</b>	50	40	523.0	318	G 1/2	●	2
<b>QS50A-10D</b>	50	40	673.0	468	G 1/2	●	2
<b>QS60A-7D</b>	60	40	633.0	388	G 3/4	●	2
<b>QS60A-10D</b>	60	40	813.0	568	G 3/4	●	2


• OHX: Maximum overhang

• <sup>(1)</sup> Carbide shank

## Spare parts


Designation	Screw	Wrench				
<b>QS16</b>	SH M3x0.5X10	L-W 2.5				
<b>QS20</b>	SH M3.5x0.6X10	L-W 2.5				
<b>QS25</b>	SH M4x0.7X12	L-W 3				
<b>QS32</b>	SH M5x0.8X12	L-W 4				
<b>QS40/50/60</b>	SH M6x1X16	L-W 5				

## HUSH-BORE sleeve

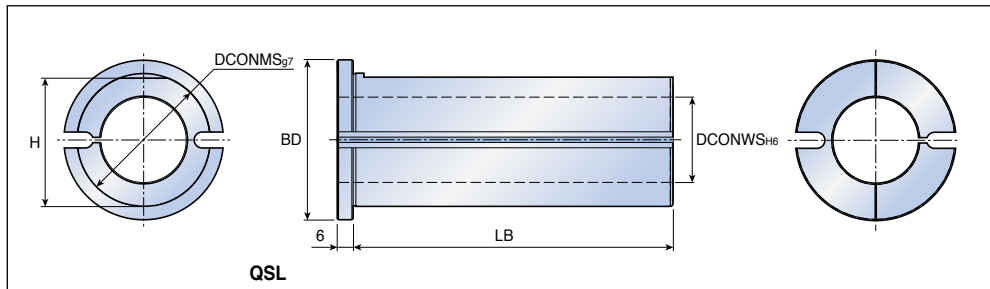

Designation	Dimension (mm)				
	DCONMS	DCONWS	BD	LB	H
<b>QSL- 32-16-L66</b>	32	16	42	60	31.0
<b>32-20-L66</b>	32	20	42	60	31.0
<b>32-25-L66</b>	32	25	42	60	31.0
<b>40-16-L106</b>	40	16	50	100	38.5
<b>40-20-L106</b>	40	20	50	100	38.5
<b>40-25-L106</b>	40	25	50	100	38.5
<b>40-32-L106</b>	40	32	50	100	38.5
<b>50-20-L126</b>	50	20	60	120	48.5
<b>50-25-L126</b>	50	25	60	120	48.5
<b>50-32-L126</b>	50	32	60	120	48.5
<b>50-40-L126</b>	50	40	60	120	48.5
<b>60-32-L156</b>	60	32	70	150	58.5
<b>60-40-L156</b>	60	40	70	150	58.5
<b>60-50-L156</b>	60	50	70	150	58.5

## Hook lever type boring heads

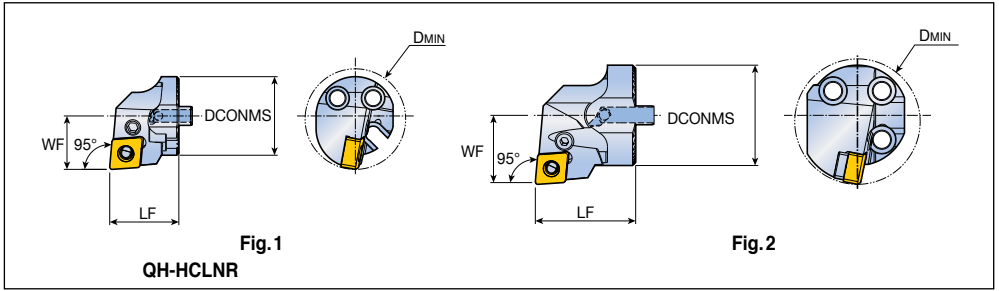


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
95°	<b>QH25-HCLNR/L-0904</b>	25	22	17	32	•	1	CN... 0904... A266, A268-A273
	<b>QH32-HCLNR/L-0904</b>	32	32	22	40	•	2	

### Spare parts

Designation	Lever 	Lever screw 	Shim 	Shim pin 	Snap ring 	Wrench 	
<b>QH25...0904</b>	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2	
<b>QH32...0904</b>	LCL 09-NX	LCS 3	LSC 32	LSP 3A	-	L-W 2.5	

## Hook lever type boring heads

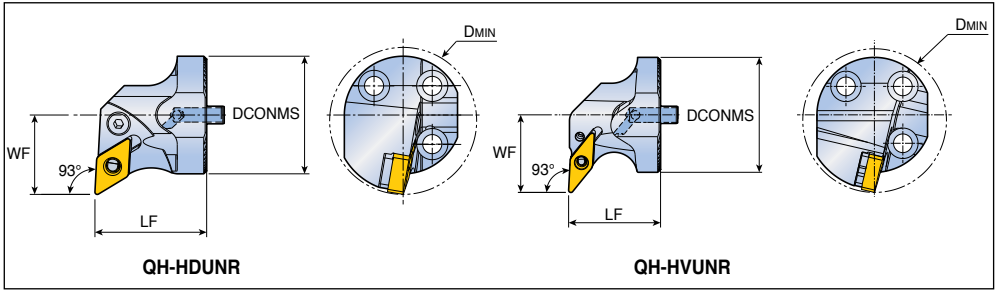


Approach angle	Designation	Dimension (mm)				Coolant hole	Insert
		DCONMS	LF	WF	DMIN		
<b>93°</b> 	<b>QH40-HDUNR/L-1305</b>	40	38	27	50	●	DN...G 1305...  A276-A281
<b>93°</b> 	<b>QH40-HVUNR/L-1304</b>	40	32	27	50	●	VN...X 1304... YNMG 1304...  A297-A299, A305

## Spare parts

Designation	Lever	Lever screw	Shim		Shim pin	Wrench	
<b>HDUNR/L-1305</b>	LCL 11-NX	LCS 4S	LSD 3.52B	-	LSP 4	L-W 3	
<b>HVUNR/L-1304</b>	LCL 08-NX	LCS 4-DH	-	LSV 2.51.8H	LSP 3B	L-W 2.5	

## Screw type boring heads

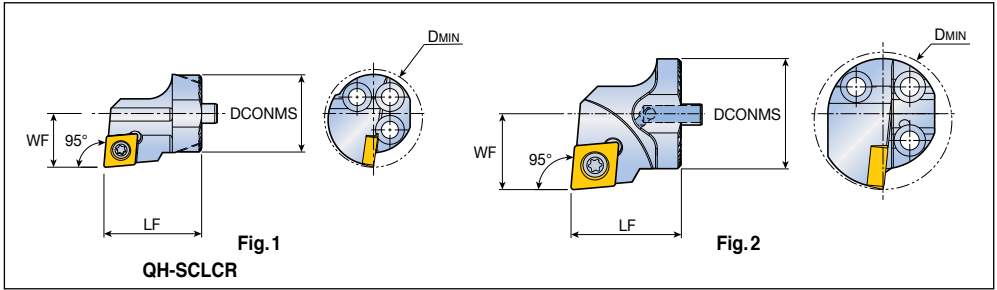


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
	<b>QH16-SCLCR/L-06</b>	16	20	11	20	●	1	CC... 0602...
	<b>QH20-SCLCR/L-09</b>	20	20	13	25	●	2	CC... 09T3...
	<b>QH25-SCLCR/L-09</b>	25	22	17	32	●	2	
	<b>QH32-SCLCR/L-09</b>	32	32	22	40	●	2	
	<b>QH32-SCLCR/L-12</b>	32	32	22	40	●	2	CC... 1204...
	<b>QH40-SCLCR/L-12</b>	40	38	27	50	●	2	

**A309-A312,**  
**A360**

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
<b>...06</b>	SO 250650I	-	-	T 7	-		
<b>...09</b>	SO 35080I	-	-	T 15	-		
<b>QH32...12</b>	SO 45100I	-	-	T 20	-		
<b>QH40...12</b>	SO 45130I	SSC 43N	SO 60105S	T 20	L-W 5		

## Screw type boring heads

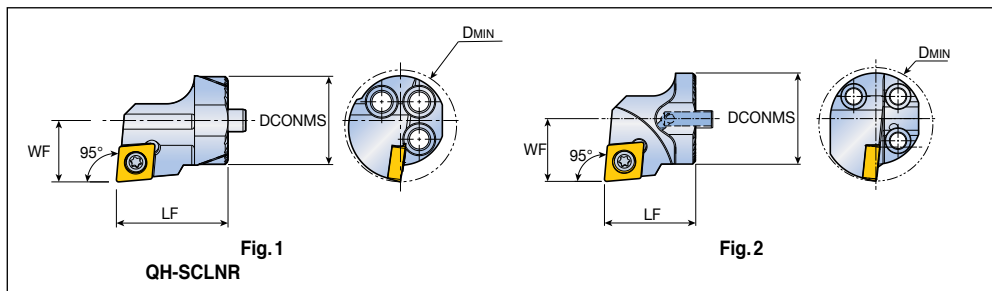


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
95°	<b>QH16-SCLNR/L-0703</b>	16	20	11	20	●	1	CNMX 0703...
	<b>QH20-SCLNR/L-0703</b>	20	20	13	25	●	2	RHINO TURN A275

## Spare parts

Designation	Screw	Wrench				
<b>...0703</b>	TS 25D060/HG-P	T 7P				

## Screw type boring heads

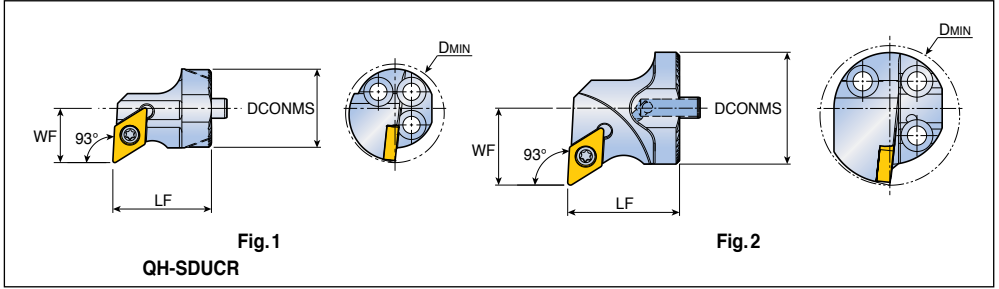


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
	<b>QH16-SDUCR/L-07</b>	16	20	11	20	●	1	DC... 0702...
	<b>QH20-SDUCR/L-11</b>	20	20	13	25	●	2	DC... 11T3...
	<b>QH25-SDUCR/L-11</b>	25	22	17	32	●	2	 A314-A317, A361
	<b>QH32-SDUCR/L-11</b>	32	32	22	40	●	2	
	<b>QH40-SDUCR/L-11</b>	40	38	27	50	●	2	

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench	
...07	SO 250651	-	-	T 7	-
...11	SO 350801	-	-	T 15	-
<b>QH40...11</b>	SO 351241	SSD 32	SO 50090S	T 15	L-W 3.5

## Screw type boring heads

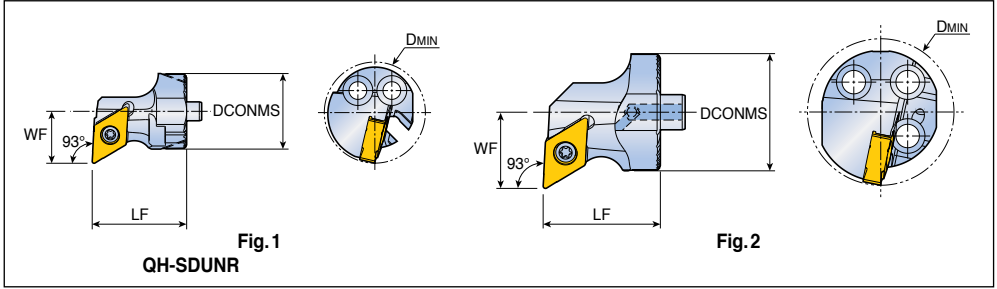


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
<b>93°</b>	<b>QH16-SDUNR/L-0803</b>	16	20	11	20	●	1	DN...X 0803...
	<b>QH20-SDUNR/L-0803</b>	20	20	13	25	●	2	RHINO TURN
	<b>QH32-SDUNR/L-1305</b>	32	32	22	40	●	2	DN...G 1305... RHINO TURN
								A276-A281

## Spare parts

Designation	Screw	Wrench					
...0803	TS 25D060/HG-P	T 7P					
...1305	TS 40G110I	T 15					

## Screw type boring heads

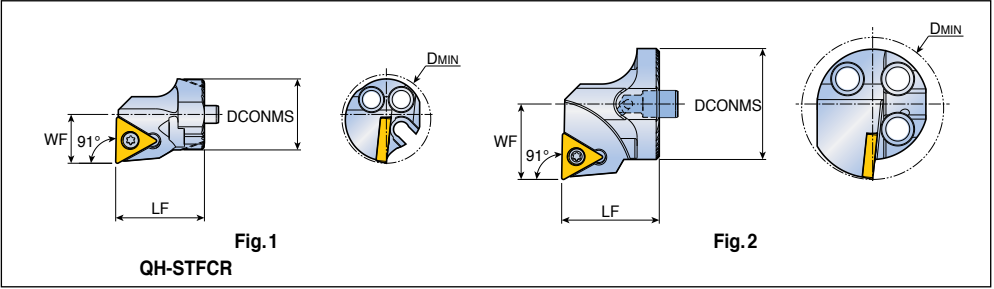




Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
<b>91°</b>	<b>QH16-STFCR/L-11</b>	16	20	11	20	●	1	TC... 1102...
	<b>QH20-STFCR/L-11</b>	20	20	13	25	●	2	
	<b>QH25-STFCR/L-11</b>	25	22	17	32	●	2	
	<b>QH32-STFCR/L-16</b>	32	32	22	40	●	2	
	<b>QH40-STFCR/L-16</b>	40	38	27	50	●	2	TC... 16T3...  A324, A325, A363, A364

## Spare parts

Designation	Screw	Shim	Shim screw	Wrench			
...-11	SO 250651	-	-	T 7	-		
...-16	SO 351241	SST 32	SO 50090S	T 15	L-W 3.5		

## Screw type boring heads

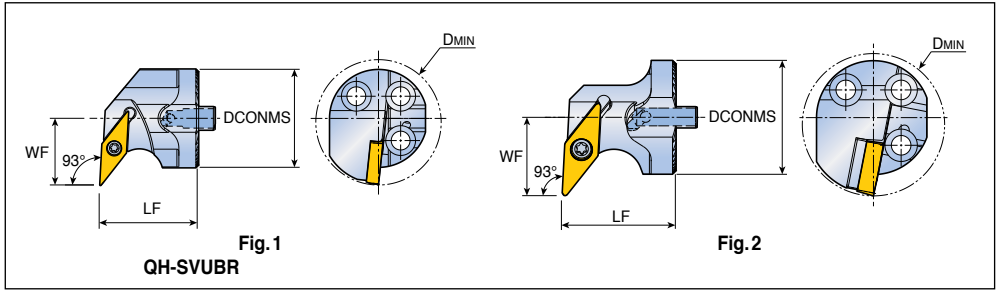


Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
<b>93°</b> 	<b>QH20-SVUBR/L-11</b>	20	20	16	27	●	1	VB... 1103...
	<b>QH25-SVUBR/L-11</b>	25	25	17	31	●	1	
	<b>QH32-SVUBR/L-16</b>	32	32	22	40	●	2	VB... 1604...
	<b>QH40-SVUBR/L-16</b>	40	32	27	50	●	2	 A330, A331, A365

## Spare parts



Designation	Screw	Shim	Shim screw	Wrench			
							
<b>SVUBR/L-11</b>	SO 25065I	-	-	T 7	-		
<b>SVUBR/L-16</b>	SO 35124I	SSV 32	SO 50090S	T 15	L-W 3.5		
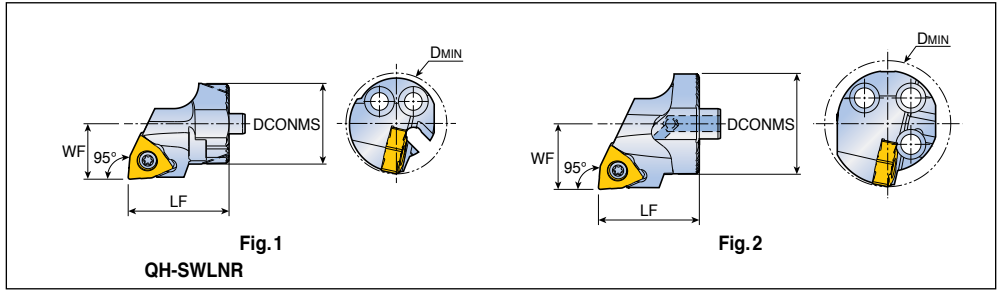
## Screw type boring heads



Approach angle	Designation	Dimension (mm)				Coolant hole	Fig.	Insert
		DCONMS	LF	WF	DMIN			
95°	<b>QH16-SWLNR/L-0403</b>	16	20	11	20	•	1	WN...X 0403...
	<b>QH20-SWLNR/L-0403</b>	20	20	13	25	•	2	<b>RHINO TURN</b> A303

### Spare parts

Designation	Screw	Wrench					
<b>SWLNR/L-0403</b>	 TS 25D060/HG-P	 T 7P					




# Turning Inserts




**C**    **N**    **M**    **G**

**1**    **2**    **3**    **4**


## 1 Shape

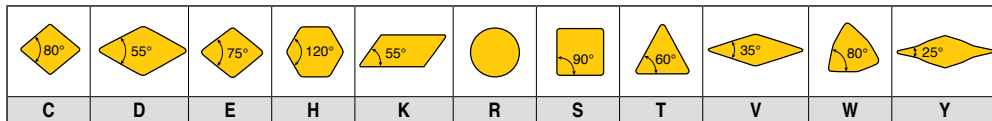

## 2 Clearance angle

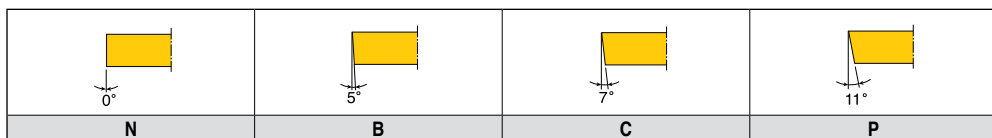


## 3 Tolerance



Class	m	S	IC
A	±0.005	±0.025	±0.025
F	±0.005	±0.025	±0.013
C	±0.013	±0.025	±0.025
H	±0.013	±0.025	±0.013
E	±0.025	±0.025	±0.025
G	±0.025	±0.13	±0.025
M	±0.08~±0.18	±0.13	±0.05~±0.13
U	±0.13~±0.38	±0.13	±0.08~±0.25

Diameter of IC	Tolerance			
	On m		On IC	
	Class M	Class U	Class M	Class U
6.35	±0.08	±0.13	±0.05	±0.08
9.52	±0.08	±0.13	±0.05	±0.08
12.70	±0.13	±0.20	±0.08	±0.13
15.88	±0.15	±0.27	±0.10	±0.18
19.05	±0.15	±0.27	±0.10	±0.18
25.40	±0.18	±0.38	±0.13	±0.25
31.75	±0.18	±0.38	±0.13	±0.25

## 4 Type

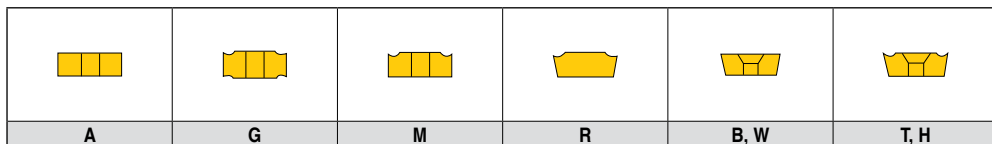

**12** **04** **08** ( **R** ) **MP**

5                  6                  7                  8                  9

## 5 Cutting edge length

I.C(mm)	C	D	E	R	S	T	V, Y	W	K	H
3.97	03	04			03	06		02		
4.76	04	05			04	08	08			
5.56	05	06			05	09	09	03		
6.35	06	07			06	11	11			
7.94	08	09			07	13	13	05		
8.0				08						
9.52	09	11		09	09	16	16	06	16	
10.0				10						
11.11		13								
12.0				12						
12.7	12	15	13		12	22	22	08		05
15.88	16	19		15	15	27	27	10		
16.0				16						
19.05	19	23		19	19	33	33	13		10
20.0				20						
25.0				25						
25.4	25	31		25	25	44	44	17		
31.75	32	38			31	54	54	21		
32.0				32						

## 6 Thickness

01	1.59mm
T1	1.98mm
02	2.38mm
T2	2.78mm
03	3.18mm
T3	3.97mm
04	4.76mm
05	5.56mm
06	6.35mm
07	7.94mm
09	9.52mm

## 7 Corner radius

01	0.1mm
02	0.2mm
04	0.4mm
05	0.5mm
08	0.8mm
12	1.2mm
16	1.6mm
20	2.0mm
24	2.4mm
32	3.2mm


## 8 Hand of insert

<b>R: Right hand</b>	
<b>L: Left hand</b>	

## 9 Chip breaker

For chip breakers, see page A33-A46

## Negative 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.1-1.2
<b>12</b>	12.7	4.76	0.1-1.6
<b>16</b>	15.88	6.35	1.2-1.6
<b>19</b>	19.05	6.35	0.8-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																			
				Cermet		CVD coated								PVD coated									
				PV3010	CT3000	TT3005	TT7015	TT7025	TT8105B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
 Medium	<b>CNGG 090401 ML</b>	0.1-1.0	0.03-0.10														●						●
	<b>090402 ML</b>	0.2-1.2	0.05-0.15														●						●
	<b>090404 ML</b>	0.5-1.5	0.05-0.20														●						●
	<b>090408 ML</b>	0.5-1.5	0.08-0.25														●						●
 Medium	<b>CNGG 120401 ML</b>	0.1-3.5	0.03-0.10														●	●					
	<b>120402 ML</b>	0.2-3.5	0.05-0.15														●	●					●
	<b>120404 ML</b>	0.8-3.5	0.10-0.30														●	●					●
	<b>120408 ML</b>	1.0-3.5	0.12-0.35														●	●					●
 Roughing	<b>CNMA 090408</b>	1.0-3.0	0.15-0.60			●	●																
	<b>090412</b>	1.0-3.0	0.15-0.70			●	●																
 Roughing	<b>CNMA 120404</b>	1.0-5.0	0.15-0.50			●	●	●															●
	<b>120408</b>	1.0-6.0	0.15-0.60			●	●	●															●
	<b>120412</b>	1.5-6.0	0.15-0.70			●	●	●	●														
	<b>120416</b>	2.0-6.0	0.20-0.80			●	●	●															
	<b>160612</b>	2.0-8.0	0.15-0.70			●	●	●															
	<b>160616</b>	2.0-8.0	0.20-0.80			●																	
	<b>190608</b>	2.0-10.0	0.15-0.70			●																	
	<b>190612</b>	2.0-10.0	0.15-0.70			●	●																
	<b>190616</b>	3.0-10.0	0.15-1.00			●	●	●															
 Roughing	<b>CNMA 120408 WT</b>	0.7-5.0	0.15-0.80			●																	

● : Standard items

A55, A69-A71, A86,  
A120-A122, A176, A178, A199,  
A208, A214, A237-A239, A253

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>19</b>	19.05	6.35	2.4
<b>25</b>	25.4	9.52	2.4


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated								PVD coated												
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
	<b>CNMD 250924 HD</b>																									
	Roughing	4.0-15.0	0.55-1.50																							
	Finishing	2.0-5.0	0.40-0.80																							
	<b>CNMD 190624 HT</b>																									
	Roughing	4.0-9.0	0.35-0.90																							
	Finishing	2.0-5.0	0.40-0.80																							
	<b>250924 HT</b>																									
	Roughing	5.0-12.0	0.55-1.30																							
	Finishing	2.0-5.0	0.40-0.80																							
	<b>CNMD 190624 HY</b>																									
	Roughing	4.0-12.0	0.50-1.10																							
	Finishing	2.0-5.0	0.40-0.80																							
	<b>250924 HY</b>																									
	Roughing	4.0-15.0	0.55-1.50																							
	Finishing	2.0-5.0	0.40-0.80																							
	<b>CNMD 250924 HZ</b>																									
	Roughing	4.0-15.0	0.55-1.50																							
	Finishing	2.0-5.0	0.40-0.80																							



A69, A71

●: Standard items

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.4-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	4.76	0.4-1.6
<b>19</b>	19.05	6.35	0.4-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermert		CVD coated										PVD coated								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020
 Medium	<b>CNMG 090404</b>	0.5-3.0	0.10-0.45			●	●																	
	<b>090408</b>	0.5-3.0	0.10-0.50			●	●																	
	<b>090412</b>	0.5-3.0	0.10-0.55			●	●																	
 Medium	<b>CNMG 120404</b>	1.0-5.0	0.17-0.45			●	●		●	●	●		●				●							●
	<b>120408</b>	1.5-5.0	0.23-0.60			●	●	●	●	●	●		●				●	●						
	<b>120412</b>	2.0-5.0	0.25-0.60			●	●		●	●			●											
	<b>120416</b>	2.5-5.0	0.27-0.60						●	●														
	<b>160604</b>	2.0-6.5	0.20-0.45								●													
	<b>160608</b>	2.0-6.5	0.25-0.60							●	●			●										
	<b>160612</b>	2.0-6.5	0.27-0.60								●													
	<b>160616</b>	2.0-6.5	0.29-0.60								●													
	<b>190604</b>	3.0-8.0	0.20-0.45							●	●						●							
	<b>190608</b>	3.0-8.0	0.25-0.60					●	●	●	●	●			●									
	<b>190612</b>	3.0-8.0	0.30-0.60					●	●	●	●	●			●	●								
<b>190616</b>	3.0-8.0	0.35-0.70							●	●	●			●										
 Finishing	<b>CNMG 090404 EA</b>	0.20-1.5	0.05-0.30											●	●	●		●	●					
	<b>090408 EA</b>	0.30-1.5	0.07-0.40											●	●	●		●	●					
 Finishing	<b>CNMG 120404 EA</b>	0.15-1.5	0.05-0.30											●	●	●		●	●	●	●			
	<b>120408 EA</b>	0.15-1.5	0.07-0.40											●	●	●		●	●	●	●			

A55, A69-A71, A86,  
A120-A122, A176, A178, A199,  
A208, A214, A237-A239, A253

● : Standard items



## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.8-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	6.35	0.8-1.2
<b>19</b>	19.05	6.35	0.8-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated												
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT7100	TT15080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
Medium	<b>CNMG 090408 EM</b>	0.5-3.0	0.13-0.40																							
	<b>090412 EM</b>	0.7-3.0	0.15-0.40																							
Medium	<b>CNMG 120404 EM</b>	0.5-5.0	0.11-0.50																							
	<b>120408 EM</b>	0.5-5.0	0.13-0.50																							
	<b>120412 EM</b>	0.5-5.0	0.15-0.55																							
	<b>120416 EM</b>	0.5-5.0	0.17-0.60																							
	<b>160608 EM</b>	0.5-6.5	0.13-0.50																							
	<b>160612 EM</b>	0.5-6.5	0.15-0.55																							
	<b>190608 EM</b>	0.5-8.0	0.13-0.50																							
	<b>190612 EM</b>	0.5-8.0	0.15-0.55																							
Roughing	<b>CNMG 120408 ET</b>	1.2-5.5	0.17-0.55																							
	<b>120412 ET</b>	1.2-5.5	0.20-0.60																							
	<b>160608 ET</b>	2.5-7.0	0.20-0.60																							
	<b>160612 ET</b>	2.5-7.0	0.25-0.60																							
	<b>190608 ET</b>	3.0-9.0	0.20-0.60																							
	<b>190612 ET</b>	3.0-9.0	0.25-0.60																							
	<b>190616 ET</b>	3.0-9.0	0.30-0.65																							
Finishing	<b>CNMG 120404 FA</b>	0.2-2.0	0.05-0.20																							
	<b>120408 FA</b>	0.3-2.0	0.05-0.25																							
Finishing	<b>CNMG 120404 FC</b>	0.2-2.5	0.05-0.30																							
	<b>120408 FC</b>	0.3-2.5	0.08-0.35																							
	<b>120412 FC</b>	0.3-2.5	0.10-0.40																							



A55, A69-A71, A86,  
A120-A122, A176, A178, A199,  
A208, A214, A237-A239, A253

●: Standard items

## Negative 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.2-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	6.35	1.2-1.6
<b>19</b>	19.05	6.35	1.2-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated				K10								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9235	TT15100	TT17100		TT5080	TT8020	TT9080	TT3010	TT3020	TT9020		
	<b>CNMG 090404 FG</b>	0.2-2.0	0.07-0.30																							
	<b>090408 FG</b>	0.5-2.0	0.10-0.35							●	●					●										
	<b>090412 FG</b>	0.5-2.0	0.15-0.40								●	●				●										
Finishing																										
	<b>CNMG 120404 FG</b>	0.2-2.5	0.05-0.30	●	●											●										
	<b>120408 FG</b>	0.3-2.5	0.08-0.35	●	●											●										
Finishing																										
	<b>CNMG 120404 FLP</b>	0.2-2.0	0.08-0.30									●	●													
	<b>120408 FLP</b>	0.3-2.0	0.10-0.30										●	●												
Finishing																										
	<b>CNMG 090404 FM</b>	0.25-2.0	0.07-0.30	●	●						●	●	●	●		●										
	<b>090408 FM</b>	0.3-2.0	0.10-0.35	●	●							●	●	●		●										
	<b>090412 FM</b>	0.35-2.0	0.15-0.40										●	●	●		●									
Finishing																										
	<b>CNMG 090402 FS</b>	0.2-1.5	0.05-0.25	●	●							●	●													
	<b>090404 FS</b>	0.25-1.5	0.07-0.30	●	●								●	●												
	<b>090408 FS</b>	0.5-1.5	0.10-0.30	●	●								●	●												
Finishing																										
	<b>CNMG 090404 FT</b>	0.4-3.0	0.07-0.30										●	●	●		●									
	<b>090408 FT</b>	0.5-3.0	0.10-0.40											●	●	●		●								
	<b>090412 FT</b>	0.6-3.0	0.15-0.50												●	●	●		●							
Finishing																										
	<b>CNMG 120408 KT</b>	0.38-7.0	0.19-0.53										●	●	●											
	<b>120412 KT</b>	0.50-7.0	0.25-0.70											●	●	●										
	<b>120416 KT</b>	0.75-7.0	0.28-0.85												●	●	●									
	<b>160612 KT</b>	0.8-9.0	0.25-0.75												●	●										
	<b>160616 KT</b>	1.0-9.0	0.30-0.85												●	●										
	<b>190612 KT</b>	1.0-14.0	0.25-0.75													●	●									
Roughing	<b>190616 KT</b>	1.5-14.0	0.30-0.85												●	●										

A55, A69-A71, A86,  
 A120-A122, A176, A178, A199,  
 A208, A214, A237-A239, A253

● : Standard items

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.4-1.2
<b>12</b>	12.7	4.76	0.4-1.2
<b>16</b>	15.88	6.35	1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9235	TT15100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
	<b>CNMG 120404 MC</b>	0.5-3.5	0.10-0.30					●	●	●					●	●		●						
	<b>120408 MC</b>	0.7-3.5	0.12-0.35							●	●				●									
	<b>120412 MC</b>	0.7-3.5	0.15-0.40							●														
Medium																								
	<b>CNMG 120408 MGP</b>	0.5-5.0	0.15-0.55							●	●													
	<b>120412 MGP</b>	0.6-5.0	0.17-0.55							●	●													
Medium																								
	<b>CNMG 120408 MGS</b>	1.0-4.0	0.15-0.40			●													●	●		●		
	<b>120412 MGS</b>	1.5-4.0	0.17-0.50			●														●	●		●	
Medium																								
	<b>CNMG 090404 MK</b>	0.7-3.0	0.17-0.40											●	●		●	●						
	<b>090408 MK</b>	1.0-3.0	0.20-0.50											●	●		●	●	●	●	●			
	<b>090412 MK</b>	1.2-3.0	0.23-0.50											●	●		●	●						
Medium																								
	<b>CNMG 120404 ML</b>	0.8-3.5	0.10-0.30								●	●	●	●	●		●	●					●	
	<b>120408 ML</b>	1.0-3.5	0.12-0.35								●	●	●	●	●		●	●	●				●	
	<b>120412 ML</b>	1.3-3.5	0.15-0.35												●		●							●
Medium																								
	<b>CNMG 120408 MLP</b>	0.5-3.5	0.10-0.40							●	●	●												
	<b>120412 MLP</b>	0.6-3.5	0.15-0.50							●	●	●												
Medium																								
	<b>CNMG 090404 MM</b>	0.4-3.0	0.15-0.45								●	●	●	●	●	●		●						
	<b>090408 MM</b>	0.5-3.0	0.20-0.50								●	●	●	●	●	●		●						
	<b>090412 MM</b>	0.7-3.0	0.23-0.50								●	●	●	●	●	●		●						
Medium																								
	<b>CNMG 120404 MP</b>	0.8-4.0	0.10-0.30								●	●	●	●	●		●	●						
	<b>120408 MP</b>	1.0-4.0	0.12-0.40								●	●	●	●	●	●		●	●					
	<b>120412 MP</b>	1.5-4.0	0.15-0.50								●	●	●	●	●		●	●						
	<b>160612 MP</b> ✓	2.5-6.0	0.15-0.50									●												
Type B Medium																								

A55, A69-A71, A86,  
A120-A122, A176, A178, A199,  
A208, A214, A237-A239, A253






● ✓ Marked: Type B chip breaker


●: Standard items

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.4-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	6.35	0.8-1.6
<b>19</b>	19.05	6.35	0.8-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																				
				Cermet		CVD coated								PVD coated				K10						
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT18105B	TT18115B	TT18125B	TT18135B	TT9215	TT9225	TT15100	TT7100		TT15080	TT18020	TT19080	TT13010	TT13020	TT19020
 Medium	<b>CNMG 090404 MT</b>	0.8-3.0	0.10-0.35							●	●	●	●			●								
	<b>090408 MT</b>	1.0-3.0	0.15-0.45							●	●	●	●			●		●		●				
	<b>090412 MT</b>	1.2-3.0	0.20-0.55							●	●	●	●			●								
 <b>Type B</b> Medium	<b>CNMG 120404 MT</b>	1.0-5.0	0.15-0.40	●		●	●	●		●	●	●	●			●		●	●					
	<b>120408 MT</b>	1.2-5.0	0.17-0.55	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
	<b>120412 MT</b>	1.5-5.0	0.20-0.55			●	●			●	●	●	●	●	●	●	●	●	●	●	●			
	<b>160608 MT</b> ✓	2.0-6.5	0.20-0.55				●				●													
	<b>160612 MT</b> ✓	2.0-6.5	0.25-0.55				●				●	●				●		●	●					
	<b>160616 MT</b> ✓	2.0-6.5	0.30-0.55								●								●	●				
	<b>190608 MT</b>	3.0-8.0	0.23-0.55				●				●	●	●	●	●	●	●	●	●	●	●			
	<b>190612 MT</b>	3.0-8.0	0.25-0.55								●	●	●	●	●	●	●	●	●	●	●			
	<b>190616 MT</b> ✓	3.0-8.0	0.30-0.55								●													
 Medium	<b>CNMG 090404 PC</b>	0.4-3.0	0.10-0.30							●	●	●	●			●					●			
	<b>090408 PC</b>	0.5-3.0	0.15-0.40							●	●	●	●			●					●			
	<b>090412 PC</b>	0.6-3.0	0.18-0.50							●	●	●	●			●					●			
 Medium	<b>CNMG 120404 PC</b>	0.4-5.0	0.10-0.40							●	●	●	●	●	●	●								
	<b>120408 PC</b>	0.5-5.0	0.15-0.50							●	●	●	●	●	●	●					●			
	<b>120412 PC</b>	0.6-5.0	0.17-0.55							●	●	●	●	●	●	●					●			
	<b>120416 PC</b>	0.8-5.0	0.20-0.60							●	●	●	●			●					●			
	<b>160608 PC</b>	2.0-6.5	0.20-0.55							●	●													
	<b>160612 PC</b>	2.0-6.5	0.25-0.55							●	●													
	<b>160616 PC</b>	2.0-6.5	0.30-0.55							●	●													
	<b>190608 PC</b>	3.0-8.0	0.23-0.55							●	●													
	<b>190612 PC</b>	3.0-8.0	0.25-0.55							●	●													
	<b>190616 PC</b>	3.0-8.0	0.30-0.55							●														
 Roughing	<b>CNMG 120408 RGP</b>	2.5-6.0	0.25-0.70							●	●													
	<b>120412 RGP</b>	2.5-6.0	0.25-0.70							●	●													
	<b>120416 RGP</b>	2.5-6.0	0.30-0.70							●	●													
	<b>190616 RGP</b>	3.0-9.0	0.30-0.85							●	●													


 A55, A69-A71, A86,  
 A120-A122, A176, A178, A199,  
 A208, A214, A237-A239, A253

● ✓ Marked: Type B chip breaker

● : Standard items

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.4-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	6.35	1.2-1.6
<b>19</b>	19.05	6.35	0.8-1.6
<b>25</b>	25.4	9.52	2.4

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
 Type B Roughing	<b>CNMG 120408 RT</b>	2.5-6.0	0.25-0.70			•	•	•	•	•	•	•	•	•	•	•	•	•								
	<b>120412 RT</b> ✓	2.5-6.0	0.25-0.70			•	•	•	•	•	•	•	•	•	•	•	•	•								
	<b>120416 RT</b>	2.5-6.0	0.30-0.70					•	•	•																
	<b>160612 RT</b>	3.0-7.0	0.25-0.70					•	•	•	•					•	•	•								
	<b>160616 RT</b>	3.0-7.0	0.30-0.85					•	•	•	•															
	<b>190608 RT</b>	3.0-9.0	0.25-0.70							•	•															
	<b>190612 RT</b>	3.0-9.0	0.25-0.70					•	•	•	•	•			•	•	•	•								
	<b>190616 RT</b>	3.0-9.0	0.30-0.85					•	•	•	•	•				•	•	•			•					
	<b>250924 RT</b>	5.0-12.0	0.45-1.00							•	•						•									
 Finishing	<b>CNMG 120404 SF</b>	0.5-1.5	0.08-0.25																							
	<b>120408 SF</b>	0.7-1.5	0.10-0.30																							
 Finishing	<b>CNMG 090404 WA</b>	0.25-2.5	0.08-0.25					•	•	•	•					•										
	<b>090408 WA</b>	0.25-3.0	0.10-0.40					•	•	•	•					•										
	<b>090412 WA</b>	0.4-3.0	0.20-0.50					•	•	•	•					•										
 Finishing	<b>CNMG 120404 WS</b>	0.5-2.0	0.05-0.35																							
 Medium	<b>CNMG 120408 WT</b>	1.0-5.0	0.15-0.60					•	•	•	•					•										
	<b>120412 WT</b>	1.0-5.0	0.20-0.80														•									


- A55, A69-A71, A86,
- A120-A122, A176, A178, A199,
- A208, A214, A237-A239, A253

• ✓ Marked: Type B chip breaker





•: Standard items




## Negative 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>19</b>	19.05	6.35	1.2-2.4
<b>25</b>	25.4	7.94-9.52	2.4-3.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																							
				Cermet		CVD coated										PVD coated											
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	K10		
 Roughing	<b>CNMM 250924 EH</b>	2.5-15.0	0.45-1.20												●	●	●										
 Roughing	<b>CNMM 190612 HT</b>	4.0-9.0	0.35-0.90								●						●										
	<b>190616 HT</b>	4.0-9.0	0.45-1.00								●	●															
	<b>190624 HT</b>	4.0-9.0	0.55-1.20								●	●					●										
	<b>250724 HT</b>	5.0-12.0	0.55-1.30														●	●									
	<b>250924 HT</b>	5.0-12.0	0.55-1.30														●	●									
	<b>250932 HT</b>	5.0-13.0	0.65-1.30														●	●									
 Roughing	<b>CNMM 190624 HY</b>	4.0-12.0	0.50-1.10								●	●															
	<b>250924 HY</b>	4.0-15.0	0.55-1.50								●	●	●														
 Roughing	<b>CNMM 250924 HZ</b>	4.0-15.0	0.55-1.50								●	●															



● : Standard items

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	7.0	3.18	0.4-0.8
<b>12</b>	12.7	4.76-5.56	0.8-1.2
<b>16</b>	15.88	6.35-7.94	0.8-2.4
<b>19</b>	19.05	6.35	0.8-2.4
<b>25</b>	25.4	7.94-9.52	2.4


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermet		CVD coated						PVD coated				K10										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225		TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	
 Roughing	<b>CNMM 120408 RH</b>	2.5-6.0	0.30-0.70								●	●					●									
	<b>120412 RH</b>	2.5-6.0	0.30-0.80								●	●					●									
	<b>160608 RH</b>	3.0-8.0	0.30-0.70									●										●				
	<b>160612 RH</b>	3.0-8.0	0.30-0.80									●	●					●								
	<b>160616 RH</b>	4.0-8.0	0.45-1.00									●	●					●								
	<b>190608 RH *</b>	3.0-9.0	0.30-0.70																							
	<b>190612 RH</b>	4.0-9.0	0.35-0.80									●	●					●	●							
	<b>190616 RH</b>	4.0-9.0	0.45-1.00									●	●		●			●								
	<b>190624 RH</b>	4.0-9.0	0.55-1.20									●	●					●								
	<b>250924 RH *</b>	5.0-12.0	0.55-1.20										●													
 Roughing	<b>CNMM 120408 RX</b>	0.7-7.0	0.20-0.55								●	●														
	<b>120412 RX</b>	1.0-7.0	0.25-0.70								●	●														
	<b>160612 RX</b>	1.0-9.0	0.25-0.70								●							●								
	<b>160616 RX</b>	1.5-9.0	0.30-0.90								●	●	●		●	●										
	<b>160624 RX</b>	2.0-9.0	0.35-1.20								●	●														
	<b>190608 RX</b>	0.7-10.0	0.20-0.55									●														
	<b>190612 RX</b>	1.0-10.0	0.25-0.70									●	●													
	<b>190616 RX</b>	1.5-10.0	0.30-0.90									●	●													
	<b>190624 RX</b>	2.0-10.0	0.35-1.10									●	●													
	<b>250724 RX</b>	2.0-12.0	0.35-1.20									●														
<b>250924 RX</b>	2.0-12.0	0.35-1.20									●															
 Finishing	<b>CNMX 070304 FGP</b>	0.3-2.0	0.05-0.25	●							●	●					●					●				
	<b>070308 FGP</b>	0.4-2.0	0.08-0.25	●							●	●					●					●				

A69-A71, A85,  
 A120, A121, A178,  
 A208, A214, A237-A239, A256

● \* Marked: Chip breaker shape is not the same as shown in the catalogue

● : Standard items

## Negative 55° rhombic inserts

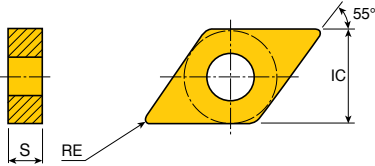

Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	7.0	3.18	0.1-0.4
<b>13</b>	11.11	5.56	0.1-1.2
<b>15</b>	12.7	4.76-6.35	0.1-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermet		CVD coated							PVD coated					K10								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100		TT7100	TT5080	TT3010	TT3020	TT9020	TT4410	TT4430	
Finishing For Swiss	<b>DNGG 130501M FU-F</b>	0.2-2.5	0.03-0.12																					●	●	
	<b>130502M FU-F</b>	0.2-2.5	0.04-0.12																						●	●
	<b>130504M FU-F</b>	0.4-2.5	0.05-0.12																							●
Medium	<b>DNGG 130501 ML</b>	0.1-1.0	0.03-0.10																●							●
	<b>130502 ML</b>	0.2-1.2	0.05-0.15																●							●
	<b>130504 ML</b>	0.5-1.5	0.05-0.20																●							●
	<b>130508 ML</b>	0.5-1.5	0.08-0.25																●							●
Medium	<b>DNGG 150401 ML</b>	0.1-1.0	0.03-0.10																●							●
	<b>150402 ML</b>	0.2-1.2	0.05-0.15																●							●
	<b>150404 ML</b>	0.8-3.5	0.10-0.30																●							●
	<b>150408 ML</b>	1.0-3.5	0.12-0.35																●							●
Finishing For Swiss	<b>DNGX 080301M SM-F</b>	0.1-1.0	0.02-0.10											●									●		●	
	<b>080302M SM-F</b>	0.2-1.2	0.02-0.12																				●		●	
	<b>080304M SM-F</b>	0.2-1.5	0.02-0.15																				●		●	
Roughing	<b>DNMA 150408</b>	0.8-4.0	0.15-0.65				●	●																		
	<b>150608</b>	0.8-4.0	0.15-0.65				●	●																		
	<b>150412</b>	1.2-4.0	0.15-0.65				●	●																		
	<b>150612</b>	1.2-4.0	0.15-0.65					●																		
Medium	<b>DNMG 130504</b>	0.5-3.5	0.10-0.45				●	●																		
	<b>130508</b>	0.5-3.5	0.10-0.50				●	●												●	●					
	<b>130512</b>	0.5-3.5	0.10-0.55				●	●																		
Medium	<b>DNMG 150404</b>	1.0-4.0	0.17-0.45				●					●														
	<b>150604</b>	1.0-4.0	0.17-0.45				●	●				●	●				●									
	<b>150408</b>	1.5-4.0	0.17-0.55				●	●				●	●													
	<b>150608</b>	1.5-4.0	0.17-0.55				●	●	●			●	●	●				●								●
	<b>150412</b>	1.5-4.0	0.25-0.55				●					●														
	<b>150612</b>	1.5-4.0	0.25-0.55				●		●			●	●					●								
	<b>150416</b>	2.5-4.0	0.25-0.65												●											
<b>150616</b>	2.5-4.0	0.25-0.65										●														

A56, A57, A63, A64, A72, A73, A89, A93,  
A115, A123, A124, A167, A176, A178,  
A200, A209, A216-A218, A240, A241, A254, A258


● : Standard items







## Negative 55° rhombic inserts

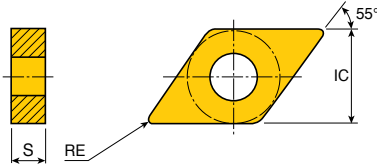

Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	11.11	5.56	0.4-1.2
<b>15</b>	12.7	4.76-6.35	0.4-1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated												
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10		
Medium	<b>DNMG 150604 MC</b>	0.5-3.5	0.10-0.30							●	●	●			●											
	<b>150408 MC</b>	0.7-3.5	0.12-0.35							●	●	●														
	<b>150608 MC</b>	0.7-3.5	0.12-0.35								●	●	●		●	●	●									
	<b>150412 MC</b>	1.0-3.5	0.15-0.35								●				●											
	<b>150612 MC</b>	1.0-3.5	0.15-0.35								●				●											
Medium	<b>DNMG 150608 MGP</b>	0.5-4.0	0.15-0.50								●	●														
	<b>150612 MGP</b>	0.6-4.0	0.17-0.55								●	●														
Medium	<b>DNMG 150408 MGS</b>	1.0-4.0	0.15-0.40			●														●	●		●			
	<b>150608 MGS</b>	1.0-4.0	0.15-0.40			●														●	●		●			
	<b>150612 MGS</b>	1.0-4.0	0.17-0.40			●														●	●		●			
Medium	<b>DNMG 130504 MK</b>	0.7-4.0	0.17-0.40											●	●		●	●								
	<b>130508 MK</b>	1.0-4.0	0.20-0.45											●	●		●	●	●	●						
	<b>130512 MK</b>	1.2-4.0	0.23-0.50											●	●		●	●								
Medium	<b>DNMG 150404 ML</b>	0.8-3.5	0.10-0.30								●				●		●								●	
	<b>150604 ML</b>	0.8-3.5	0.10-0.30								●	●			●		●								●	
	<b>150408 ML</b>	1.0-3.5	0.12-0.35								●				●		●								●	
	<b>150608 ML</b>	1.0-3.5	0.12-0.35								●	●		●	●	●	●	●							●	
Medium	<b>DNMG 150608 MLP</b>	0.3-3.5	0.10-0.40								●	●														
	<b>150612 MLP</b>	0.35-3.5	0.15-0.50								●	●														
Medium	<b>DNMG 130504 MM</b>	0.4-4.0	0.15-0.45											●	●		●	●								
	<b>130508 MM</b>	0.5-4.0	0.20-0.50											●	●	●	●	●	●							
	<b>130512 MM</b>	0.7-4.0	0.23-0.50											●	●	●	●	●	●							

A56, A57, A63, A64, A72, A73, A115,  
 A123-A126, A167, A176, A178, A200-A202,  
 A209, A240, A241, A254, A258

●: Standard items



## Negative 55° rhombic inserts

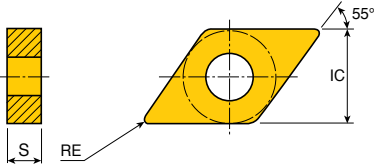

Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	9.52	4.76	0.8-1.2
<b>13</b>	11.11	5.56	0.4-1.2
<b>15</b>	12.7	4.76-6.35	0.4-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermat		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
 Type B Medium	<b>DNMG 150404 MP</b>	0.8-4.0	0.10-0.30								•				•		•		•							
	<b>150604 MP</b>	0.8-4.0	0.10-0.30								•	•			•		•		•		•					
	<b>150408 MP</b>	1.0-4.0	0.12-0.40								•						•		•		•	•				
	<b>150608 MP</b>	1.0-4.0	0.12-0.40								•	•				•	•		•		•	•	•			
	<b>150612 MP</b> ✓	1.0-4.0	0.15-0.40								•				•	•	•		•		•					
 Medium	<b>DNMG 130504 MT</b>	0.8-4.0	0.10-0.35								•	•	•					•								
	<b>130508 MT</b>	1.0-4.0	0.15-0.45								•	•	•					•								
	<b>130512 MT</b>	1.2-4.0	0.20-0.55								•	•	•					•								
 Medium	<b>DNMG 110408 MT</b> #	1.0-3.0	0.17-0.40	•		•	•				•	•						•		•						
	<b>110412 MT</b> #	1.0-3.0	0.20-0.45			•	•				•															
	<b>150404 MT</b>	0.8-4.0	0.15-0.40	•			•	•			•	•							•							
	<b>150604 MT</b>	0.8-4.0	0.15-0.40	•		•	•	•			•	•							•		•					
	<b>150408 MT</b>	1.0-4.0	0.17-0.50	•			•	•			•	•			•	•			•		•	•				
	<b>150608 MT</b>	1.0-4.0	0.17-0.50	•		•	•	•			•	•			•	•	•		•		•	•				
	<b>150412 MT</b>	1.3-4.0	0.20-0.50					•				•								•						
<b>150612 MT</b>	1.3-4.0	0.20-0.50						•	•	•	•								•		•					
 Medium	<b>DNMG 130504 PC</b>	0.4-3.5	0.10-0.30								•	•	•					•								
	<b>130508 PC</b>	0.5-3.5	0.15-0.40								•	•	•						•							
	<b>130512 PC</b>	0.6-3.5	0.18-0.50								•	•	•						•							
 Medium	<b>DNMG 110408 PC</b> #	0.5-3.0	0.17-0.40								•	•	•													
	<b>150404 PC</b>	0.4-4.0	0.10-0.40								•	•														
	<b>150604 PC</b>	0.4-4.0	0.10-0.40								•	•			•	•			•							
	<b>150408 PC</b>	0.5-4.0	0.15-0.50								•	•														
	<b>150608 PC</b>	0.5-4.0	0.15-0.50								•	•			•	•	•			•						
	<b>150412 PC</b>	0.6-4.0	0.17-0.55								•	•								•						
	<b>150612 PC</b>	0.6-4.0	0.17-0.55								•	•								•						
 Roughing	<b>DNMG 150408 RT</b>	2.0-4.0	0.25-0.65					•	•	•	•								•							
	<b>150608 RT</b>	2.0-4.0	0.25-0.65					•	•	•	•									•						
	<b>150412 RT</b>	2.5-4.0	0.25-0.65						•			•														
	<b>150612 RT</b>	2.5-4.0	0.25-0.65						•	•	•									•						
	<b>150616 RT</b>	2.5-5.5	0.25-0.70									•	•								•					

A56, A57, A63, A64, A72, A73, A89, A93, A115,  
 A123-A126, A167, A176, A178, A200-A202,  
 A209, A216-A218, A240, A241, A254, A258

- ✓ Marked: Type B chip breaker
- # Marked: Insert with screw hole
- : Standard items



## Negative 120° hexagonal inserts



Size	Dimension (mm)		
	IC	S	RE
<b>05</b>	12.7	4.76	0.8
<b>10</b>	19.05	6.35	1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated			K10								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235		TT15100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
 Medium	<b>HNMG 050408 GU</b>	0.5-3.5	0.15-0.60				●	●		●			●												
	<b>100612 GU</b>	1.0-5.0	0.25-0.70				●	●		●															
 Medium	<b>HNMG 050408 SU</b>	0.5-3.5	0.15-0.50										●		●		●								
	<b>100612 SU</b>	1.0-5.0	0.25-0.70														●								




A127, A242

● : Standard items

# KNUX

## Negative 55° rhombic inserts

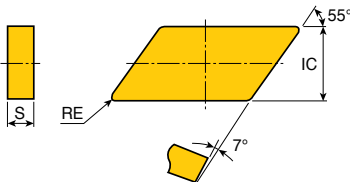

Size	Dimension (mm)		
	IC	S	RE
<b>16</b>	9.52	4.76	0.5-1.0

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated			K10									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235		TT15100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	
 Right hand Medium	<b>KNUX 160405 L11</b>	1.5-5.0	0.15-0.35							●	●		●	●												●
	<b>160405 R11</b>	1.5-5.0	0.15-0.35				●			●	●		●	●		●										
	<b>160410 L11</b>	2.0-5.0	0.21-0.45							●	●		●	●												
	<b>160410 R11</b>	2.0-5.0	0.21-0.45							●	●		●	●												
 Right hand Medium	<b>KNUX 160405 L12</b>	2.0-5.0	0.24-0.50							●	●		●	●												
	<b>160405 R12</b>	2.0-5.0	0.24-0.50							●	●		●	●												
	<b>160410 L12</b>	2.5-6.0	0.30-0.60							●	●		●	●												
	<b>160410 R12</b>	2.5-6.0	0.30-0.60							●	●		●	●												



A51, A196


● : Standard items







## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.8-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>15</b>	15.88	6.35	0.8-1.6
<b>19</b>	19.05	6.35	0.4-1.6
<b>25</b>	25.4	7.94-9.52	1.6-2.4


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet		CVD coated								PVD coated				K10							
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100		TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
 Medium	<b>SNMG 090408</b>	0.5-3.0	0.10-0.50				●	●																	
	<b>090412</b>	0.5-3.0	0.10-0.55				●	●																	
 Medium	<b>SNMG 120404</b>	1.0-5.0	0.17-0.45							●	●					●									
	<b>120408</b>	1.5-5.0	0.23-0.60				●	●	●	●	●	●				●									
	<b>120412</b>	2.0-5.0	0.25-0.60					●			●														
	<b>120416</b>	2.0-5.0	0.35-0.70								●						●								
	<b>150608</b>	1.5-6.0	0.25-0.60								●						●								
	<b>150612</b>	2.0-6.0	0.25-0.60								●														
	<b>150616</b>	2.0-6.0	0.35-0.70								●						●								
	<b>190604</b>	3.0-8.0	0.17-0.45									●													
	<b>190608</b>	3.0-8.0	0.25-0.60					●			●	●								●					
	<b>190612</b>	3.0-8.0	0.30-0.60					●	●		●	●	●				●								
	<b>190616</b>	3.0-8.0	0.35-0.70								●	●	●				●								
	<b>250716</b>	4.0-12.0	0.35-0.70								●	●					●								
	<b>250724</b>	5.0-12.0	0.50-1.00								●	●					●								
<b>250924</b>	5.0-12.0	0.50-1.00									●														
 Finishing	<b>SNMG 120404 EA</b>	0.1-1.5	0.05-0.20												●	●			●						
	<b>120408 EA</b>	0.1-1.5	0.10-0.40												●	●			●						
 Medium	<b>SNMG 090408 EM</b>	0.5-3.0	0.13-0.40																●						
	<b>090412 EM</b>	0.7-3.0	0.15-0.40																		●				

● : Standard items



A77, A78, A128,  
A129, A177, A179,  
A210, A243

## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.8-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>15</b>	15.88	6.35	1.2-1.6
<b>19</b>	19.05	6.35	0.8-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	CVD coated													K10								
				Cermet			CVD coated							PVD coated											
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	
Medium	<b>SNMG 120408 EM</b>	0.8-5.0	0.13-0.50											●	●	●			●		●				
	<b>120412 EM</b>	0.8-5.0	0.15-0.55												●	●	●			●					
	<b>150612 EM</b>	0.8-6.5	0.15-0.55												●	●	●			●	●				
	<b>150616 EM</b>	0.8-6.5	0.17-0.60												●	●	●			●	●				
	<b>190612 EM</b>	0.8-8.0	0.15-0.55												●	●	●			●					
	<b>190616 EM</b>	0.8-8.0	0.17-0.60											●	●	●			●						
Roughing	<b>SNMG 120408 ET</b>	2.0-7.0	0.25-0.70											●	●	●			●			●	●		
	<b>120412 ET</b>	2.0-7.0	0.30-0.70											●	●	●			●			●	●		
	<b>190608 ET</b>	3.0-9.0	0.30-0.75											●	●	●			●	●					
	<b>190612 ET</b>	3.0-9.0	0.35-0.75											●	●	●			●						
Finishing	<b>SNMG 120404 FC</b>	0.2-2.5	0.05-0.30										●												
	<b>120408 FC</b>	0.2-2.5	0.08-0.35										●												
	<b>120412 FC</b>	0.3-2.5	0.10-0.40										●												
Finishing	<b>SNMG 090408 FG</b>	0.5-2.0	0.10-0.35										●					●							
	<b>090412 FG</b>	0.5-2.0	0.15-0.40															●							
Finishing	<b>SNMG 120404 FG</b>	0.5-3.0	0.07-0.20			●							●						●						
	<b>120408 FG</b>	0.7-3.0	0.10-0.25	●	●								●	●											
Finishing	<b>SNMG 090412 FM</b>	0.35-2.0	0.15-0.40															●							
Roughing	<b>SNMG 120408 KT</b>	0.38-7.0	0.19-0.53				●	●	●																
	<b>120412 KT</b>	0.50-7.0	0.28-0.70				●	●	●																
	<b>120416 KT</b>	0.75-7.0	0.30-0.75				●	●																	
	<b>150612 KT</b>	0.6-8.5	0.30-0.75				●	●																	
	<b>150616 KT</b>	0.9-8.5	0.30-0.85				●	●																	
	<b>190616 KT</b>	1.3-12.0	0.30-0.85				●	●																	

● : Standard items



A77, A78, A128,  
A129, A177, A179,  
A210, A243

## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.4-1.2
<b>12</b>	12.7	4.76	0.4-1.2
<b>15</b>	15.88	6.35	0.8
<b>19</b>	19.05	6.35	1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet	CVD coated											PVD coated									
					PV3010	CT3000	TT3005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
Medium	<b>SNMG 120408 MC</b>	0.7-3.5	0.12-0.35																						
	<b>120412 MC</b>	0.7-3.5	0.15-0.40																						
Medium	<b>SNMG 120408 MGP</b>	0.5-5.0	0.15-0.50																						
Medium	<b>SNMG 120408 MGS</b>	1.0-4.0	0.15-0.40																						
	<b>120412 MGS</b>	1.3-4.0	0.17-0.40																						
	<b>190616 MGS</b>	1.5-8.0	0.17-0.60																						
Medium	<b>SNMG 090404 MK</b>	0.7-3.0	0.17-0.40																						
Medium	<b>SNMG 120408 ML</b>	1.0-3.5	0.12-0.35																						
	<b>120412 ML</b>	1.0-3.5	0.15-0.35																						
Medium	<b>SNMG 090404 MM</b>	0.4-3.0	0.15-0.45																						
	<b>090412 MM</b>	0.7-3.0	0.23-0.50																						
Medium <small>Type B</small>	<b>SNMG 120404 MP</b> ✓	0.8-4.0	0.10-0.30																						
	<b>120408 MP</b>	1.0-4.0	0.12-0.40																						
	<b>120412 MP</b>	1.3-4.0	0.15-0.40																						
	<b>150608 MP</b>	1.5-6.0	0.25-0.60																						
Medium	<b>SNMG 090404 MT</b>	0.8-3.0	0.10-0.35																						
	<b>090408 MT</b>	1.0-3.0	0.15-0.45																						

✓ Marked: Type B chip breaker

●: Standard items

A77, A78, A128,  
A129, A177, A179,  
A210, A243

## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	4.76	0.8-1.2
<b>12</b>	12.7	4.76	0.4-1.6
<b>15</b>	15.88	6.35	1.2
<b>19</b>	19.05	6.35	0.8-2.4
<b>25</b>	25.4	7.94-9.52	2.4-3.2


Insert	Designation	ap (mm)	Feed (mm/rev)	CVD coated											PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
 Type B Medium	<b>SNMG 120404 MT</b> ✓	1.0-5.0	0.12-0.40	●																					
	<b>120408 MT</b>	1.2-5.0	0.17-0.55	●		●	●	●	●			●	●	●			●	●							
	<b>120412 MT</b> ✓	1.5-5.0	0.20-0.55			●			●	●			●	●			●	●							
	<b>150612 MT</b> ✓	2.0-7.0	0.30-0.65							●	●														
	<b>190608 MT</b>	3.0-8.0	0.17-0.55							●				●											
 Medium	<b>190612 MT</b>	3.0-8.0	0.20-0.55						●				●	●	●			●							
	<b>SNMG 090408 PC</b>	0.5-3.0	0.15-0.40										●												
 Medium	<b>090412 PC</b>	0.6-3.0	0.18-0.50														●								
	<b>SNMG 120404 PC</b>	0.4-5.0	0.12-0.40																						
	<b>120408 PC</b>	0.5-5.0	0.15-0.50																						
 Type B Roughing	<b>120412 PC</b>	0.6-5.0	0.15-0.50																						
	<b>SNMG 120408 RT</b>	2.5-6.0	0.25-0.70			●	●			●	●				●										
	<b>120412 RT</b>	2.5-6.0	0.30-0.70			●	●			●	●	●			●										
	<b>120416 RT</b>	2.5-6.0	0.40-0.70							●	●	●													
	<b>150612 RT</b>	3.0-7.0	0.30-0.70				●			●															
	<b>190612 RT</b>	3.0-9.0	0.30-0.75							●	●	●			●	●			●						
	<b>190616 RT</b> ✓	3.0-9.0	0.40-0.90							●	●	●			●	●			●	●					
	<b>250724 RT</b>	5.0-12.0	0.40-1.00																						
<b>250924 RT</b>	5.0-12.0	0.40-1.00												●											
 Roughing	<b>SNMM 250924 EH</b>	2.8-18.0	0.45-1.20																						
	<b>SNMM 190612 HT</b>	4.0-9.0	0.35-0.90																						
 Roughing	<b>190616 HT</b>	4.0-9.0	0.45-1.00																						
	<b>190624 HT</b>	4.0-9.0	0.55-1.20																						
	<b>250724 HT</b>	5.0-12.0	0.55-1.30																						
	<b>250924 HT</b>	5.0-12.0	0.55-1.30																						
	<b>250932 HT</b>	5.0-13.0	0.65-1.30																						

A77, A78, A128,  
 A129, A177, A179,  
 A210, A243

● ✓ Marked: Type B chip breaker

●: Standard items

## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	4.76	0.8-1.2
<b>15</b>	15.88	6.35-7.94	1.2
<b>19</b>	19.05	6.35	0.8-2.4
<b>25</b>	25.4	7.94-9.52	1.6-2.4

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermert			CVD coated									PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT7100	TT15080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
	<b>SNMM 190624 HY</b>	4.0-12.0	0.50-1.10								●	●														
	<b>250924 HY</b>	4.0-15.0	0.55-1.50								●	●	●													
Roughing																										
	<b>SNMM 250924 HZ</b>	4.0-15.0	0.55-1.50								●	●														
Roughing																										
	<b>SNMM 120408 RH</b>	2.5-6.0	0.30-0.70										●				●									
	<b>120412 RH</b>	2.5-6.0	0.30-0.80										●				●									
	<b>150612 RH</b>	3.0-7.0	0.30-0.80										●				●									
	<b>190608 RH*</b>	3.0-9.0	0.30-0.70										●													
	<b>190612 RH</b>	4.0-9.0	0.30-0.80										●	●				●								
	<b>190616 RH</b>	4.0-9.0	0.45-1.00										●		●			●			●					
	<b>190624 RH</b>	4.0-9.0	0.55-1.20										●													
	<b>250716 RH*</b>	5.0-12.0	0.55-1.00										●													
	<b>250724 RH*</b>	5.0-12.0	0.55-1.20										●	●				●								
	<b>250924 RH*</b>	5.0-12.0	0.55-1.20										●													
	<b>SNMM 120408 RX</b>	0.7-7.0	0.20-0.55										●	●	●											
	<b>120412 RX</b>	1.0-7.0	0.25-0.70										●	●	●											
	<b>150612 RX</b>	1.0-9.0	0.25-0.70										●	●	●											
	<b>190612 RX</b>	1.0-10.0	0.25-0.70										●	●												
	<b>190616 RX</b>	1.5-10.0	0.30-0.90										●													
	<b>190624 RX</b>	2.0-10.0	0.35-1.10										●													
	<b>250724 RX</b>	2.0-12.0	0.35-1.20										●					●								
	<b>250924 RX</b>	2.0-12.0	0.35-1.20										●	●												




A77, A78, A128,  
A129, A179,  
A210, A243

\* Marked: Chip breaker shape is not the same as shown in the catalogue

●: Standard items

## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.2-1.2
<b>16</b>	9.52	4.76	0.4-1.6
<b>22</b>	12.7	4.76	0.4-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	K10	
  Left hand Medium	<b>TNGG 130402 L</b>	0.8-3.5	0.10-0.30	●																						
	<b>130402 R</b>	0.8-3.5	0.10-0.30	●																						
	<b>130404 L</b>	1.0-3.5	0.12-0.30	●																						
	<b>130404 R</b>	1.0-3.5	0.12-0.30	●																						
	<b>130408 L</b>	1.3-3.5	0.15-0.35	●																						
	<b>130408 R</b>	1.3-3.5	0.15-0.35	●																						
 Left hand Medium	<b>TNGG 160404 L</b>	1.0-3.5	0.12-0.30	●						●																
	<b>160404 R</b>	1.0-3.5	0.12-0.30	●						●				●												
	<b>160408 L</b>	1.3-3.5	0.15-0.35	●																						
	<b>160408 R</b>	1.3-3.5	0.15-0.35	●																						
	<b>220404 L</b>	1.0-5.0	0.12-0.30	●																						
	<b>220404 R</b>	1.0-5.0	0.12-0.30	●																						
	<b>220408 L</b>	1.3-5.0	0.15-0.35	●																						
	<b>220408 R</b>	1.3-5.0	0.15-0.35	●																						
 Roughing	<b>TNMA 160404</b>	1.0-4.0	0.15-0.30					●	●	●																
	<b>160408</b>	1.0-4.0	0.15-0.40					●	●	●																
	<b>160412</b>	1.5-4.5	0.20-0.50							●	●															
	<b>160416</b>	1.0-4.5	0.20-0.50					●																		
	<b>220404</b>	1.5-5.0	0.15-0.30																							
	<b>220408</b>	1.5-5.0	0.15-0.40								●	●														
	<b>220412</b>	1.5-5.0	0.20-0.50					●	●																	
	<b>220416</b>	2.0-5.0	0.20-0.61																							
  Medium	<b>TNMG 130404</b>	0.5-3.5	0.10-0.45							●	●															
	<b>130408</b>	0.5-3.5	0.10-0.50							●	●															
	<b>130412</b>	0.5-3.5	0.10-0.55							●	●															

A59, A65, A79, A80, A101, A130, A143,  
 A144, A177, A180, A203, A204, A211,  
 A222, A226, A244, A245, A248

●: Standard items



## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.4-0.8
<b>13</b>	7.94	4.76	0.4-1.2
<b>16</b>	9.52	4.76	0.4-1.2
<b>22</b>	12.7	4.76	0.4-1.6
<b>27</b>	15.88	6.35	0.8-1.6
<b>33</b>	19.05	7.94-9.52	1.6-2.4


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat	CVD coated										PVD coated											
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	K10	
	<b>TNMG 110304</b>	1.2-3.0	0.15-0.40																							
	<b>110308</b>	1.5-3.0	0.17-0.40																							
	<b>160404</b>	1.5-3.5	0.17-0.45																							
	<b>160408</b>	2.0-3.5	0.17-0.55																							
	<b>160412</b>	2.0-3.5	0.25-0.55																							
	<b>220404</b>	1.5-5.0	0.17-0.45																							
	<b>220408</b>	2.0-5.0	0.17-0.55																							
	<b>220412</b>	2.0-5.0	0.25-0.55																							
	<b>220416</b>	2.0-5.0	0.30-0.60																							
	<b>270608</b>	2.0-5.0	0.17-0.55																							
	<b>270612</b>	3.0-7.0	0.25-0.55																							
	<b>270616</b>	3.0-7.0	0.30-0.60																							
	<b>330716</b>	3.0-9.0	0.35-0.70																							
<b>330924</b>	3.0-9.0	0.40-0.80																								
	<b>TNMG 130404 EA</b>	0.2-1.5	0.05-0.30																							
	<b>130408 EA</b>	0.3-1.5	0.07-0.40																							
	<b>TNMG 160404 EA</b>	0.1-1.5	0.05-0.20																							
	<b>160408 EA</b>	0.1-1.5	0.10-0.40																							
	<b>TNMG 130408 EM</b>	0.5-3.0	0.13-0.40																							
	<b>130412 EM</b>	0.7-3.0	0.15-0.40																							
	<b>TNMG 160408 EM</b>	0.8-4.5	0.13-0.50																							
	<b>160412 EM</b>	0.8-4.5	0.15-0.55																							
	<b>220408 EM</b>	0.8-6.0	0.13-0.50																							
	<b>220412 EM</b>	0.8-6.0	0.15-0.55																							

● : Standard items



A59, A65, A79, A80, A101, A130, A143,  
A144, A177, A180, A203, A204, A211,  
A222, A226, A244, A245, A248

## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.4
<b>13</b>	7.94	4.76	0.2-1.2
<b>16</b>	9.52	4.76	0.4-1.2
<b>22</b>	12.7	4.76	0.8-1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																				
				Cemet		CVD coated											PVD coated							
				PV3010	CT3000	TT3005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
Roughing	<b>TNMG 160408 ET</b>	2.0-5.0	0.25-0.65											●	●	●		●		●				
	<b>220408 ET</b>	2.5-7.0	0.25-0.65											●	●	●		●		●				
	<b>220412 ET</b>	2.5-7.0	0.25-0.65											●	●			●		●				
Finishing	<b>TNMG 160404 FC</b>	0.2-2.5	0.05-0.30						●	●	●		●	●	●			●						
	<b>160408 FC</b>	0.2-2.5	0.08-0.35						●	●	●		●	●	●									
	<b>160412 FC</b>	0.3-2.5	0.10-0.40						●	●														
Finishing	<b>TNMG 130404 FG</b>	0.25-1.5	0.07-0.30						●	●							●							
	<b>130408 FG</b>	0.3-1.5	0.10-0.35						●	●							●							
	<b>130412 FG</b>	0.35-1.5	0.15-0.40						●	●							●							
Finishing	<b>TNMG 110304 FG</b>	0.5-1.5	0.07-0.20		●												●							
	<b>160404 FG</b>	0.5-2.0	0.07-0.20		●				●	●							●							
	<b>160408 FG</b>	0.7-2.0	0.10-0.25		●				●	●							●							
	<b>160412 FG</b>	0.7-2.0	0.13-0.30		●																			
	<b>220408 FG</b>	0.7-2.0	0.10-0.25																					
Finishing	<b>TNMG 160404 FLP</b>	0.2-2.0	0.08-0.30						●	●														
	<b>160408 FLP</b>	0.3-2.0	0.10-0.30						●	●														
Finishing	<b>TNMG 130404 FM</b>	0.25-1.5	0.07-0.30	●	●				●	●	●	●				●								
	<b>130408 FM</b>	0.3-1.5	0.10-0.35	●	●				●	●	●	●				●								
	<b>130412 FM</b>	0.35-1.5	0.15-0.40	●	●				●	●	●	●				●								
Finishing	<b>TNMG 130402 FS</b>	0.2-1.0	0.05-0.25	●	●				●	●														
	<b>130404 FS</b>	0.25-1.0	0.07-0.30	●	●				●	●														
	<b>130408 FS</b>	0.5-1.0	0.10-0.30	●	●				●	●														



A59, A65, A79, A80, A101, A130, A143,  
A144, A177, A180, A203, A204, A211,  
A222, A226, A244, A245, A248

●: Standard items

## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.4-1.2
<b>16</b>	9.52	4.76	0.4-1.2
<b>22</b>	12.7	4.76	0.4-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																							
				Cermets			CVD coated							PVD coated			K10										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235		TT15100	TT7100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020		
	<b>TNMG 160404 L-FS</b>	0.8-3.0	0.15-0.30	●									●				●										
	<b>160404 R-FS</b>	0.8-3.0	0.15-0.30	●									●				●			●							
	<b>160408 L-FS</b>	1.0-3.5	0.20-0.40											●													
	<b>160408 R-FS</b>	1.0-3.5	0.20-0.40											●				●		●							
	<b>TNMG 130404 FT</b>	0.25-2.5	0.07-0.30							●	●	●					●										
	<b>130408 FT</b>	0.3-2.5	0.10-0.40							●	●	●					●										
	<b>130412 FT</b>	0.35-2.5	0.15-0.50							●	●	●					●										
	<b>TNMG 160408 KT</b>	0.34-6.2	0.17-0.42				●	●	●																		
	<b>160412 KT</b>	0.45-6.3	0.20-0.56				●	●																			
	<b>220408 KT</b>	0.38-7.0	0.19-0.53				●	●																			
	<b>220412 KT</b>	0.5-7.0	0.25-0.70				●	●																			
	<b>TNMG 160408 MC</b>	0.7-3.5	0.17-0.40							●	●						●										
	<b>TNMG 160408 MGP</b>	0.5-4.5	0.15-0.50							●	●																
	<b>160412 MGP</b>	0.6-4.5	0.17-0.55							●	●																
	<b>TNMG 130404 MK</b>	0.7-3.0	0.17-0.40													●	●		●	●							
	<b>130408 MK</b>	1.0-3.0	0.20-0.45													●	●		●	●							
	<b>130412 MK</b>	1.2-3.0	0.23-0.50													●	●		●	●							
	<b>TNMG 160404 ML</b>	0.8-3.5	0.10-0.30							●	●						●		●	●							
	<b>160408 ML</b>	1.0-3.5	0.12-0.35							●	●	●					●		●	●							
	<b>160412 ML</b>	1.5-3.5	0.15-0.35														●										
	<b>220404 ML</b>	1.0-4.0	0.10-0.30														●								●		
	<b>220408 ML</b>	1.0-4.0	0.12-0.35									●					●									●	


● : Standard items

A59, A65, A79, A80, A101, A130, A143, A144, A177, A180, A203, A204, A211, A222, A226, A244, A245, A248





## Negative 35° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.1-0.8
<b>16</b>	9.52	4.76	0.1-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated							PVD coated											
				PV3010	CT3000	TT3005	TT7005	TT7015	TT8115B	TT8125B	TT8135B	TT9215	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	K10
Medium	<b>VNGG 160401 ML</b>	0.1-1.0	0.03-0.10																					•
	<b>160402 ML</b>	0.2-1.2	0.05-0.15											•										•
	<b>160404 ML</b>	0.8-3.0	0.10-0.27											•										•
	<b>160408 ML</b>	0.8-3.5	0.10-0.30																					
Finishing For Swiss	<b>VNGX 130401M FS-F</b>	0.2-1.0	0.03-0.12																				•	•
	<b>130402M FS-F</b>	0.2-1.0	0.04-0.12																				•	•
Medium	<b>VNGX 130401 ML</b>	0.1-1.0	0.03-0.10																					•
	<b>130402 ML</b>	0.2-1.2	0.05-0.15																					
	<b>130404 ML</b>	0.5-1.5	0.05-0.20																					
Medium	<b>VNMG 160404</b>	1.0-3.0	0.17-0.40				•	•	•				•											
	<b>160408</b>	1.5-3.0	0.17-0.50				•	•	•				•											
	<b>160412</b>	1.5-3.0	0.20-0.50				•	•	•															
Finishing	<b>VNMG 160404 EA</b>	0.1-1.5	0.05-0.20											•	•		•	•	•	•				
	<b>160408 EA</b>	0.2-2.5	0.08-0.30						•					•				•	•	•				
Medium	<b>VNMG 160408 EM</b>	0.8-3.5	0.13-0.50																					
Finishing	<b>VNMG 160408 FA</b>	0.3-2.0	0.05-0.25																					
Finishing	<b>VNMG 130404 FC #</b>	0.5-1.5	0.08-0.20																					
	<b>130408 FC #</b>	0.5-2.0	0.10-0.23																					
	<b>160404 FC</b>	0.3-2.5	0.05-0.30																					
	<b>160408 FC</b>	0.3-2.5	0.08-0.35																					




A60, A61, A66, A67,  
A106, A107, A132-A135, A180,  
A229, A231, A254

• # Marked: Insert with screw hole

•: Standard items

## Negative 35° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.4-0.8
<b>16</b>	9.52	4.76	0.4-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet		CVD coated								PVD coated			K10								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235		TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020
Finishing	<b>VNMG 130404 FG #</b>	0.5-1.5	0.08-0.20	•									•	•			•		•						
	<b>130408 FG #</b>	0.5-2.0	0.10-0.23	•									•	•											
	<b>160404 FG</b>	0.5-2.0	0.08-0.20	•	•							•	•	•		•		•		•	•				
	<b>160408 FG</b>	0.5-2.0	0.10-0.23	•	•							•	•	•				•		•					
Finishing	<b>VNMG 160404 FLP</b>	0.2-1.5	0.08-0.30										•	•											
	<b>160408 FLP</b>	0.3-1.5	0.10-0.30										•	•											
	<b>160412 FLP</b>	0.4-1.5	0.12-0.30										•	•											
Finishing	<b>VNMG 160404 FX</b>	0.2-2.0	0.05-0.20	•									•	•											
	<b>160408 FX</b>	0.2-2.0	0.07-0.20	•									•	•	•										
	<b>160412 FX</b>	0.2-2.0	0.10-0.23										•	•											
Medium	<b>VNMG 160408 MGP</b>	0.5-3.0	0.17-0.36										•	•											
 Type B Medium	<b>VNMG 130404 MT #</b>	0.8-2.5	0.15-0.36	•			•	•			•						•								
	<b>130408 MT #</b>	1.0-2.5	0.17-0.36	•		•					•	•					•								
	<b>160404 MT ✓</b>	0.8-3.0	0.15-0.36	•					•		•	•				•			•						
	<b>160408 MT</b>	1.0-2.5	0.17-0.36	•		•	•	•			•	•	•			•	•	•	•	•					
Medium	<b>VNMG 160404 PC</b>	0.4-3.0	0.15-0.36									•	•	•	•										
	<b>160408 PC</b>	0.5-3.0	0.17-0.36									•	•	•											
Medium	<b>VNMM160404 ML</b>	0.8-3.0	0.10-0.27																						•
	<b>160408 ML</b>	1.0-3.0	0.12-0.32																						•

A66, A67, A107, A132, A180, A229, A231

• ✓ Marked: Type B chip breaker  
 • # Marked: Insert with screw hole  
 • : Standard items

## Negative 35° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.2-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated											
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
Finishing	<b>VNMX 130404 FG</b>	0.5-2.0	0.08-0.20	●																					
	<b>130408 FG</b>	0.5-2.0	0.10-0.23	●																					
Finishing	<b>VNMX 130404 FM</b>	0.25-1.5	0.07-0.30	●						●	●	●	●		●			●		●					
	<b>130408 FM</b>	0.3-1.5	0.10-0.35	●						●	●	●	●		●			●		●					
Finishing	<b>VNMX 130402 FS</b>	0.2-1.0	0.05-0.20	●	●							●	●												
	<b>130404 FS</b>	0.25-1.0	0.07-0.20	●	●							●	●												
	<b>130408 FS</b>	0.5-1.0	0.10-0.23	●	●							●	●												
Finishing	<b>VNMX 130404 FX</b>	0.2-2.0	0.05-0.20	●	●							●	●												
	<b>130408 FX</b>	0.2-2.0	0.07-0.20	●	●							●	●												
Medium	<b>VNMX 130404 MK</b>	0.7-3.0	0.17-0.35												●	●			●		●				
	<b>130408 MK</b>	1.0-3.0	0.20-0.40			●									●	●			●		●	●	●		
Medium	<b>VNMX 130404 MT</b>	0.8-3.0	0.15-0.36									●	●	●	●				●		●				
	<b>130408 MT</b>	1.0-3.0	0.17-0.36					●	●			●	●	●	●				●		●				
	<b>130412 MT</b>	1.5-3.0	0.20-0.40					●	●			●	●	●	●				●		●				
Medium	<b>VNMX 130404 PC</b>	0.4-3.0	0.15-0.36									●	●	●	●				●		●				
	<b>130408 PC</b>	0.5-3.0	0.17-0.36									●	●	●	●				●		●				
	<b>130412 PC</b>	1.0-3.0	0.20-0.40									●	●	●	●				●		●				

A66, A67,  
A106, A132-A135,  
A229, A231, A254

●: Standard items

## Negative 80° trigon inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	9.52	4.76	0.4-1.2
<b>08</b>	12.7	4.76	0.4-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermat		CVD coated										PVD coated				K10					
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT7100	TT15080		TT18020	TT19080	TT13010	TT13020	TT19020
Roughing	<b>WNMA 060408</b>	1.0-4.0	0.15-0.70																						
	<b>060412</b>	1.5-4.0	0.20-0.80																						
	<b>080408</b>	1.0-5.0	0.15-0.70																						
	<b>080412</b>	1.5-5.0	0.20-0.80																						
	<b>080416</b>	1.5-5.0	0.20-0.80																						
Finishing	<b>WNMG 080404 EA</b>	0.1-1.5	0.05-0.20																						
	<b>080408 EA</b>	0.1-1.5	0.10-0.40																						
Medium	<b>WNMG 060408 EM</b>	0.8-3.0	0.13-0.50																						
	<b>060412 EM</b>	0.8-3.0	0.15-0.55																						
	<b>080404 EM</b>	0.8-4.0	0.10-0.45																						
	<b>080408 EM</b>	0.8-4.0	0.12-0.45																						
	<b>080412 EM</b>	0.8-4.0	0.12-0.45																						
Roughing	<b>WNMG 060408 ET</b>	0.8-4.0	0.15-0.50																						
	<b>060412 ET</b>	0.8-4.0	0.15-0.50																						
	<b>080408 ET</b>	0.8-4.5	0.15-0.55																						
	<b>080412 ET</b>	0.8-4.5	0.20-0.50																						
Finishing	<b>WNMG 060404 FC</b>	0.5-2.0	0.07-0.20																						
	<b>060408 FC</b>	0.5-2.0	0.10-0.25																						
	<b>080404 FC</b>	0.5-2.0	0.07-0.20																						
	<b>080408 FC</b>	0.5-2.0	0.07-0.20																						
	<b>080412 FC</b>	0.5-2.0	0.10-0.25																						
Finishing	<b>WNMG 060404 FG</b>	0.5-2.0	0.07-0.20																						
	<b>060408 FG</b>	0.7-2.0	0.10-0.25																						
	<b>080404 FG</b>	0.5-2.0	0.07-0.20																						
	<b>080408 FG</b>	0.7-2.0	0.10-0.25																						

● : Standard items










## Negative 80° trigon inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	9.52	4.76	0.4-1.2
<b>08</b>	12.7	4.76	0.8-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated										PVD coated					K10					
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020		TT19080	TT3010	TT3020	TT9020	
 Type B Medium	<b>WNMG 060404 MT</b>	1.0-3.0	0.12-0.40					●	●			●	●		●	●		●	●							
	<b>060408 MT</b>	1.2-3.0	0.15-0.45					●	●			●	●		●	●		●	●							
	<b>060412 MT</b>	1.5-3.0	0.23-0.50									●														
	<b>080404 MT</b> ✓	1.0-4.0	0.12-0.40		●			●	●			●	●		●	●			●	●						
	<b>080408 MT</b>	1.2-4.0	0.17-0.55		●			●	●			●	●		●	●			●	●						
	<b>080412 MT</b>	1.5-4.0	0.25-0.55					●	●			●	●		●	●			●	●						
	<b>080416 MT</b>	1.5-4.0	0.25-0.55									●	●													
 Medium	<b>WNMG 060408 PC</b>	0.5-4.0	0.15-0.50									●	●													
	<b>060412 PC</b>	0.6-4.0	0.17-0.50									●	●													
	<b>080408 PC</b>	0.5-4.0	0.15-0.50									●	●		●	●		●	●							
	<b>080412 PC</b>	0.6-4.0	0.17-0.50									●	●		●	●						●				
	<b>080416 PC</b>	0.8-4.0	0.20-0.50									●	●													
 Roughing	<b>WNMG 080408 RGP</b>	2.5-4.0	0.25-0.70									●	●													
	<b>080412 RGP</b>	2.5-4.0	0.25-0.70									●	●													
	<b>080416 RGP</b>	2.5-4.0	0.30-0.75									●	●													
 Roughing	<b>WNMG 080408 RT</b>	2.5-4.0	0.25-0.70					●	●			●	●	●	●	●	●									
	<b>080412 RT</b>	2.5-4.0	0.25-0.70					●	●	●		●	●		●	●										
	<b>080416 RT</b>	2.5-4.0	0.30-0.75					●				●	●													
 wiper Finishing	<b>WNMG 080408 WS</b>	0.5-2.0	0.07-0.35						●			●	●													




● ✓ Marked: Type B chip breaker      ● : Standard items







# WNUMG WNUMX



## Negative 80° trigon inserts



Size	Dimension (mm)		
	IC	S	RE
<b>04</b>	7	3.18	0.4-0.8
<b>06</b>	9.52	4.76	0.4-1.2
<b>08</b>	12.7	4.76	0.8-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
 Medium	<b>WNUMG 060408 WT</b>	0.7-3.5	0.15-0.60																						
	<b>060412 WT</b>	0.7-3.5	0.20-0.80																						
	<b>080408 WT</b>	1.0-4.0	0.15-0.60																						
	<b>080412 WT</b>	1.0-4.0	0.20-0.80																						
 Medium	<b>WNUMX 060404 EM</b>	0.4-3.0	0.10-0.35																						
	<b>060408 EM</b>	0.5-3.0	0.13-0.40																						
	<b>060412 EM</b>	0.7-3.0	0.15-0.40																						
 Finishing	<b>WNUMX 060404 FG</b>	0.2-2.0	0.07-0.30																						
 Finishing	<b>WNUMX 040304 FGP</b>	0.3-2.0	0.05-0.25																						
	<b>040308 FGP</b>	0.4-2.0	0.08-0.25																						
 Finishing	<b>WNUMX 060404 FM</b>	0.25-2.0	0.07-0.30																						
	<b>060408 FM</b>	0.3-2.0	0.10-0.35																						
	<b>060412 FM</b>	0.35-2.0	0.15-0.40																						
 Finishing	<b>WNUMX 060404 FS</b>	0.25-1.5	0.07-0.30																						
	<b>060408 FS</b>	0.5-1.5	0.10-0.30																						


●: Standard items



A62, A68, A81, A111,  
A136, A137, A205, A207,  
A234, A246, A261



## Negative 70° rhombic inserts

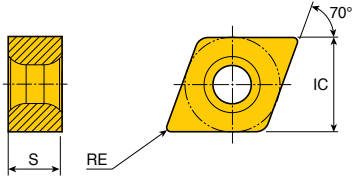

Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	8.7	4.76	0.4
<b>11</b>	11.11	5.56	0.4-1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet		CVD coated							PVD coated		K10										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215		TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
Finishing	<b>XNMG 090404 FLP</b>	0.20-1.50	0.07-0.30							●	●	●													
Finishing	<b>XNMG 110504 FGP</b>	0.25-2.00	0.07-0.30							●	●	●													
	<b>110508 FGP</b>	0.30-2.00	0.10-0.35							●	●	●													
	<b>110512 FGP</b>	0.35-2.00	0.15-0.40							●	●														
Medium	<b>XNMG 110508 MLP</b>	0.50-3.50	0.10-0.40							●	●	●													
	<b>110512 MLP</b>	0.60-3.50	0.15-0.50							●	●	●													



●: Standard items

# YNMG

## Negative 25° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	7.94	4.76	0.4-0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet		CVD coated							PVD coated		K10										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215		TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
Finishing	<b>YNMG 130404 FS</b>	0.3-1.0	0.08-0.20	●	●						●									●	●				
	<b>130408 FS</b>	0.5-1.5	0.08-0.25	●	●						●									●					



●: Standard items

## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>21</b>	12.5	9	0.8

Insert	Designation	BWT <sup>(1)</sup>		FWT <sup>(2)</sup>		CVD coated					PVD coated			K10											
		ap (mm)	Feed (mm/rev)	ap (mm)	Feed (mm/rev)	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B		TT9215	TT9225	TT9235	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020		
 Medium	<b>TNMV 210908-BM</b>	0.7-2.0	0.60-1.20	0.5-3.5	0.20-0.60						●	●													




A131

- <sup>(1)</sup> BWT: Backward turning
- <sup>(2)</sup> FWT: Forward turning

● : Standard items

# XNMV

## Negative 70° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	11.11	5.56	0.8

Insert	Designation	BWT <sup>(1)</sup>		FWT <sup>(2)</sup>		CVD coated					PVD coated			K10										
		ap (mm)	Feed (mm/rev)	ap (mm)	Feed (mm/rev)	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B		TT9215	TT9225	TT9235	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	
 Medium	<b>XNMV 110508L-BM</b>	0.5-1.8	0.50-0.80	0.5-3.5	0.10-0.40																			
	<b>110508R-BM</b>	0.5-1.8	0.50-0.80	0.5-3.5	0.10-0.40						●	●												
 Medium For Cast Iron	<b>XNMV 110508-BK</b>	0.5-1.8	0.50-0.80	0.5-3.5	0.10-0.40	●	●																	




A138-A139,  
A206, A236,  
A247, A262

- <sup>(1)</sup> BWT: Backward turning
- <sup>(2)</sup> FWT: Forward turning
- Apply L insert to L holder and R boring bar
- Apply R insert to R holder and L boring bar

● : Standard items

## Negative rhombic inserts with 80° corner angle



Size	Dimension (mm)		
	IC	S	RE
<b>14</b>	10.5	10	0.8

Insert	Designation	BWT <sup>(1)</sup>		FWT <sup>(2)</sup>		CVD coated							PVD coated										
		ap (mm)	Feed (mm/rev)	ap (mm)	Feed (mm/rev)	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
Medium	<b>ZNMV 141008-BM</b>	0.5-2.5	0.40-1.00	0.5-2.0	0.20-0.60					●	●	●											
Medium	<b>ZNMV 141008-BS</b>	0.5-2.5	0.50-1.00	1.0-2.0	0.20-0.40	●				●	●	●								●	●		




A141, A142  
A182

- <sup>(1)</sup> BWT: Backward turning
- <sup>(2)</sup> FWT: Forward turning

●: Standard items

# ZNMV Y-BF

## Negative rhombic inserts with 35° corner angle



Size	Dimension (mm)		
	IC	S	RE
<b>14</b>	10.5	10	0.8

Insert	Designation	BWT <sup>(1)</sup>		FWT <sup>(2)</sup>		CVD coated							PVD coated										
		ap (mm)	Feed (mm/rev)	ap (mm)	Feed (mm/rev)	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
Finishing	<b>ZNMV 141008Y-BF</b>	0.25-1.5	0.20-0.50	0.25-1.0	0.20-0.35	●							●	●	●								




A141, A142  
A182

- <sup>(1)</sup> BWT: Backward turning
- <sup>(2)</sup> FWT: Forward turning

●: Standard items



## Positive 7° clearance 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	6.35	2.38	0.03-0.8
<b>09</b>	9.52	3.97	0.03-0.8


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated				
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10			
  Right hand Finishing	<b>CCET 0602003 L-GF</b>	0.1-1.5	0.02-0.15															
	<b>0602003 R-GF</b>	0.1-1.5	0.02-0.15															
	<b>060201 L-GF</b>	0.2-1.5	0.02-0.15															
	<b>060201 R-GF</b>	0.2-1.5	0.02-0.15															
	<b>060202 L-GF</b>	0.3-1.5	0.03-0.17															
	<b>060202 R-GF</b>	0.3-1.5	0.03-0.17															
	<b>060204 L-GF</b>	0.3-1.5	0.05-0.20															
	<b>060204 R-GF</b>	0.3-1.5	0.05-0.20															
	<b>060208 L-GF</b>	0.4-1.5	0.07-0.22															
	<b>060208 R-GF</b>	0.4-1.5	0.07-0.22															
	<b>09T3003 L-GF</b>	0.1-2.5	0.02-0.15															
	<b>09T3003 R-GF</b>	0.1-2.5	0.02-0.15															
	<b>09T301 L-GF</b>	0.2-2.5	0.02-0.15															
	<b>09T301 R-GF</b>	0.2-2.5	0.02-0.15															
	<b>09T302 L-GF</b>	0.3-2.5	0.03-0.17															
	<b>09T302 R-GF</b>	0.3-2.5	0.03-0.17															
	<b>09T304 L-GF</b>	0.3-2.5	0.05-0.20															
	<b>09T304 R-GF</b>	0.3-2.5	0.05-0.20															
<b>09T308 L-GF</b>	0.4-2.5	0.07-0.22																
<b>09T308 R-GF</b>	0.4-2.5	0.07-0.22																
  Right hand Finishing	<b>CCET 0602003 L-GW*</b>	0.1-1.5	0.02-0.15															
	<b>0602003 R-GW*</b>	0.1-1.5	0.02-0.15															
	<b>09T3003 L-GW*</b>	0.1-2.5	0.02-0.15															
	<b>09T3003 R-GW*</b>	0.1-2.5	0.02-0.15															

A82-A84,  
 A113, A183,  
 A212, A213, A255

\* Marked: Wiper inserts should be applied to  
 CLCR/L...

●: Standard items


## Positive 7° clearance 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>03</b>	3.5	1.4	0.03-0.4
<b>04</b>	4.3	1.8	0.03-0.4
<b>06</b>	6.35	2.38	0.1-0.4
<b>09</b>	9.52	3.97	0.1-0.8
<b>12</b>	12.7	4.76	0.2-0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated				
				PV3010	CT3000	TT5080	TT18020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10			
  Right hand Finishing	<b>CCGT 0301003 L-FF</b>	0.05-0.3	0.03-0.10															
	<b>0301003 R-FF</b>	0.05-0.3	0.03-0.10															
	<b>030101 L-FF</b>	0.08-0.4	0.03-0.12															
	<b>030101 R-FF</b>	0.08-0.4	0.03-0.12															
	<b>030102 L-FF</b>	0.1-0.4	0.03-0.15															
	<b>030102 R-FF</b>	0.1-0.4	0.03-0.15															
	<b>030104 L-FF</b>	0.1-0.4	0.05-0.20															
	<b>030104 R-FF</b>	0.1-0.4	0.05-0.20															
	<b>0401003 L-FF</b>	0.05-0.4	0.03-0.10															
	<b>0401003 R-FF</b>	0.05-0.4	0.03-0.10															
	<b>040101 L-FF</b>	0.1-0.5	0.03-0.12															
	<b>040101 R-FF</b>	0.1-0.5	0.03-0.12															
	<b>040102 L-FF</b>	0.1-0.5	0.03-0.15															
	<b>040102 R-FF</b>	0.1-0.5	0.03-0.15															
	<b>040104 L-FF</b>	0.1-0.5	0.05-0.20															
<b>040104 R-FF</b>	0.1-0.5	0.05-0.20																
 Medium For aluminum	<b>CCGT 060202 FL</b>	0.5-2.0	0.10-0.20														●	
	<b>060204 FL</b>	0.5-2.0	0.10-0.25															●
	<b>09T301 FL</b>	0.5-2.5	0.10-0.25															●
	<b>09T302 FL</b>	0.5-2.5	0.10-0.25															●
	<b>09T304 FL</b>	0.5-2.5	0.10-0.25															●
	<b>09T308 FL</b>	0.8-3.0	0.10-0.30															●
	<b>120402 FL</b>	0.5-2.5	0.10-0.25															●
	<b>120404 FL</b>	0.5-2.5	0.10-0.25															●
	<b>120408 FL</b>	1.0-3.5	0.10-0.30															●
  Finishing	<b>CCGT 060201 SA</b>	0.1-1.5	0.02-0.15															
	<b>060202 SA</b>	0.1-1.5	0.02-0.15															
	<b>060204 SA</b>	0.1-2.4	0.03-0.20															
	<b>09T301 SA</b>	0.1-2.5	0.02-0.15															
	<b>09T302 SA</b>	0.1-2.5	0.02-0.15															
	<b>09T304 SA</b>	0.1-2.5	0.03-0.20															
	<b>09T308 SA</b>	0.1-2.5	0.03-0.25															

● : Standard items



## Positive 7° clearance 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	6.35	2.38	0.2
<b>09</b>	9.52	3.97	0.1-0.4


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet								PVD coated		Uncoated			
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10		
  Roughing For Swiss	<b>CCGT 09T304M SH-F</b>	0.7-3.5	0.07-0.17										●	●			
  Medium For Swiss	<b>CCGT 060202M SM-F</b>	0.2-1.5	0.02-0.12										●	●			
	<b>09T301M SM-F</b>	0.2-1.5	0.02-0.12											●	●		
	<b>09T302M SM-F</b>	0.2-1.5	0.02-0.12											●	●		
	<b>09T304M SM-F</b>	0.3-1.5	0.03-0.12											●	●		
  Finishing For Swiss	<b>CCGT 060202M SL-F</b>	0.02-0.2	0.02-0.10										●	●			
	<b>09T301M SL-F</b>	0.02-0.2	0.015-0.10											●	●		
	<b>09T302M SL-F</b>	0.02-0.2	0.02-0.10											●	●		



A82-A84,  
A113, A183,  
A212, A213, A255

●: Standard items

## Positive 7° clearance 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	6.35	2.38	0.2-0.8
<b>09</b>	9.52	3.97	0.2-0.8
<b>12</b>	12.7	4.76	0.4-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermet		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	K10	
Finishing	<b>CCMT060202 FA</b>	0.1-1.5	0.03-0.15	●	●										●	●		●	●							
	<b>060204 FA</b>	0.2-1.5	0.05-0.15	●	●						●					●	●		●	●						
	<b>09T302 FA</b>	0.1-2.0	0.03-0.15	●	●											●	●		●	●						
	<b>09T304 FA</b>	0.2-2.0	0.05-0.20	●	●							●							●	●						
	<b>09T308 FA</b>	0.3-2.0	0.08-0.25	●	●								●					●		●	●					
Type B Finishing	<b>CCMT060204 FG</b>	0.3-1.5	0.05-0.15	●	●		●	●			●	●			●	●		●	●	●	●	●	●	●	●	
	<b>09T304 FG</b>	0.4-2.0	0.07-0.20	●	●	●	●	●			●	●			●	●		●	●	●	●	●	●	●	●	
	<b>09T308 FG</b>	0.6-2.0	0.10-0.25	●	●	●	●	●			●	●			●	●		●	●	●	●	●	●	●	●	
	<b>120408 FG</b> ✓	0.6-2.0	0.10-0.25	●								●						●		●	●	●	●	●	●	
Medium	<b>CCMT060202 FM</b>	0.5-1.5	0.07-0.15								●	●					●		●	●						
	<b>060204 FM</b>	0.5-1.5	0.08-0.15								●	●					●		●	●						
	<b>09T302 FM</b>	0.5-2.0	0.07-0.20								●	●					●		●	●						
	<b>09T304 FM</b>	0.5-2.5	0.08-0.25								●	●					●		●	●						
	<b>09T308 FM</b>	0.8-2.5	0.10-0.25								●	●					●		●	●						
Type B Medium	<b>CCMT060204 MT</b> ✓	0.5-2.0	0.07-0.20	●	●		●	●			●	●			●	●		●	●	●	●	●	●	●	●	
	<b>060208 MT</b> ✓	0.7-2.0	0.13-0.30	●	●		●	●			●	●			●	●		●	●	●	●	●	●	●	●	
	<b>09T304 MT</b>	0.7-3.5	0.10-0.25	●	●		●	●	●			●	●			●	●		●	●	●	●	●	●	●	
	<b>09T308 MT</b>	1.0-3.5	0.13-0.30	●	●		●	●	●			●	●			●	●		●	●	●	●	●	●	●	
	<b>120404 MT</b> ✓	1.0-5.0	0.10-0.25	●	●		●	●			●	●						●		●	●	●	●	●	●	
	<b>120408 MT</b>	1.3-5.0	0.13-0.30	●	●		●	●	●			●	●			●	●		●	●	●	●	●	●	●	
	<b>120412 MT</b>	1.5-5.0	0.17-0.35				●	●				●	●					●		●	●	●	●	●	●	
Medium	<b>CCMT060204 PC</b>	0.3-2.0	0.06-0.18								●	●		●	●					●	●					
	<b>060208 PC</b>	0.4-2.0	0.08-0.25								●	●		●	●					●	●					
	<b>09T304 PC</b>	0.35-3.0	0.08-0.25								●	●		●	●		●			●	●					
	<b>09T308 PC</b>	0.5-3.0	0.10-0.28								●	●		●	●		●			●	●					
	<b>120404 PC</b>	0.4-4.0	0.08-0.25								●	●		●	●					●	●					
	<b>120408 PC</b>	0.7-4.0	0.10-0.30								●	●		●	●					●	●					
	<b>120412 PC</b>	1.0-4.0	0.12-0.35								●	●		●	●		●			●	●					
Wiper Medium	<b>CCMT09T308 WT</b> *	0.7-3.0	0.10-0.40				●				●	●				●		●	●							

A82-A84,  
 A113, A183,  
 A212, A213, A255

● : Standard items  
 ✓ : Marked: Type B chip breaker  
 \* : Marked: Wiper inserts should be applied to  
 CLCR/L...

## Positive 11° clearance 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	6.35	2.38	0.4-0.8
<b>08</b>	7.94	2.38	0.4-0.8
<b>09</b>	9.52	3.18-3.97	0.4-0.8


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated										PVD coated									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100	TT17100	TT15080	TT8020	TT19080	TT13010	TT13020	TT19020	K10
 Finishing	<b>CPMT 080204 FG</b>	0.4-1.5	0.07-0.20	●																					
	<b>080208 FG</b>	0.6-1.5	0.10-0.25	●																					
	<b>090304 FG</b>	0.4-2.0	0.07-0.20	●																					
	<b>090308 FG</b>	0.6-2.0	0.10-0.25	●							●	●			●										
 Medium	<b>CPMT 080204 FM</b>	0.5-2.0	0.08-0.20																						
	<b>080208 FM</b>	0.8-2.0	0.10-0.20																						
	<b>090304 FM</b>	0.5-2.5	0.08-0.25																						
	<b>090308 FM</b>	0.8-2.5	0.10-0.25																						
 Medium	<b>CPMT 060204 PC</b>	0.3-2.0	0.06-0.18				●	●							●	●	●		●						
	<b>060208 PC</b>	0.4-2.0	0.08-0.25					●							●	●	●		●						
	<b>090304 PC</b>	0.45-3.0	0.08-0.25												●	●	●		●						
	<b>090308 PC</b>	0.6-3.0	0.10-0.30												●	●	●		●						
	<b>09T304 PC</b>	0.45-3.0	0.08-0.25												●	●	●				●				
	<b>09T308 PC</b>	0.6-3.0	0.10-0.30												●	●	●		●						



A215, A216

●: Standard items

## Positive 7° clearance 55° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	6.35	2.38	0.03-0.8
<b>11</b>	9.52	3.97	0.03-0.8


Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated				
				PV3010	CT3000	TT5080	TT18020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10			
  Right hand Finishing	<b>DCET 0702003 L-GF</b>	0.2-1.5	0.01-0.15															
	<b>0702003 R-GF</b>	0.2-1.5	0.01-0.15															
	<b>070201 L-GF</b>	0.2-1.5	0.02-0.15															
	<b>070201 R-GF</b>	0.2-1.5	0.02-0.15															
	<b>070202 L-GF</b>	0.3-1.5	0.03-0.17															
	<b>070202 R-GF</b>	0.3-1.5	0.03-0.17															
	<b>070204 L-GF</b>	0.3-1.5	0.05-0.20															
	<b>070204 R-GF</b>	0.3-1.5	0.05-0.20															
	<b>070208 L-GF</b>	0.3-1.5	0.05-0.20															
	<b>070208 R-GF</b>	0.3-1.5	0.05-0.20															
	<b>11T3003 L-GF</b>	0.2-2.5	0.02-0.15															
	<b>11T3003 R-GF</b>	0.2-2.5	0.02-0.15															
	<b>11T301 L-GF</b>	0.2-2.5	0.02-0.15															
	<b>11T301 R-GF</b>	0.2-2.5	0.02-0.15															
	<b>11T302 L-GF</b>	0.3-2.5	0.03-0.17															
	<b>11T302 R-GF</b>	0.3-2.5	0.03-0.17															
	<b>11T304 L-GF</b>	0.3-2.5	0.05-0.20															
	<b>11T304 R-GF</b>	0.3-2.5	0.05-0.20															
<b>11T308 L-GF</b>	0.3-2.5	0.05-0.20																
<b>11T308 R-GF</b>	0.3-2.5	0.05-0.20																
   Right hand Finishing	<b>DCET 0702003 L-GW*</b>	0.1-1.5	0.02-0.15															
	<b>0702003 R-GW*</b>	0.1-1.5	0.02-0.15															
	<b>11T3003 L-GW*</b>	0.1-1.5	0.02-0.15															
	<b>11T3003 R-GW*</b>	0.1-1.5	0.02-0.15															

A87, A88, A91, A92, A114, A117, A119, A166, A171, A183, A217-A219, A257

\* Marked: Wiper inserts should be applied to  
DJCR/L..., DUCR/L..., ZCR/L...

● : Standard items

## Positive 7° clearance 55° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	6.35	2.38	0.03-0.4
<b>11</b>	9.52	3.97	0.03-0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated							Uncoated						
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10				
  Right hand Finishing	<b>DCGT 0702003 L-FF</b>	0.05-0.3	0.03-0.10																
	<b>0702003 R-FF</b>	0.05-0.3	0.03-0.10																
	<b>070201 L-FF</b>	0.08-0.4	0.03-0.12																
	<b>070201 R-FF</b>	0.08-0.4	0.03-0.12																
	<b>070202 L-FF</b>	0.1-0.4	0.03-0.15																
	<b>070202 R-FF</b>	0.1-0.4	0.03-0.15																
	<b>070204 L-FF</b>	0.1-0.4	0.05-0.20																
	<b>070204 R-FF</b>	0.1-0.4	0.05-0.20																
	<b>11T3003 L-FF</b>	0.05-0.4	0.03-0.10																
	<b>11T3003 R-FF</b>	0.05-0.4	0.03-0.10																
	<b>11T301 L-FF</b>	0.1-0.5	0.03-0.12																
	<b>11T301 R-FF</b>	0.1-0.5	0.03-0.12																
	<b>11T302 L-FF</b>	0.1-0.5	0.03-0.15																
	<b>11T302 R-FF</b>	0.1-0.5	0.03-0.15																
	<b>11T304 L-FF</b>	0.1-0.5	0.05-0.20																
	<b>11T304 R-FF</b>	0.1-0.5	0.05-0.20																
 Medium For aluminum	<b>DCGT 070202 FL</b>	0.5-2.0	0.05-0.20															●	
	<b>070204 FL</b>	0.5-2.5	0.05-0.25																●
	<b>11T302 FL</b>	0.5-2.5	0.05-0.25																●
	<b>11T304 FL</b>	0.5-2.5	0.05-0.25																●
	<b>11T308 FL</b>	0.8-3.0	0.08-0.30																●
  Finishing	<b>DCGT 070201 SA</b>	0.1-1.5	0.02-0.15					●										●	
	<b>070202 SA</b>	0.1-1.5	0.02-0.15					●											●
	<b>070204 SA</b>	0.1-1.5	0.03-0.20					●											●
	<b>11T301 SA</b>	0.1-2.5	0.01-0.05					●											●
	<b>11T302 SA</b>	0.1-2.5	0.02-0.15					●											●
	<b>11T304 SA</b>	0.1-2.5	0.03-0.20					●											●
	<b>11T308 SA</b>	0.1-2.5	0.03-0.20					●											●

A87, A88, A91, A92, A114,  
 A117, A119, A166, A171,  
 A183, A217-A219, A257

● : Standard items

## Positive 7° clearance 55° rhombic inserts

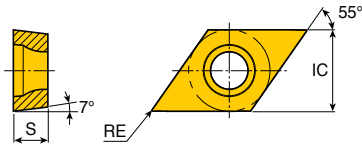


Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	6.35	2.38	0.1-0.4
<b>11</b>	9.52	3.97	0.1-0.4

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated				
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10			
  Roughing For Swiss	<b>DCGT 11T302M SH-E</b>	0.7-3.5	0.05-0.15													●		
	<b>11T302M SH-F</b>	0.7-3.5	0.05-0.15													●	●	
	<b>11T304M SH-F</b>	0.7-3.5	0.07-0.17													●	●	
  Medium For Swiss	<b>DCGT 070201M SM-F</b>	0.2-1.5	0.02-0.12													●	●	
	<b>070202M SM-F</b>	0.2-1.5	0.02-0.12													●	●	
	<b>070204M SM-F</b>	0.2-1.5	0.03-0.12													●	●	
	<b>11T301M SM-F</b>	0.2-1.5	0.02-0.12													●	●	
	<b>11T302M SM-F</b>	0.2-1.5	0.02-0.12													●	●	
	<b>11T304M SM-F</b>	0.2-1.5	0.03-0.12													●	●	
  Finishing For Swiss	<b>DCGT 070201M SL-F</b>	0.02-0.25	0.015-0.10													●	●	
	<b>070202M SL-F</b>	0.02-0.25	0.02-0.10													●	●	
	<b>11T301M SL-F</b>	0.02-0.25	0.015-0.10													●	●	
	<b>11T302M SL-F</b>	0.02-0.25	0.02-0.10													●	●	

● : Standard items

A87, A88, A91, A92, A114,  
 A117, A119, A166, A171,  
 A183, A217-A219, A257

## Positive 7° clearance 55° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	6.35	2.38	0.2-0.8
<b>11</b>	9.52	3.97	0.2-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																				
				Cermet		CVD coated								PVD coated				K10						
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100		TT7100	TT5080	TT8020	TT9080	TT3010	TT3020
Finishing	<b>DCMT 070202 FA</b>	0.1-1.5	0.03-0.15	●	●												●		●	●				
	<b>070204 FA</b>	0.2-1.5	0.05-0.20	●	●					●	●								●	●				
	<b>11T302 FA</b>	0.1-2.0	0.03-0.15	●	●									●			●		●	●				
	<b>11T304 FA</b>	0.2-2.0	0.05-0.20	●	●						●	●						●		●	●			
	<b>11T308 FA</b>	0.3-2.0	0.08-0.25	●	●						●	●						●		●	●			
Finishing	<b>DCMT 070204 FG</b>	0.4-1.5	0.07-0.20	●	●					●	●	●		●	●	●			●	●	●			
	<b>070208 FG</b>	0.4-2.0	0.07-0.20	●	●					●	●			●	●	●			●	●				
	<b>11T304 FG</b>	0.6-1.5	0.10-0.25	●	●	●	●			●	●	●		●	●	●			●	●	●	●		
	<b>11T308 FG</b>	0.6-2.0	0.10-0.25	●	●	●	●			●	●	●		●	●	●			●	●	●	●		
Medium	<b>DCMT 070202 FM</b>	0.5-1.5	0.07-0.20							●	●						●		●	●				
	<b>070204 FM</b>	0.5-1.5	0.08-0.20							●	●			●	●	●			●	●	●			
	<b>070208 FM</b>	0.8-1.5	0.10-0.20							●	●						●		●	●				
	<b>11T302 FM</b>	0.5-2.0	0.07-0.20							●	●						●		●	●				
	<b>11T308 FM</b>	0.8-2.5	0.10-0.25							●	●						●		●	●				
Medium	<b>DCMT 11T304 MT</b>	0.7-3.0	0.10-0.25	●	●		●	●	●	●	●	●		●	●	●			●	●				
	<b>11T308 MT</b>	1.0-3.0	0.13-0.30	●		●	●	●	●	●	●			●	●	●			●	●	●			
	<b>11T312 MT</b>	1.5-3.0	0.17-0.35	●		●	●			●							●		●	●				
Medium	<b>DCMT 070204 PC</b>	0.3-2.0	0.06-0.18							●	●			●	●					●				
	<b>070208 PC</b>	0.4-2.0	0.08-0.25							●	●			●	●					●				
	<b>11T304 PC</b>	0.35-3.0	0.08-0.25							●	●	●		●	●					●				
	<b>11T308 PC</b>	0.5-3.0	0.10-0.28							●	●	●		●	●					●				
	<b>11T312 PC</b>	0.5-3.0	0.12-0.32							●	●			●	●					●				

- A87, A88, A91, A92, A114,
- A117, A119, A166, A171,
- A183, A217-A219, A257


●: Standard items



# DPET DPGT



Positive 11° clearance 55° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>07</b>	6.35	2.38	0.03-0.2
<b>11</b>	9.52	3.97	0.03-0.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated			
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10		
 Right hand Finishing	<b>DPET 0702003 L-GF</b>	0.2-1.5	0.01-0.15														
	<b>0702003 R-GF</b>	0.2-1.5	0.01-0.15									●					
	<b>070201 L-GF</b>	0.2-1.5	0.02-0.15									●					
	<b>070201 R-GF</b>	0.2-1.5	0.02-0.15									●					
	<b>070202 L-GF</b>	0.3-1.5	0.03-0.17									●					
	<b>070202 R-GF</b>	0.3-1.5	0.03-0.17									●					
	<b>11T3003 L-GF</b>	0.2-2.5	0.02-0.15									●					
	<b>11T3003 R-GF</b>	0.2-2.5	0.02-0.15									●					
	<b>11T301 L-GF</b>	0.2-2.5	0.02-0.15									●					
	<b>11T301 R-GF</b>	0.2-2.5	0.02-0.15									●					
	<b>11T302 L-GF</b>	0.3-2.5	0.03-0.17									●					
	<b>11T302 R-GF</b>	0.3-2.5	0.03-0.17									●					
 Right hand Finishing	<b>DPGT 0702003 L-FF</b>	0.05-0.3	0.03-0.10									●					
	<b>0702003 R-FF</b>	0.05-0.3	0.03-0.10									●					
	<b>070201 L-FF</b>	0.08-0.4	0.03-0.12									●					
	<b>070201 R-FF</b>	0.08-0.4	0.03-0.12									●					
	<b>070202 L-FF</b>	0.1-0.4	0.03-0.15									●					
	<b>070202 R-FF</b>	0.1-0.4	0.03-0.15									●					
	<b>11T3003 L-FF</b>	0.05-0.4	0.03-0.10									●					
	<b>11T3003 R-FF</b>	0.05-0.4	0.03-0.10									●					
	<b>11T301 L-FF</b>	0.1-0.5	0.03-0.12									●					
	<b>11T301 R-FF</b>	0.1-0.5	0.03-0.12									●					
	<b>11T302 L-FF</b>	0.1-0.5	0.03-0.15									●					
	<b>11T302 R-FF</b>	0.1-0.5	0.03-0.15									●					

● : Standard items

## Positive 7° clearance high feed inserts



Size	Dimension (mm)		
	IC	S	θ
<b>10-HFG</b>	15.45	6.5	15°
<b>10-HFP</b>	16.45	6.5	20°

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermat			CVD coated							PVD coated												
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
 High feed For general	<b>FCMX 100616-HFG</b>	0.5-2.0	1.50-3.00												●	●										
 High feed For alloy steel	<b>FCMX 100616-HFP</b>	0.5-2.5	1.00-2.50												●	●	●									




● : Standard items

# RCGT RCMT RCMX



Positive 7° clearance round inserts



Size	Dimension (mm)		Size	Dimension (mm)	
	IC	S		IC	S
<b>08</b>	8.0	3.18	<b>20</b>	20.0	6.35
<b>10</b>	10.0	3.18-3.97	<b>25</b>	25.0	7.94
<b>12</b>	12.0	4.76	<b>32</b>	32.0	9.52
<b>16</b>	16.0	6.35			


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermat		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7015	TT7025	TT18105B	TT18115B	TT18125B	TT18135B	TT19215	TT19225	TT19235	TT15100	TT17100	TT15080	TT18020	TT19080	TT13010	TT13020	TT19020	K10		
Medium For aluminum	<b>RCGT 0803MO FL</b>	1.0-4.0	0.20-0.40																						●	
	<b>1003MO FL</b>	1.0-5.0	0.20-0.40																							●
	<b>10T3MO FL</b>	1.0-5.0	0.20-0.40																							●
Medium	<b>RCMT 080300 MGS</b>	0.5-2.0	0.15-0.30			●																●	●		●	
	<b>120400 MGS</b>	1.0-3.0	0.25-0.50			●																●	●		●	
Medium	<b>RCMT 080300 MT</b>	0.5-3.0	0.15-0.40							●	●					●										
	<b>10T300 MT</b>	1.0-4.0	0.20-0.50				●	●		●	●					●										
	<b>120400 MT</b>	2.0-5.0	0.30-0.60				●	●		●	●															
	<b>160600 MT</b>	3.0-7.0	0.40-0.80								●															
Medium	<b>RCMT 120400 PC</b>	2.0-5.0	0.30-0.60							●	●	●		●	●	●			●							
Roughing	<b>RCMX 100300</b>	1.5-4.0	0.25-0.50				●	●		●	●					●									●	
	<b>120400</b>	2.5-5.0	0.30-0.60				●	●		●	●					●	●								●	
	<b>160600</b>	3.0-7.0	0.40-0.75				●	●		●	●					●									●	
	<b>200600</b>	3.5-9.0	0.48-0.90				●	●		●	●	●				●									●	
	<b>250700</b>	4.0-12.0	0.55-1.20				●	●	●	●	●	●				●			●						●	
	<b>320900</b>	5.0-15.0	0.65-1.50				●			●	●	●				●			●						●	
Roughing	<b>RCMX 100300 RA</b>	1.0-4.0	0.20-0.50							●	●	●														
	<b>120400 RA</b>	2.0-5.0	0.25-0.60							●	●	●		●												
	<b>160600 RA</b>	2.5-7.0	0.35-0.75							●	●	●														
	<b>200600 RA</b>	3.0-9.0	0.40-0.90				●			●	●	●									●					
	<b>250700 RA</b>	3.5-12.0	0.50-1.20							●	●	●	●				●									
	<b>320900 RA</b>	4.0-15.0	0.60-1.50							●	●	●														

● : Standard items



A74, A75,  
A95, A96,  
A184

## Positive 7° clearance square inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	3.97	0.4-0.8
<b>12</b>	12.7	4.76	0.2-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																							
				Cermet			CVD coated								PVD coated			K10									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100		TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020		
 Medium For aluminum	<b>SCGT 09T308 FL</b>	0.5-3.0	0.10-0.30																							•	
	<b>120402 FL</b>	0.5-3.0	0.10-0.30																								•
	<b>120404 FL</b>	0.5-4.0	0.10-0.30																								•
	<b>120408 FL</b>	1.0-4.0	0.10-0.30																								•
 Finishing	<b>SCMT 09T304 FG</b>	0.6-2.0	0.08-0.25								•				•												
	<b>09T308 FG</b>	0.6-2.0	0.10-0.25								•	•			•	•				•	•						
 Medium	<b>SCMT 09T304 FM</b>	0.5-2.5	0.08-0.25								•	•								•	•						
	<b>09T308 FM</b>	0.8-2.5	0.10-0.25								•	•								•	•						
 Medium	<b>SCMT 09T304 MT</b>	0.7-3.5	0.10-0.25	•	•		•	•		•	•	•			•	•				•							
	<b>09T308 MT</b>	1.0-3.5	0.13-0.30	•		•	•	•		•	•	•			•	•	•			•	•						
	<b>120404 MT</b>	1.0-5.0	0.10-0.25	•		•	•			•	•									•							
	<b>120408 MT</b>	1.0-5.0	0.13-0.30	•		•	•	•		•	•	•			•	•	•			•	•						
	<b>120412 MT</b>	1.0-5.0	0.15-0.35				•	•		•	•	•									•						
 Medium	<b>SCMT 09T304 PC</b>	0.35-3.0	0.08-0.25								•	•			•	•										•	
	<b>09T308 PC</b>	0.5-3.0	0.10-0.28								•	•			•	•										•	
	<b>120404 PC</b>	0.4-4.0	0.08-0.25								•	•			•	•										•	
	<b>120408 PC</b>	0.7-4.0	0.10-0.30								•	•			•	•										•	
	<b>120412 PC</b>	1.0-4.0	0.12-0.35								•	•			•	•										•	



•: Standard items

## Positive 11° clearance square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	3.18	0.4-0.8
<b>12</b>	12.7	3.18-4.76	0.4-1.6
<b>15</b>	15.88	4.76	0.4-1.2
<b>19</b>	19.05	4.76	0.4-1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																				
				Cermet		CVD coated							PVD coated				K10							
				PV3010	CT3000	TT3005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT15100		TT7100	TT15080	TT8020	TT9080	TT3010	TT3020	TT9020
Finishing	<b>SPGN 090304</b>	0.7-3.5	0.08-0.20							●														●
	<b>090308</b>	0.7-3.5	0.10-0.25							●														●
	<b>120304</b>	1.0-5.0	0.08-0.20			●																		●
	<b>120308</b>	1.0-5.0	0.10-0.25							●	●													●
	<b>120312</b>	1.0-5.0	0.15-0.30																	●				
	<b>120404</b>	1.0-5.0	0.08-0.20																					
	<b>120408</b>	1.0-5.0	0.10-0.25																					●
	<b>120412</b>	1.0-5.0	0.15-0.30																					
	<b>120416</b>	1.0-5.0	0.18-0.33																					●
	<b>150404</b>	1.5-7.0	0.08-0.20								●													●
	<b>150408</b>	1.5-7.0	0.10-0.25																					
	<b>150412</b>	1.5-7.0	0.15-0.30																					
	<b>190404</b>	1.5-9.0	0.08-0.20								●													●
<b>190408</b>	1.5-9.0	0.10-0.25																					●	
Medium	<b>SPMR 090304</b>	0.7-3.5	0.10-0.25							●	●					●								
	<b>090308</b>	1.0-3.5	0.13-0.30							●	●					●								
	<b>120304</b>	1.0-5.0	0.10-0.25							●	●					●								
	<b>120308</b>	1.0-5.0	0.13-0.30							●	●	●				●								
	<b>120312</b>	1.0-5.0	0.15-0.35										●											
Medium	<b>SPUN 090304</b>	1.0-3.5	0.10-0.30																					
	<b>090308</b>	1.0-3.5	0.15-0.40																					
	<b>120304</b>	1.0-5.0	0.10-0.30							●	●													
	<b>120308</b>	1.0-5.0	0.15-0.40							●	●												●	
	<b>120312</b>	1.0-5.0	0.20-0.50																					
	<b>150404</b>	1.5-7.0	0.10-0.30														●							
<b>190412</b>	1.5-9.0	0.20-0.50								●														



● : Standard items



## Positive 7° clearance triangular inserts




Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	4.76	2.38	0.03-0.2
<b>09</b>	5.56	2.36	0.4
<b>11</b>	6.35	2.38-3.18	0.03-0.4
<b>16</b>	9.52	3.97	0.4-0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated				
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10			
<p>Right hand Finishing</p>	<b>TCET 0802003 L-GF</b>	0.2-1.5	0.02-0.12															
	<b>0802003 R-GF</b>	0.2-1.5	0.02-0.12									●						
	<b>080201 L-GF</b>	0.2-1.5	0.02-0.15									●						
	<b>080201 R-GF</b>	0.2-1.5	0.02-0.15									●						
	<b>080202 L-GF</b>	0.3-1.5	0.03-0.17									●						
	<b>080202 R-GF</b>	0.3-1.5	0.03-0.17									●						
	<b>1103003 L-GF</b>	0.2-1.5	0.02-0.12									●						
	<b>1103003 R-GF</b>	0.2-1.5	0.02-0.12									●						
	<b>110301 L-GF</b>	0.2-1.5	0.02-0.15									●						
	<b>110301 R-GF</b>	0.2-1.5	0.02-0.15									●						
	<b>110302 L-GF</b>	0.3-1.5	0.03-0.17									●						
	<b>110302 R-GF</b>	0.3-1.5	0.03-0.17									●						
	<b>110304 L-GF</b>	0.5-1.5	0.05-0.20									●						
<b>110304 R-GF</b>	0.5-1.5	0.05-0.20									●							
<p>Medium For aluminum</p>	<b>TCGT 090204 FL</b>	0.2-2.5	0.05-0.25														●	
	<b>110204 FL</b>	0.2-3.0	0.05-0.30															●
	<b>16T304 FL</b>	0.5-3.0	0.05-0.30															●
	<b>16T308 FL</b>	0.5-3.0	0.10-0.30															●
<p>Finishing</p>	<b>TCGT 110201 SA</b>	0.1-2.5	0.01-0.05															
	<b>110202 SA</b>	0.2-2.5	0.02-0.15															●
	<b>110204 SA</b>	0.2-2.5	0.03-0.20															●



● : Standard items

## Positive 7° clearance triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	3.97	1.98	0.2
<b>09</b>	5.56	2.38	0.2-0.8
<b>11</b>	6.35	2.38	0.2-0.8
<b>16</b>	9.52	3.97	0.4-1.2
<b>22</b>	12.7	4.76	0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10
	<b>TCMT 06T102 FA</b>	0.4-1.2	0.03-0.15	●												●									
	<b>110202 FA</b>	0.1-1.5	0.03-0.15	●														●	●						
	<b>110204 FA</b>	0.1-1.5	0.05-0.15	●	●												●								
	<b>TCMT 090208 FG</b>	0.6-1.5	0.10-0.25	●	●												●								
	<b>110204 FG</b>	0.4-1.5	0.07-0.20	●	●														●	●					
	<b>110208 FG</b>	0.6-1.5	0.10-0.25	●	●	●	●													●					
	<b>16T304 FG</b>	0.4-2.0	0.07-0.20	●	●	●															●				
	<b>16T308 FG</b>	0.6-2.0	0.10-0.25	●	●	●	●															●			
	<b>TCMT 090202 FM</b>	0.5-1.5	0.07-0.20																						
	<b>090204 FM</b>	0.5-1.5	0.08-0.20																						
	<b>110202 FM</b>	0.5-1.5	0.07-0.20																						
	<b>110204 FM</b>	0.5-1.5	0.08-0.20																						
	<b>110208 FM</b>	0.8-1.5	0.10-0.20																						
	<b>16T304 FM</b>	0.5-2.0	0.08-0.20																						
	<b>16T308 FM</b>	0.8-2.0	0.10-0.20																						
	<b>16T312 FM</b>	1.0-2.5	0.10-0.25																						
	<b>TCMT 090204 MT</b>	0.6-2.0	0.10-0.25	●	●	●	●																		
	<b>090208 MT</b>	0.8-2.0	0.13-0.30	●	●	●	●																		
	<b>110204 MT</b>	0.6-3.0	0.10-0.25	●	●	●	●																		●
	<b>110208 MT</b>	0.8-3.0	0.13-0.30	●	●	●	●																		
	<b>16T304 MT</b>	0.8-5.0	0.10-0.25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>16T308 MT</b>	1.0-5.0	0.10-0.30	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>16T312 MT</b>	1.5-5.0	0.10-0.30			●																			
	<b>220408 MT</b>	2.0-6.0	0.10-0.35																						
	<b>TCMT 090204 PC</b>	0.3-2.0	0.06-0.18																						
	<b>090208 PC</b>	0.4-2.0	0.08-0.25																						
	<b>110204 PC</b>	0.3-2.5	0.06-0.20																						
	<b>110208 PC</b>	0.42-2.5	0.09-0.26																						
	<b>16T304 PC</b>	0.35-3.0	0.08-0.25																						
	<b>16T308 PC</b>	0.5-3.0	0.10-0.28																						
	<b>16T312 PC</b>	0.6-3.0	0.12-0.36																						




● ✓ Marked: Type B chip breaker

● : Standard items



## Positive 11° clearance triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	4.76	2.38	0.03-0.2
<b>11</b>	6.35	3.18	0.03-0.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated			
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10		
<p>Right hand Finishing</p>	<b>TPET 0802003 L-GF</b>	0.2-1.5	0.02-0.12														
	<b>0802003 R-GF</b>	0.2-1.5	0.02-0.12								●						
	<b>080201 L-GF</b>	0.2-1.5	0.02-0.15								●						
	<b>080201 R-GF</b>	0.2-1.5	0.02-0.15								●						
	<b>080202 L-GF</b>	0.3-1.5	0.03-0.17								●						
	<b>080202 R-GF</b>	0.3-1.5	0.03-0.17								●						
	<b>1103003 L-GF</b>	0.2-1.5	0.02-0.12								●						
	<b>1103003 R-GF</b>	0.2-1.5	0.02-0.12								●						
	<b>110301 L-GF</b>	0.2-1.5	0.02-0.15								●						
	<b>110301 R-GF</b>	0.2-1.5	0.02-0.15								●						
	<b>110302 L-GF</b>	0.3-1.5	0.03-0.17								●						
	<b>110302 R-GF</b>	0.3-1.5	0.03-0.17								●						
<p>Right hand Finishing</p>	<b>TPGT 0802003 L-FF</b>	0.05-0.3	0.03-0.10								●						
	<b>0802003 R-FF</b>	0.05-0.3	0.03-0.10								●						
	<b>080201 L-FF</b>	0.08-0.4	0.03-0.12								●						
	<b>080201 R-FF</b>	0.08-0.4	0.03-0.12								●						
	<b>080202 L-FF</b>	0.1-0.4	0.03-0.15								●						
	<b>080202 R-FF</b>	0.1-0.4	0.03-0.15								●						
	<b>1103003 L-FF</b>	0.05-0.4	0.03-0.10								●						
	<b>1103003 R-FF</b>	0.05-0.4	0.03-0.10								●						
	<b>110301 L-FF</b>	0.1-0.5	0.03-0.12								●						
	<b>110301 R-FF</b>	0.1-0.5	0.03-0.12								●						
	<b>110302 L-FF</b>	0.1-0.5	0.03-0.15								●						
	<b>110302 R-FF</b>	0.1-0.5	0.03-0.15								●						




● : Standard items

# TPGN TPGT TPGX



## Positive 11° clearance triangular inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	5.56	2.38	0.2-0.4
<b>11</b>	6.35	3.18	0.2-0.8
<b>16</b>	9.52	4.76	0.2-1.2
<b>22</b>	12.7	4.76	0.4-3.0
<b>27</b>	15.88	6.35	0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																										
				Cermat			CVD coated							PVD coated																
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	P20	K10				
 Finishing	<b>TPGN 090204</b>	0.5-3.0	0.07-0.20																							●	●			
	<b>110304</b>	0.7-3.0	0.07-0.20																								●	●		
	<b>110308</b>	1.0-3.0	0.10-0.25										●															●		
	<b>160302</b>	1.0-5.0	0.05-0.18																									●		
	<b>160304</b>	1.0-5.0	0.07-0.20										●															●	●	
	<b>160308</b>	1.0-5.0	0.10-0.25					●				●	●															●	●	
	<b>160312</b>	1.0-5.0	0.15-0.30																									●		
	<b>220404</b>	1.5-7.0	0.07-0.20																									●	●	
	<b>220408</b>	1.5-7.0	0.10-0.25											●															●	
	<b>220412</b>	1.5-7.0	0.15-0.30																										●	●
	<b>220416</b>	1.5-7.0	0.20-0.35																									●		
	<b>220425</b>	1.5-7.0	0.25-0.40																											
	<b>220430</b>	1.5-7.0	0.30-0.45																											
	<b>270608</b>	3.0-8.0	0.15-0.25										●																	
 Right hand Finishing	<b>TPGT 090204 L-C</b>	0.3-1.5	0.05-0.20			●																								
	<b>110304 L-C</b>	0.5-2.0	0.05-0.20			●																							●	
	<b>110304 R-C</b>	0.5-2.0	0.05-0.20			●																								
	<b>110308 L-C</b>	0.5-2.0	0.07-0.25			●																								
	<b>160404 L-C</b>	0.7-3.0	0.05-0.20			●																								
	<b>160404 R-C</b>	0.7-3.0	0.05-0.20			●																								
 Left hand Finishing	<b>TPGX 090202 L</b>	0.4-1.5	0.05-0.15			●																						●		
	<b>090204 L</b>	0.6-1.5	0.08-0.20			●																						●		
	<b>110302 L</b>	0.5-1.5	0.08-0.20			●																								
	<b>110302 R</b>	0.5-1.5	0.08-0.20			●																								
	<b>110304 L</b>	0.6-2.0	0.08-0.20			●																						●		
	<b>110304 R</b>	0.6-2.0	0.08-0.20			●																								

A53, A54,
   
A198,
   
A223, A224


● : Standard items

## Positive 11° clearance triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	5.56	2.38	0.2-0.8
<b>11</b>	6.35	2.38-3.18	0.2-0.8
<b>16</b>	9.52	3.18-3.97	0.2-1.2
<b>22</b>	12.7	4.76	0.4-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated								PVD coated				K10								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100		TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	
 Type B Medium	<b>TPMR 090204</b>	0.5-2.0	0.10-0.25																							
	<b>090208</b>	0.7-2.0	0.13-0.30																							
	<b>110304</b> ✓	0.7-3.0	0.10-0.25			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>110308</b>	1.0-3.0	0.13-0.30			●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>160304</b> ✓	1.0-5.0	0.10-0.25			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>160308</b>	1.0-5.0	0.13-0.30			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>160312</b>	1.0-5.0	0.15-0.35								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<b>220404</b> ✓	1.0-7.0	0.10-0.25																							
	<b>220408</b> ✓	1.5-7.0	0.13-0.30																							
<b>220412</b> ✓	1.5-7.0	0.15-0.35																								
 Finishing	<b>TPMT 090202 FA</b>	0.1-1.2	0.03-0.15			●	●																			
	<b>090204 FA</b>	0.2-1.2	0.05-0.20			●	●																			
	<b>110302 FA</b>	0.1-1.5	0.03-0.15			●	●																			
	<b>110304 FA</b>	0.2-1.5	0.05-0.20			●	●																			
	<b>110308 FA</b>	0.3-1.5	0.08-0.25			●	●																			
	<b>16T304 FA</b>	0.2-2.0	0.05-0.20			●	●																			
	<b>16T308 FA</b>	0.3-2.0	0.08-0.25			●	●																			
 Finishing	<b>TPMT 110304 FG</b>	0.4-1.5	0.07-0.20			●	●	●																		
 Medium	<b>TPMT 090202 FM</b>	0.5-1.5	0.07-0.20																							
	<b>090204 FM</b>	0.5-1.5	0.08-0.20																							
	<b>110302 FM</b>	0.5-1.5	0.07-0.20																							
	<b>110304 FM</b>	0.5-1.5	0.08-0.20																							
	<b>110308 FM</b>	0.8-1.5	0.10-0.20																							
	<b>160302 FM</b>	0.5-2.0	0.07-0.20																							
	<b>160304 FM</b>	0.5-2.0	0.08-0.20																							
<b>160308 FM</b>	0.8-2.5	0.10-0.25																								
 Medium	<b>TPMT 090204 PC</b>	0.3-2.0	0.06-0.18																							
	<b>110204 PC</b>	0.4-2.5	0.06-0.20																							
	<b>110208 PC</b>	0.5-2.5	0.10-0.26																							
	<b>110304 PC</b>	0.4-2.5	0.06-0.20																							
	<b>110308 PC</b>	0.5-2.5	0.10-0.26																							
	<b>16T304 PC</b>	0.45-3.0	0.08-0.25																							
<b>16T308 PC</b>	0.5-3.0	0.10-0.30																								



● ✓ Marked: Type B chip breaker


● : Standard items









# VBET VBGT




## Positive 5° clearance 35° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.03-0.4
<b>16</b>	9.52	4.76	0.1-0.4

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated	
				PV3010	CT3000	TT5080	TT18020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10
 Right hand Finishing	<b>VBET 110301 L-GF</b>	0.2-1.5	0.02-0.15									●			
	<b>110301 R-GF</b>	0.2-1.5	0.02-0.15									●			
	<b>110302 L-GF</b>	0.3-1.5	0.03-0.17									●			
	<b>110302 R-GF</b>	0.3-1.5	0.03-0.17									●			
	<b>110304 L-GF</b>	0.3-1.5	0.05-0.20									●			
	<b>110304 R-GF</b>	0.3-1.5	0.05-0.20									●			
 Right hand Finishing	<b>VBET 1103003 L-GW*</b>	0.1-1.5	0.02-0.15									●			
	<b>1103003 R-GW*</b>	0.1-1.5	0.02-0.15									●			
 Left hand Finishing	<b>VBGT 1103003 L-FF</b>	0.05-0.4	0.03-0.10									●			
	<b>1103003 R-FF</b>	0.05-0.4	0.03-0.10									●			
	<b>110301 L-FF</b>	0.1-0.5	0.03-0.12									●			
	<b>110301 R-FF</b>	0.1-0.5	0.03-0.12									●			
	<b>110302 L-FF</b>	0.1-0.5	0.03-0.15									●			
	<b>110302 R-FF</b>	0.1-0.5	0.03-0.15									●			
 Finishing	<b>VBGT 110301 SA</b>	0.1-1.5	0.01-0.20			●						●			
	<b>110302 SA</b>	0.2-1.5	0.02-0.20			●						●			
	<b>110304 SA</b>	0.2-1.5	0.05-0.20			●						●			
	<b>160401 SA</b>	0.1-1.5	0.01-0.20			●						●			
	<b>160402 SA</b>	0.2-1.5	0.02-0.20			●						●			
	<b>160404 SA</b>	0.2-2.5	0.03-0.20									●			
 Finishing For Swiss	<b>VBGT 110302M SL-F</b>	0.02-0.25	0.02-0.10										●	●	
 Medium For Swiss	<b>VBGT 110301M SM-F</b>	0.2-1.5	0.02-0.12										●	●	
	<b>110302M SM-F</b>	0.2-1.5	0.02-0.12										●	●	
	<b>110304M SM-F</b>	0.2-1.5	0.03-0.12										●	●	


 A102, A103, A108-A110, A116, A118, A119, A168, A169, A185, A228, A230, A260


\* Marked: Wiper inserts should be applied to □VJBR/L...

● : Standard items

# VBGT VBMT




Positive 5° clearance 35° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.4-0.8
<b>16</b>	9.52	4.76	0.4-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		CVD coated										PVD coated								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
Finishing	<b>VBGT 160404 FGS</b>	0.2-2.5	0.03-0.20			●												●		●	●	●	●	
	<b>160408 FGS</b>	0.3-2.5	0.05-0.20			●												●		●	●	●	●	
	<b>160412 FGS</b>	0.3-2.5	0.07-0.20			●												●		●	●	●	●	
Finishing	<b>VBMT 110304 FA</b>	0.2-1.5	0.05-0.20	●	●					●	●				●			●	●					
	<b>160404 FA</b>	0.2-2.0	0.05-0.20	●	●					●	●				●			●	●					
	<b>160408 FA</b>	0.3-2.0	0.08-0.25	●	●					●	●				●			●	●					
Finishing	<b>VBMT 160404 FG</b>	0.5-1.5	0.07-0.20	●	●	●	●			●	●	●	●	●	●			●	●	●	●			
	<b>160408 FG</b>	0.7-2.0	0.10-0.25	●	●	●	●	●		●	●	●	●	●	●			●	●	●	●			
Medium	<b>VBMT 110304 FM</b>	0.5-1.5	0.08-0.20							●	●				●			●	●					
	<b>110308 FM</b>	0.5-1.5	0.10-0.20							●	●				●			●	●					
	<b>160404 FM</b>	0.5-2.0	0.08-0.20							●	●				●			●	●					
	<b>160408 FM</b>	0.8-2.0	0.10-0.20							●	●				●			●	●					
	<b>160412 FM</b>	1.0-2.5	0.10-0.25							●	●				●			●	●					
Finishing	<b>VBMT 160404 FX</b>	0.2-2.0	0.05-0.20	●	●					●	●							●	●					
	<b>160408 FX</b>	0.2-2.0	0.07-0.20	●	●					●	●	●							●					
Medium	<b>VBMT 160404 MT</b>	0.6-3.0	0.10-0.25	●	●	●	●	●	●	●	●	●	●	●	●			●	●					●
	<b>160408 MT</b>	0.9-3.0	0.13-0.30	●	●	●	●	●	●	●	●	●	●	●	●			●	●					
	<b>160412 MT</b>	1.2-3.0	0.15-0.30							●	●				●									
Medium	<b>VBMT 160404 PC</b>	0.5-2.8	0.07-0.22							●	●		●						●					
	<b>160408 PC</b>	0.5-2.8	0.10-0.27							●	●		●						●					
	<b>160412 PC</b>	0.5-2.8	0.10-0.28			●				●	●		●		●			●						


 A102, A103, A108-A110, A116,  
 A118, A119, A168, A169, A185,  
 A228, A230, A232, A233, A260

●: Standard items

## Positive 7° clearance 35° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.1-0.4
<b>16</b>	9.52	4.76	0.2-1.2
<b>22</b>	12.7	5.56	3.0

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated		
				PV3010	CT3000	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10	
 Medium For aluminum	<b>VCGT 110302 FL</b>	0.2-2.5	0.05-0.20													●
	<b>110304 FL</b>	0.5-3.0	0.05-0.25													●
	<b>160402 FL</b>	0.5-2.5	0.05-0.25													●
	<b>160404 FL</b>	0.5-3.0	0.05-0.25													●
	<b>160408 FL</b>	0.5-3.0	0.10-0.25													●
	<b>160412 FL</b>	0.5-3.0	0.10-0.25													●
	<b>220530 FL</b>	1.5-4.5	0.15-0.30													●
 Finishing	<b>VCGT 110301 SA</b>	0.1-1.5	0.01-0.20			●				●						
	<b>110302 SA</b>	0.2-1.5	0.02-0.20			●				●						
	<b>110304 SA</b>	0.2-1.5	0.05-0.20			●				●						
 Medium For Swiss	<b>VCGT 110301M SM-F</b>	0.2-1.5	0.02-0.12										●	●		
	<b>110302M SM-F</b>	0.2-1.5	0.02-0.12										●	●		
	<b>110304M SM-F</b>	0.2-1.5	0.03-0.12										●	●		
 Finishing For Swiss	<b>VCGT 110302M SL-F</b>	0.02-0.25	0.02-0.10										●	●		

A104, A105,  
 A230, A232, A233

● : Standard items

## Positive 7° clearance 35° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	4.76	2.38	0.2-0.4
<b>11</b>	6.35	3.18	0.4
<b>16</b>	9.52	4.76	0.4-0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermat		CVD coated										PVD coated								
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
 VCMT 08, 11	<b>VCMT 080202 PC</b>	0.2-1.5	0.02-0.15																					
	<b>080204 PC</b>	0.2-1.5	0.05-0.20																					
	<b>110304 PC</b>	0.1-1.7	0.05-0.20																					
	<b>160404 PC</b>	0.3-2.0	0.05-0.20																					
	<b>160408 PC</b>	0.3-2.0	0.07-0.20																					
 VCMT 16 Medium																								
 Medium	<b>VCMT 080202 FM</b>	0.5-1.5	0.07-0.15																					
	<b>080204 FM</b>	0.5-1.5	0.08-0.15																					
	<b>110304 FM</b>	0.5-1.5	0.08-0.20																					
	<b>160404 FM</b>	0.5-2.0	0.08-0.20																					
	<b>160408 FM</b>	0.8-2.0	0.10-0.20																					


A104, A105, A228,  
 A230, A232, A233

●: Standard items





# VPET VPGT



Positive 11° clearance 35° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	4.76	2.38	0.1-0.2
<b>11</b>	6.35	3.18	0.03-0.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Cermet		PVD coated								Uncoated						
				PV3010	CT3000	TT5080	TT18020	TT9080	TT3010	TT3020	TT9020	TT4410	TT4430	P20	K10					
  Right hand Finishing	<b>VPET 080201 L-GF</b>	0.2-1.5	0.02-0.15																	
	<b>080201 R-GF</b>	0.2-1.5	0.02-0.15																	
	<b>080202 L-GF</b>	0.3-1.5	0.03-0.17																	
	<b>080202 R-GF</b>	0.3-1.5	0.03-0.17																	
	<b>1103003 L-GF</b>	0.2-1.5	0.02-0.12																	
	<b>1103003 R-GF</b>	0.2-1.5	0.02-0.12																	
	<b>110301 L-GF</b>	0.2-1.5	0.02-0.15																	
	<b>110301 R-GF</b>	0.2-1.5	0.02-0.15																	
	<b>110302 L-GF</b>	0.3-1.5	0.03-0.17																	
	<b>110302 R-GF</b>	0.3-1.5	0.03-0.17																	
  Left hand Finishing	<b>VPGT 080201 L-FF</b>	0.08-0.4	0.03-0.12																	
	<b>080201 R-FF</b>	0.08-0.4	0.03-0.12																	
	<b>080202 L-FF</b>	0.1-0.4	0.03-0.15																	
	<b>080202 R-FF</b>	0.1-0.4	0.03-0.15																	
	<b>1103003 L-FF</b>	0.05-0.4	0.03-0.10																	
	<b>1103003 R-FF</b>	0.05-0.4	0.03-0.10																	
	<b>110301 L-FF</b>	0.1-0.5	0.03-0.12																	
	<b>110301 R-FF</b>	0.1-0.5	0.03-0.12																	
	<b>110302 L-FF</b>	0.1-0.5	0.03-0.15																	
	<b>110302 R-FF</b>	0.1-0.5	0.03-0.15																	


● : Standard items









## Inserts



Size	Dimension (mm)			
	L	IC	S	RE
<b>40</b>	40.6	25.4	11.65	2.38


Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet			CVD coated						PVD coated			K10									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225		TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
	<b>LNMM 401224 R-HX</b>	6.0-32.0	0.70-1.50									●	●	●				●							
	<b>LNMM 401224 L-HX</b>	6.0-32.0	0.70-1.50									●						●							
Roughing																									





● : Standard items

# LNMX

## Inserts




Size	Dimension (mm)			
	L	IC	S	RE
<b>50</b>	50.8	25.4	14.2	3.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																					
				Cermet			CVD coated						PVD coated			K10									
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225		TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020
	<b>LNMX 501432 HD</b>	6.0-40.0	0.70-1.60									●	●					●							
Roughing																									
	<b>LNMX 501432 HY</b>	5.0-40.0	0.65-1.50									●		●				●							
Roughing																									



● : Standard items

## TOP-RAIL inserts



Size	Dimension (mm)			
	L	IC	S	RE
<b>19</b>	19.05	10	19.05	4.0
<b>30</b>	30	12	19.05	4.0

Insert	Designation	ap (mm)	Feed (mm/rev)	Coating																						
				Cermet		CVD coated										PVD coated										
				PV3010	CT3000	TT3005	TT7005	TT7015	TT7025	TT8105B	TT8115B	TT8125B	TT8135B	TT9215	TT9225	TT9235	TT5100	TT7100	TT5080	TT8020	TT9080	TT3010	TT3020	TT9020	K10	
 Finishing	<b>LNMX 191940 TWF</b>	0.3-5.0	0.30-1.0							●	●	●														
 Medium	<b>LNMX 191940 TWM</b>	1.5-9.0	0.45-1.5							●	●	●														
	<b>301940 TWM</b>	1.5-15.0	0.50-1.5							●	●	●														
 Roughing	<b>LNMX 301940 TWR</b>	2.0-15.0	0.70-1.8							●	●	●														




● : Standard items


# Hard Turning for Ceramic Inserts

## Selection guide for ceramic grades


### For cast iron

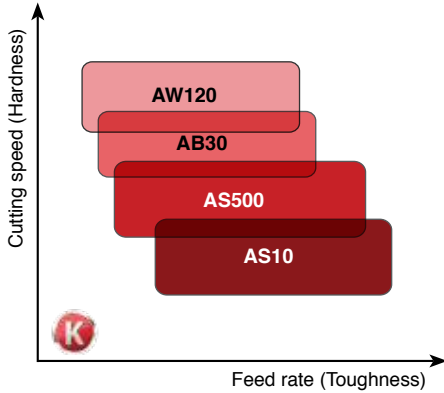

### For hardened steel (HRc 40~60)

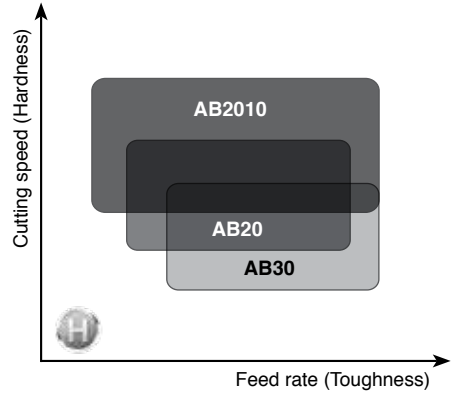

### For super alloys

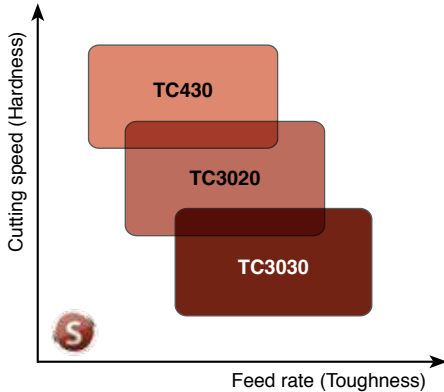

## Edge preparations for ceramic inserts


Single land		Double land			
Symbol	Width(mm) X angle	Symbol	Width(mm) X angle		Shape
			L1 X A1	L2 X A2	
T2	0.10 X 30°	U1	0.7 X 15°	0.15 X 30°	
T3	0.15 X 30°	U2	1.5 X 15°	0.15~0.2 X 30°	
T4	0.20 X 30°	U3	2.0 X 15°	0.2 X 30°	
T5	0.30 X 20°	- All items are honed			
T6	0.10 X 20°				
T7	0.20 X 20°				

• Edge preparations of non symbol items is 0.2 X 25° with no hone except □NMG-CE 0.25 X 20° with hone


# Hard Turning for CBN and PCD Inserts

## Selection guide for CBN and PCD grades

### For hardened steel (HRC ≥ 50, CBN)

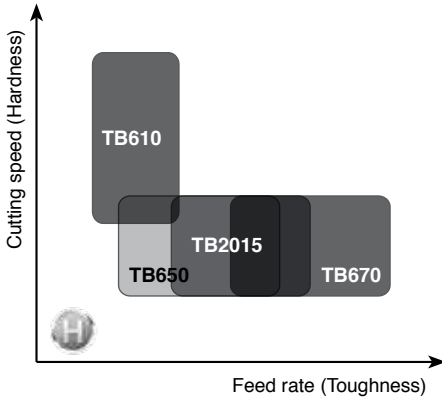


### For cast iron (CBN)

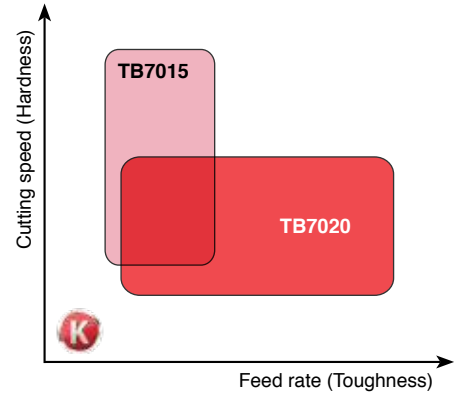

- TB730 for General turning of sintered or powder metals

### For non-ferrous material (PCD)

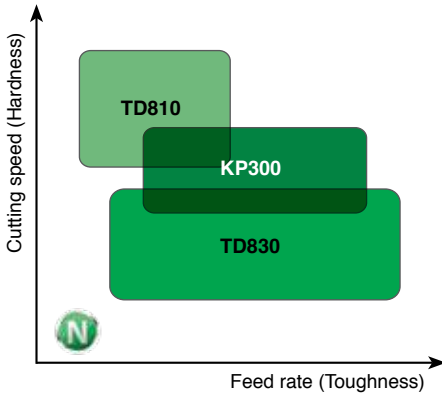

### Information of CBN type

LS	Brazed small size CBN Tip, 1 corner
LS2	Brazed small size CBN Tip, 2 corners
LN	Brazed large size CBN Tip, 1 corner
LN2	Brazed large size CBN Tip, 2 corners
SD	Solid type
FT	Full Top type
DA	Dimple type
WZ	Wiper geometry

### Edge preparations for CBN inserts

Single land				
Symbol	Width(mm) X angle L X A	Symbol	Width(mm) X angle L X A	Shape
TL	0.13X15°	SL	0.13X15°+ honed	
TM	0.13X25°	SM	0.13X25°+ honed	
TH	0.13X35°	SH	0.13X35°+ honed	


- Edge preparations of non symbol items depends on grades

TB610, TB2015, TB650, TB670 : 0.13x20°+honed

TB730, TB7015 : 0.13x20°+no honed


TB7020 : 0.20x20°+honed

## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	4.76	0.4-1.6
<b>16</b>	15.88	4.76-6.35	0.8-1.6
<b>19</b>	19.05	6.35-7.94	0.8-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic														
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030					
	<b>CNGA 120404</b>	0.10-3.00	0.05-0.15	●	●	●												
	<b>120404 T2</b>	0.10-3.00	0.05-0.15			●												
	<b>120404 T7-WZ</b>	0.10-3.00	0.05-0.15	●														
	<b>120408</b>	0.10-3.00	0.05-0.20	●	●	●		●	●	●								
	<b>120408 E</b>	0.10-3.00	0.05-0.20											●		●		
	<b>120408 S7</b>	0.10-3.00	0.05-0.20	●														
	<b>120408 T2</b>	0.10-3.00	0.05-0.20		●	●												
	<b>120408 T6</b>	0.10-3.00	0.05-0.20		●								●	●	●			
	<b>120408 T6-WZ</b>	0.10-3.00	0.05-0.20									●						
	<b>120408 T7</b>	0.10-3.00	0.05-0.20				●	●										
	<b>120408 T7-WZ</b>	0.10-3.00	0.05-0.20	●	●													
	<b>120412</b>	0.10-3.00	0.05-0.25	●	●	●				●	●							
	<b>120412 T2</b>	0.10-3.00	0.05-0.25		●													
	<b>120412 T6-WZ</b>	0.10-3.00	0.05-0.25							●	●							
	<b>120412 T7</b>	0.10-3.00	0.05-0.25						●									
	<b>120412 T7-WZ</b>	0.10-3.00	0.05-0.25	●	●													
	<b>120416</b>	0.10-3.00	0.05-0.30		●	●				●	●							
	<b>160608</b>	0.10-3.50	0.05-0.20		●													
	<b>160612</b>	0.10-3.50	0.05-0.25			●												
<b>160616</b>	0.10-3.50	0.05-0.30			●													
<b>190608</b>	0.10-4.50	0.05-0.20			●													
<b>190612</b>	0.10-4.50	0.05-0.25			●													
	<b>CNGN 120404</b>	0.10-3.00	0.05-0.15			●												
	<b>120404 T6</b>	0.10-3.00	0.05-0.15										●					
	<b>120408</b>	0.10-3.00	0.05-0.20	●	●	●				●								
	<b>120408 E</b>	0.10-3.00	0.05-0.20										●	●	●			
	<b>120408 T6</b>	0.10-3.00	0.05-0.20										●	●	●			
	<b>120412 E</b>	0.10-3.00	0.05-0.25										●	●	●			
	<b>120412 T6</b>	0.10-3.00	0.05-0.25										●					
	<b>120412 T7</b>	0.10-3.00	0.05-0.25				●											
	<b>120416</b>	0.10-3.00	0.05-0.30								●							
	<b>120416 T6</b>	0.10-3.00	0.05-0.30											●				




●: Standard items

# CNGN CNGX-CH CNMG-CE



## Negative 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	4.76-7.94	0.4-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic													
				AB2010	AB20	AB30	AW120	SC500	AS500	SC10	AS10	TC430	TC3020	TC3030			
	<b>CNGN 120708</b>	0.10-3.00	0.05-0.20	●	●	●											
	<b>120708 E</b>	0.10-3.00	0.05-0.20										●	●	●		
	<b>120708 T6</b>	0.10-3.00	0.05-0.20										●	●	●		
	<b>120712</b>	0.10-3.00	0.05-0.25			●						●					
	<b>120712 E</b>	0.10-3.00	0.05-0.25										●	●	●		
	<b>120712 T6</b>	0.10-3.00	0.05-0.25										●	●	●		
	<b>120712 T7</b>	0.10-3.00	0.05-0.25				●										
	<b>120716</b>	0.10-3.00	0.05-0.30			●					●						
	<b>120716 T6</b>	0.10-3.00	0.05-0.30											●	●	●	
	<b>120716 T7</b>	0.10-3.00	0.05-0.30				●										
 Dimple type	<b>CNGX 120712 CH</b>	0.10-3.50	0.05-0.30							●	●						
	<b>120712 T7-CH</b>	0.10-3.50	0.05-0.30					●	●		●						
	<b>120716 CH</b>	0.10-3.50	0.05-0.35							●	●						
	<b>120716 T7-CH</b>	0.10-3.50	0.05-0.35							●							
 Pressed type	<b>CNMG 120404 CE</b>	0.10-3.00	0.05-0.15			●											
	<b>120408 CE</b>	0.10-3.00	0.05-0.20		●	●											

A69-A71, A148-A150,  
 A155, A178, A208,  


 A238, A249

● : Standard items

# DNGA DNGN DNGX-CH DNMG-CE



## Negative 55° rhombic inserts

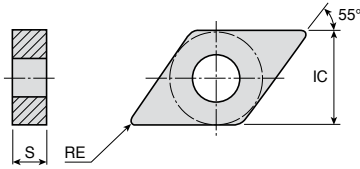

Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	10	8.0	1.2
<b>15</b>	12.7	4.76-8.0	0.4-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic											
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030		
	<b>DNGA 150404</b>	0.10-2.50	0.05-0.15		●	●									
	<b>150408</b>	0.10-2.50	0.05-0.20	●	●	●									
	<b>150412</b>	0.10-2.50	0.05-0.25	●	●	●									
	<b>150604</b>	0.10-2.50	0.05-0.15	●	●	●									
	<b>150608</b>	0.10-2.50	0.05-0.20	●	●	●				●					
	<b>150612</b>	0.10-2.50	0.05-0.25	●	●	●				●					
	<b>150616</b>	0.10-2.50	0.05-0.30		●	●									
	<b>DNGN 150408</b>	0.10-2.50	0.05-0.20		●										
	<b>150704</b>	0.10-2.50	0.05-0.15			●									
	<b>150708</b>	0.10-2.50	0.05-0.20			●									
	<b>150708 T6</b>	0.10-2.50	0.05-0.20										●		
	<b>150708 T7</b>	0.10-2.50	0.05-0.20				●								
	<b>150712 T6</b>	0.10-2.50	0.05-0.25											●	
	<b>150712 T7</b>	0.10-2.50	0.05-0.25				●								
 Dimple type	<b>DNGX 120712 T7-CH</b>	0.10-3.00	0.05-0.30											●	
	<b>150708 T7-CH</b>	0.10-3.00	0.05-0.25											●	
	<b>150712 CH</b>	0.10-3.00	0.05-0.30							●				●	
	<b>150712 T7-CH</b>	0.10-3.00	0.05-0.30						●						
	<b>150716 CH</b>	0.10-3.50	0.05-0.35											●	
	<b>150716 T7-CH</b>	0.10-3.50	0.05-0.35											●	
 Pressed type	<b>DNMG 150608 CE</b>	0.10-2.50	0.05-0.20			●									

A63, A64, A72, A73,  
A151, A156, A178,  
A209, A240

●: Standard items




## Negative 75° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>13</b>	12.7	7.94	0.8-1.6


Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic										
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030	
	<b>ENGN 130708</b>	0.10-2.50	0.05-0.20	●	●	●								
	<b>130708 T5</b>	0.10-2.50	0.05-0.20			●								
	<b>130712 T5</b>	0.10-2.50	0.05-0.25			●								
	<b>130716</b>	0.10-2.50	0.05-0.30		●									
	<b>130716 U2</b>	0.10-2.50	0.05-0.30			●								



● : Standard items

# HNGX-CH

## Negative 120° hexagonal inserts




Size	Dimension (mm)		
	IC	S	RE
<b>05</b>	12.7	7.94	1.2-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic										
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030	
 Dimple type	<b>HNGX 050712 CH</b>	0.05-0.25	0.10-2.00							●				
	<b>050712 T7-CH</b>	0.05-0.25	0.10-2.00					●						
	<b>050716 CH</b>	0.05-0.30	0.10-2.00							●				

● : Standard items



## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	4.76-7.94	0.4-1.6
<b>15</b>	15.88	7.94	1.6
<b>19</b>	19.05	6.35-7.94	0.8-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic											
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030		
	<b>SNGA 120404</b>	0.10-3.00	0.05-0.15	●	●	●									
	<b>120408</b>	0.10-3.00	0.05-0.20	●	●	●									
	<b>120408 S7</b>	0.10-3.00	0.05-0.20	●											
	<b>120412</b>	0.10-3.00	0.05-0.25	●	●	●				●					
	<b>120416</b>	0.10-3.00	0.05-0.30							●	●				
	<b>190608</b>	0.10-4.50	0.05-0.20			●									
	<b>190612</b>	0.10-4.50	0.05-0.25			●									
	<b>SNGN 120404</b>	0.10-3.00	0.05-0.15	●	●	●									
	<b>120404 T7</b>	0.10-3.00	0.05-0.15				●								
	<b>120408</b>	0.10-3.00	0.05-0.20	●	●	●				●					
	<b>120408 T6</b>	0.10-3.00	0.05-0.20								●	●	●		
	<b>120412</b>	0.10-3.00	0.05-0.25	●	●	●				●					
	<b>120412 T6</b>	0.10-3.00	0.05-0.25											●	
	<b>120412 T7</b>	0.10-3.00	0.05-0.25				●								
	<b>120416</b>	0.10-3.00	0.05-0.30	●	●	●				●					
	<b>120416 T6</b>	0.10-3.00	0.05-0.30								●				
	<b>120416 T7</b>	0.10-3.00	0.05-0.30				●								
	<b>120708</b>	0.10-3.00	0.05-0.20	●	●	●									
	<b>120708 T6</b>	0.10-3.00	0.05-0.20								●				
	<b>120708 T7</b>	0.10-3.00	0.05-0.20				●								
	<b>120712</b>	0.10-3.00	0.05-0.25	●	●	●				●					
	<b>120712 T6</b>	0.10-3.00	0.05-0.25									●	●	●	
	<b>120712 T7</b>	0.10-3.00	0.05-0.25				●								
	<b>120716</b>	0.10-3.00	0.05-0.30	●		●									
	<b>120716 T7</b>	0.10-3.00	0.05-0.30				●								
	<b>150716</b>	0.10-3.50	0.05-0.30			●									
	<b>190716</b>	0.10-4.00	0.05-0.30			●									

● : Standard items




A77, A78,  
A128, A129, A159, A160,  
A210, A243



# SNGX-CH SNMG-CE




## Negative square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	4.76-7.94	0.8-1.6
<b>15</b>	15.8 8	7.94	1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic											
				AB2010	AB20	AB30	AW120	SC500	AS500	SC10	AS10	TC430	TC3020	TC3030	
 Dimple type	<b>SNGX 120712 CH</b>	0.10-3.00	0.05-0.30							●	●				
	<b>120716 CH</b>	0.10-3.00	0.05-0.35							●	●				
	<b>120716 T7-CH</b>	0.10-3.00	0.05-0.35					●	●		●				
	<b>150716 T7-CH</b>	0.10-3.50	0.05-0.35								●				
 Pressed type	<b>SNMG 120408 CE</b>	0.10-3.00	0.05-0.20			●									


 A77, A78,  
 A128, A129, A152,  
 A210, A243


● : Standard items



# TNGA TNGN TNMG-CE




## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>16</b>	9.52	4.76	0.4-1.6
<b>22</b>	12.7	4.76	0.4-1.6

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic											
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030		
	<b>TNGA 160404</b>	0.10-2.50	0.05-0.15	●	●	●									
	<b>160404 T2</b>	0.10-2.50	0.05-0.15			●									
	<b>160408</b>	0.10-2.50	0.05-0.20	●	●	●									
	<b>160408 T2</b>	0.10-2.50	0.05-0.20			●									
	<b>160412</b>	0.10-2.50	0.05-0.25	●	●	●									
	<b>160412 T2</b>	0.10-2.50	0.05-0.25			●									
	<b>160416</b>	0.10-2.50	0.05-0.30		●										
	<b>220404</b>	0.10-3.00	0.05-0.15		●	●									
	<b>220408</b>	0.10-3.00	0.05-0.20	●	●	●									
	<b>220412</b>	0.10-3.00	0.05-0.25		●	●									
	<b>220416</b>	0.10-3.00	0.05-0.30		●	●									
	<b>TNGN 160404</b>	0.10-2.50	0.05-0.15		●	●									
	<b>160408</b>	0.10-2.50	0.05-0.20	●	●	●				●					
	<b>160408 T7</b>	0.10-2.50	0.05-0.20				●								
	<b>160412</b>	0.10-2.50	0.05-0.25		●	●									
	<b>160412 T7</b>	0.10-2.50	0.05-0.25				●	●							
	<b>160416 T7</b>	0.10-1.00	0.05-0.20				●								
	<b>TNMG 160408 CE</b>	0.10-2.50	0.05-0.20			●									

Pressed type




●: Standard items

# VNGA VNGX-CH



## Negative 35° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>16</b>	9.52	4.76-7.94	0.4-1.2
<b>22</b>	12.7	4.76	1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic										
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030	
	<b>VNGA 160404</b>	0.05-1.00	0.05-0.10	●	●	●								
	<b>160408</b>	0.05-1.00	0.05-0.15	●	●	●								
	<b>160412</b>	0.05-1.50	0.05-0.20		●	●								
	<b>220412</b>	0.05-2.00	0.05-0.20			●								
 Dimple type	<b>VNGX 160712 T7-CH</b>	0.05-1.50	0.05-0.20							●				




A66, A67

● : Standard items

# WNGA



## Negative 80° trigon inserts



Size	Dimension (mm)		
	IC	S	RE
<b>08</b>	12.7	4.76	0.8-1.2

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic										
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030	
	<b>WNGA 080408</b>	0.10-2.50	0.05-0.25	●	●	●			●	●				
	<b>080408 T7-WZ</b>	0.10-2.50	0.05-0.25	●	●									
	<b>080412</b>	0.10-2.50	0.05-0.25	●	●	●			●	●				
	<b>080412 T7</b>	0.10-2.50	0.05-0.25					●						




A68, A81,  
A136, A181,  
A207, A246

● : Standard items

# RCGX RPGN RPGX T11-



## Positive round inserts



Size	Dimension (mm)		Size	Dimension (mm)	
	IC	S		IC	S
<b>06</b>	6.35	3.18-6.35	<b>19</b>	19.05	10.0
<b>09</b>	9.52	7.94	<b>25</b>	25.4	12.0
<b>12</b>	12.7	4.76-7.94	<b>T11</b>	31.9	19.05
<b>15</b>	15.88	8			

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic										
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030	
 	<b>RCGX 060600 T6</b>	0.10-2.00	0.05-0.25									●		
	<b>060600 U1</b>	0.10-2.00	0.05-0.25			●								
	<b>090700 E</b>	0.10-3.00	0.05-0.35										●	●
	<b>090700 E04</b>	0.10-3.00	0.05-0.30										●	●
	<b>090700 T6</b>	0.10-3.00	0.05-0.30									●	●	●
	<b>090700 U1</b>	0.10-3.00	0.05-0.30		●	●							●	●
	<b>120700</b>	0.10-4.00	0.05-0.35			●								
	<b>120700 E</b>	0.10-4.00	0.05-0.35										●	●
	<b>120700 E04</b>	0.10-4.00	0.05-0.35										●	●
	<b>120700 T6</b>	0.10-4.00	0.05-0.35									●	●	●
	<b>120700 U2</b>	0.10-4.00	0.05-0.35		●	●							●	●
	<b>151000 U2</b>	0.10-5.00	0.05-0.35		●	●								
	<b>191000 U2</b>	0.10-5.00	0.05-0.35		●	●								
<b>251200 U3 *</b>	0.10-5.00	0.05-0.35			●									
	<b>RPGN 060300 E</b>	0.10-2.00	0.05-0.25											●
	<b>120400 E</b>	0.10-4.00	0.05-0.35										●	●
	<b>120400 T6</b>	0.10-4.00	0.05-0.35									●	●	●
	<b>RPGX 090700 E</b>	0.10-3.00	0.05-0.35										●	●
	<b>090700 T6</b>	0.10-3.00	0.05-0.35									●	●	●
	<b>120700 E</b>	0.10-4.00	0.05-0.35										●	●
	<b>120700 T6</b>	0.10-4.00	0.05-0.35									●	●	●
	<b>T11- 3219</b>	0.10-5.00	0.05-0.35		●									


A145-A147

● \* Marked: This is the only item with a 140° bottom

●: Standard items



## Positive square inserts



Size	Dimension (mm)		
	IC	S	RE
<b>12</b>	12.7	3.18-4.76	0.8-1.2


Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic									
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030
	<b>SPGN 120308</b>	0.10-3.50	0.05-0.20			●				●			
	<b>120412</b>	0.10-3.50	0.05-0.20							●			



● : Standard items

# TPGN

## Positive triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>11</b>	6.35	3.18	0.4-0.8
<b>16</b>	9.52	3.18	0.4-0.8
<b>22</b>	12.7	4.76	0.8

Insert	Designation	ap (mm)	Feed (mm/rev)	Ceramic									
				AB2010	AB20	AB30	AW120	AS500	SC10	AS10	TC430	TC3020	TC3030
	<b>TPGN 110304</b>	0.10-2.00	0.05-0.10	●	●	●							
	<b>110308</b>	0.10-2.00	0.05-0.10	●	●	●							
	<b>160304</b>	0.10-2.50	0.05-0.15	●	●	●							
	<b>160308</b>	0.10-2.50	0.05-0.20	●	●	●							
	<b>160308 T6</b>	0.10-2.50	0.05-0.20								●		
	<b>220408</b>	0.10-3.00	0.05-0.20			●							




● : Standard items

# CNGA CNGN-SD CNGX-DA



## Negative 80° rhombic inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	3.18	0.8
<b>12</b>	12.7	4.76	0.4-1.6

Insert	Designation	LE (mm)	ap (mm)	Feed (mm/rev)	CBN						PCD				
					TB610	TB650	TB670	TB730	TB7015	TB7020	TD810	KP300	TD830		
	<b>CNGA 120404 WZ-LS</b>	2.1	0.10-0.50	0.05-0.30		●									
	<b>120404 WZ-LS2</b>	2.1	0.10-0.50	0.05-0.30	●	●	●								
	<b>120408 WZ-LS</b>	2.1	0.10-0.50	0.05-0.30		●			●						
	<b>120408 WZ-LS2</b>	2.1	0.10-0.50	0.05-0.30	●	●	●	●							
	<b>120408 WZ-LS4</b>	2.1	0.10-0.50	0.05-0.30	●	●	●								
	<b>120412 WZ-LS</b>	2.5	0.10-0.50	0.05-0.30		●			●						
	<b>120412 WZ-LS2</b>	2.5	0.10-0.50	0.05-0.30		●	●	●							
	<b>120412 WZ-LS4</b>	2.5	0.10-0.50	0.05-0.30			●								
	<b>CNGA 120404 LN</b>	4.2	0.10-0.50	0.05-0.30	●		●		●						
	<b>120404 LS</b>	2.2	0.10-0.50	0.05-0.30					●						
	<b>120404 LS2</b>	2.2	0.10-0.50	0.05-0.30	●	●	●	●							
	<b>120404 LS4</b>	2.2	0.10-0.50	0.05-0.30		●	●								
	<b>120408 LN</b>	4.0	0.10-0.50	0.05-0.30	●	●		●	●						
	<b>120408 LN4</b>	4.0	0.10-0.50	0.05-0.30		●									
	<b>120408 LS</b>	2.1	0.10-0.50	0.05-0.30		●			●						
	<b>120408 LS2</b>	2.1	0.10-0.50	0.05-0.30	●	●	●	●	●						
	<b>120408 LS4</b>	2.1	0.10-0.50	0.05-0.30		●	●	●	●						
	<b>120412 LN</b>	3.9	0.10-0.50	0.05-0.30	●		●		●						
	<b>120412 LS2</b>	2.5	0.10-0.50	0.05-0.30		●		●	●						
<b>120412 LS4</b>	2.5	0.10-0.50	0.05-0.30			●	●								
	<b>CNGA 120404 LN-10</b>	4.0	0.10-3.00	0.05-0.25								●	●		
	<b>120408 LN-10</b>	3.9	0.10-3.00	0.05-0.25								●	●		
	<b>120412 LN-10</b>	3.8	0.10-3.00	0.05-0.25									●		
	<b>CNGN 090308 SD</b>	-	0.10-3.00	0.05-0.30						●					
	<b>120412 SD</b>	-	0.10-4.00	0.05-0.30						●					
	<b>120416 SD</b>	-	0.10-4.00	0.05-0.30						●					
	<b>CNGX 120412 DA</b>	-	0.10-4.00	0.05-0.30						●					
	<b>120416 DA</b>	-	0.10-4.00	0.05-0.30						●					

A69-A71, A148, A153, A155, A178, A208, A238

●: Standard items

## Negative 55° rhombic inserts

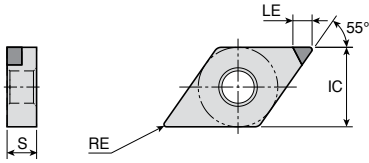

Size	Dimension (mm)		
	IC	S	RE
<b>15</b>	12.7	4.76-6.35	0.4-1.2

Insert	Designation	LE (mm)	ap (mm)	Feed (mm/rev)	CBN						PCD			
					TB610	TB650	TB670	TB730	TB7015	TB7020	TD810	KP300	TD830	
	<b>DNGA 150404 LN</b>	4.2	0.10-0.50	0.05-0.30	●	●	●							
	<b>150404 LS</b>	2.6	0.10-0.50	0.05-0.30		●			●					
	<b>150404 LS2</b>	2.6	0.10-0.50	0.05-0.30	●	●	●							
	<b>150404 LS4</b>	2.6	0.10-0.50	0.05-0.30	●	●	●							
	<b>150408 LN</b>	3.9	0.10-0.50	0.05-0.30	●	●	●		●					
	<b>150408 LS</b>	2.3	0.10-0.50	0.05-0.30		●			●					
	<b>150408 LS2</b>	2.3	0.10-0.50	0.05-0.30	●	●	●	●						
	<b>150408 LS4</b>	2.3	0.10-0.50	0.05-0.30			●							
	<b>150412 LN</b>	3.5	0.10-0.50	0.05-0.30		●			●					
	<b>150412 LS2</b>	2.2	0.10-0.50	0.05-0.30			●	●						
	<b>150412 LS4</b>	2.2	0.10-0.50	0.05-0.30			●							
	<b>150604 LN</b>	4.2	0.10-0.50	0.05-0.30		●	●	●	●					
	<b>150604 LS</b>	2.6	0.10-0.50	0.05-0.30		●								
	<b>150604 LS2</b>	2.6	0.10-0.50	0.05-0.30	●	●	●	●						
	<b>150608 LN</b>	3.9	0.10-0.50	0.05-0.30	●	●	●	●						
	<b>150608 LS2</b>	2.3	0.10-0.50	0.05-0.30	●	●	●	●	●					
	<b>150608 LS4</b>	2.3	0.10-0.50	0.05-0.30			●							
<b>150612 LS2</b>	2.2	0.10-0.50	0.05-0.30			●								
	<b>DNGA 150404 LN-10</b>	4.0	0.10-2.50	0.05-0.20								●	●	
	<b>150408 LN-10</b>	3.7	0.10-2.50	0.05-0.20								●	●	
	<b>150604 LN-10</b>	4.0	0.10-2.50	0.05-0.20								●	●	
	<b>150608 LN-10</b>	3.7	0.10-2.50	0.05-0.20								●	●	

A63, A64,  
A72, A73,  
A178, A209, A240


● : Standard items








# SNGA SNGN-SD SNGX-DA




## Negative square inserts




Size	Dimension (mm)		
	IC	S	RE
<b>09</b>	9.52	3.18	1.2
<b>12</b>	12.7	4.76	0.4-1.6

Insert	Designation	LE (mm)	ap (mm)	Feed (mm/rev)	CBN						PCD			
					TB610	TB650	TB670	TB730	TB7015	TB7020	TD810	KP300	TD830	
	<b>SNGA 120404 LS2</b>	2.5	0.10-0.50	0.05-0.30			●	●						
	<b>120408 LN</b>	4.2	0.10-0.50	0.05-0.30		●			●					
	<b>120408 LS</b>	2.5	0.10-0.50	0.05-0.30		●								
	<b>120408 LS2</b>	2.5	0.10-0.50	0.05-0.30				●	●					
	<b>120408 LS4</b>	2.5	0.10-0.50	0.05-0.30				●						
	<b>120408 LS8</b>	2.5	0.10-0.50	0.05-0.30				●						
 	<b>SNGA 120408 LN-10</b>	4.0	0.10-3.00	0.05-0.20									●	
	<b>120412 LN-10</b>	4.0	0.10-3.00	0.05-0.20									●	
 Solid CBN	<b>SNGN 090312 SD</b>	-	0.10-3.00	0.05-0.30						●				
	<b>120416 SD</b>	-	0.10-4.00	0.05-0.30						●				
 Dimple type	<b>SNGX 120416 DA</b>	-	0.10-4.00	0.05-0.30						●				

 A77, A78, A128, A129, A154, A159, A160, A210, A243

● : Standard items

## Negative triangular inserts



Size	Dimension (mm)		
	IC	S	RE
<b>16</b>	9.52	4.76	0.4-1.2
<b>22</b>	12.7	4.76	0.4-0.8

Insert	Designation	LE (mm)	ap (mm)	Feed (mm/rev)	CBN						PCD			
					TB610	TB650	TB670	TB730	TB7015	TB7020	TD810	KP300	TD830	
	<b>TNGA 160404 LN</b>	4.3	0.10-0.50	0.05-0.30	●	●		●						
	<b>160404 LS</b>	2.2	0.10-0.50	0.05-0.30		●								
	<b>160404 LS3</b>	2.2	0.10-0.50	0.05-0.30	●		●	●						
	<b>160404 LS6</b>	2.2	0.10-0.50	0.05-0.30		●								
	<b>160408 LN</b>	4.0	0.10-0.50	0.05-0.30		●	●		●					
	<b>160408 LS3</b>	2.1	0.10-0.50	0.05-0.30	●	●	●	●	●					
	<b>160408 LS6</b>	2.1	0.10-0.50	0.05-0.30			●							
	<b>160412 LS3</b>	2.5	0.10-0.50	0.05-0.30			●							
	<b>220404 LN</b>	4.1	0.10-0.50	0.05-0.30		●								
	<b>220408 LS</b>	2.6	0.10-0.50	0.05-0.30		●								
	<b>TNGA 160404 LN-10</b>	4.3	0.10-3.00	0.05-0.20								●	●	


- A65, A79, A80,
- A143, A144, A180,
- A211, A248

●: Standard items





## Positive 80° rhombic inserts



Size	Dimension (mm)		
	IC	S	RE
<b>06</b>	6.35	2.38	0.2-0.8
<b>09</b>	9.52	3.97	0.2-0.8
<b>12</b>	12.7	4.76	0.4-0.8

Insert	Designation	LE (mm)	ap (mm)	Feed (mm/rev)	CBN					PCD				
					TB610	TB650	TB670	TB730	TB7015	TB7020	TD810	KP300	TD830	
	<b>CCGW 060202 LS</b>	2.4	0.05-0.50	0.05-0.30		●			●					
	<b>060202 LS2</b>	2.2	0.05-0.50	0.05-0.30			●	●						
	<b>060204 LS</b>	2.4	0.05-0.50	0.05-0.30		●			●					
	<b>060204 LS2</b>	2.1	0.05-0.50	0.05-0.30	●		●	●						
	<b>060208 LS2</b>	2.1	0.05-0.50	0.05-0.30	●		●	●						
	<b>09T304 LS</b>	2.4	0.05-0.50	0.05-0.30			●		●					
	<b>09T304 LS2</b>	2.4	0.05-0.50	0.05-0.30	●	●	●	●	●					
	<b>09T304 WZ-LS</b>	2.8	0.05-0.50	0.05-0.30		●								
	<b>09T304 WZ-LS2</b>	2.4	0.05-0.50	0.05-0.30			●	●						
	<b>09T308 LS</b>	2.3	0.05-0.50	0.05-0.30		●			●					
	<b>09T308 LS2</b>	2.3	0.05-0.50	0.05-0.30	●		●	●						
	<b>09T308 WZ-LS</b>	2.3	0.05-0.50	0.05-0.30		●								
	<b>09T308 WZ-LS2</b>	2.3	0.05-0.50	0.05-0.30		●		●						
	<b>120404 LS2</b>	2.1	0.05-0.50	0.05-0.30					●					
	<b>120408 LS</b>	2.5	0.05-0.50	0.05-0.30					●					
<b>120408 LS2</b>	2.1	0.05-0.50	0.05-0.30				●							
	<b>CCGT 060204 CB</b>	3.1	0.50-1.50	0.10-0.50									●	
	<b>09T302 CB</b>	4.15	0.50-2.00	0.10-0.50									●	
	<b>09T304 CB</b>	4.1	0.50-2.00	0.10-0.50									●	
	<b>09T308 CB</b>	4.0	0.50-2.00	0.10-0.50									●	
	<b>120404 CB</b>	4.1	0.50-2.00	0.10-0.50									●	
	<b>120408 CB</b>	4.0	0.50-2.00	0.10-0.50									●	
	<b>CCGW 060202 LN-7</b>	3.1	0.08-3.00	0.05-0.30								●	●	
	<b>060204 LN-7</b>	3.1	0.08-3.00	0.05-0.30								●	●	
	<b>09T304 LN-7</b>	4.0	0.10-3.00	0.05-0.30								●	●	
	<b>09T308 LN-7</b>	3.9	0.10-3.00	0.05-0.30								●	●	
	<b>120404 LN-7</b>	4.0	0.10-3.00	0.05-0.30								●	●	
	<b>120408 LN-7</b>	3.9	0.10-3.00	0.05-0.30								●	●	

● : Standard items

A82-A84,  
 A113, A183,  
 A212, A213, A255